


HIDDEN (NHI 45 PM)

Surface-Mounted

"HIDDEN" Linear Luminaire

Body Information


Body Material	Aluminum
Color	Standard White
Optic	Diffuser
Optic Material	Polycarbonate
Wiring	0.7 mm Solid wire
Terminal Block	Poly Carbonate
Installation	Surface-Mounted

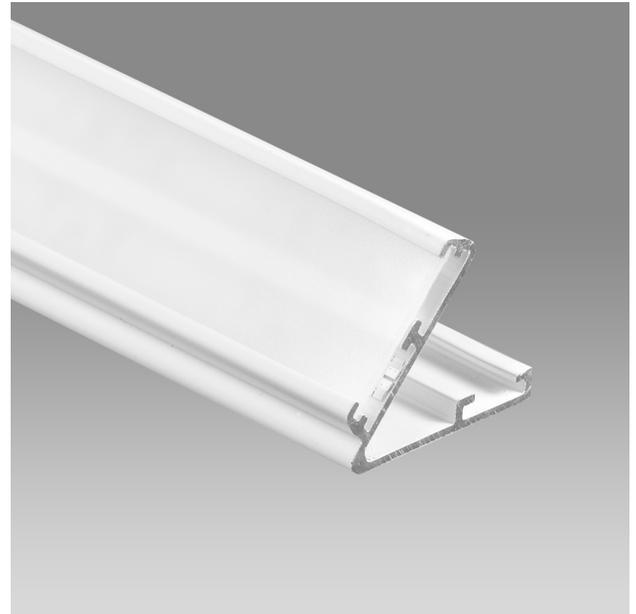


Technical Information

Light Source	LED
Light Source Luminous Flux	600, 1200, 1500, 1800, 2500 lm/m
Luminaire Luminous Flux	360, 720, 900, 1080, 1500 lm/m
Luminaire Efficacy	127.6, 141.1, 120, 125.8, 132.9 lm/w
CCT	3000K / 4000K
Color Rendering Index	CRI > Ra80
MacAdam	3 SDCM
LED Brand	Tridonic / OSRAM
Driver Brand	Tridonic / TCI
Power Consumption	4.7, 8.5, 12.5, 14.3, 18.8 W/m
Input Voltage	24 V _{DC}
THD	< 10%
Power Factor	> 0.9
Ingress Protection	IP20 / IP54
Life Long	L70B50 > 60,000 h
Controllability	Not Dimmable / DALI-2

Dimensional Drawings

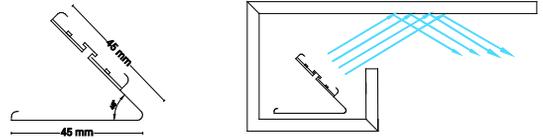

Light Distribution Curve

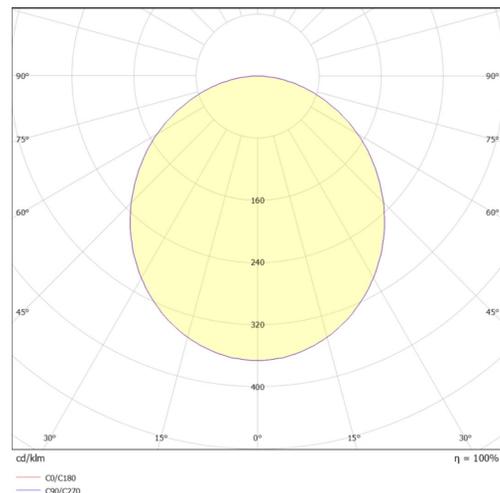

Product Web Page



Product Catalog

