

VERONA (NVE 21 PC)


Recessed

NEXO
LIGHTING

"VERONA" Linear Luminaire

Body Information


Housing	Extruded Aluminum
Color	Electrostatic Powder Coating
Optic	Diffuser
Optical Detail	Polycarbonate
Wiring	0.7 mm Solid wire
Terminal Block	Poly Carbonate
Installation	Recessed

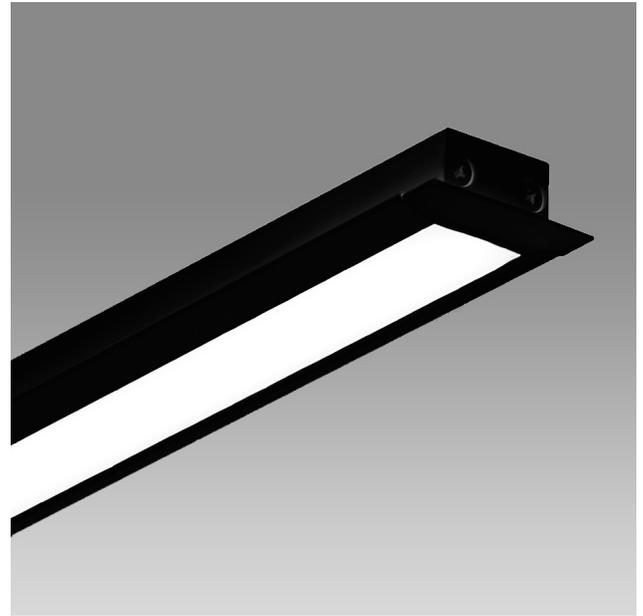


Technical Information

Light Source	LED
Light Source Luminous Flux	600, 1200, 1500, 1800, 2500 lm/m
Luminaire Luminous Flux	360, 720, 900, 1080, 1500 lm/m
Luminaire Efficacy	127.6, 141.1, 120, 125.8, 132.9 lm/w
CCT	3000K / 4000K
Color Rendering Index	CRI > Ra80
MacAdam	3 SDCM
LED Brand	Tridonic / OSRAM
Driver Brand	Tridonic / TCI
Power Consumption	4.7, 8.5, 12.5, 14.3, 18.8 W/m
THD	< 10%
Power Factor	> 0.9
Ingress Protection	IP20 / IP 54
Life Long	L70B50 > 60,000 h
Controllability	Not Dimmable / DALI-2 Dimmable

Dimensional Drawings

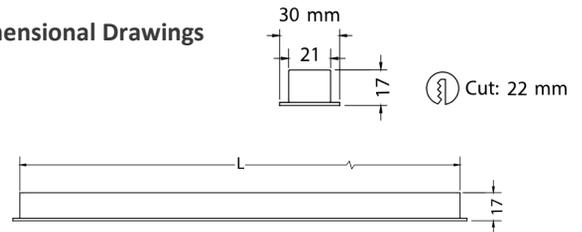

Light Distribution Curve

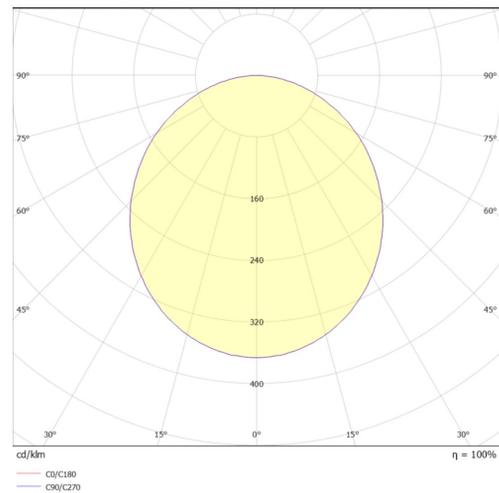

Product Web Page



Product Catalog

