

TRIMO (NTR C 60 PCIT)


Recessed

NEXO
LIGHTING

"TRIMO" Low-glare downlight

Body Information


Housing	Diescast Aluminum
Color	Electrostatic Powder Coating
Optic	Diffuser
Optical Detail	Polycarbonate Material
Wiring	0.7 mm Solid wire
Terminal Block	Poly Carbonate
Installation	Recessed

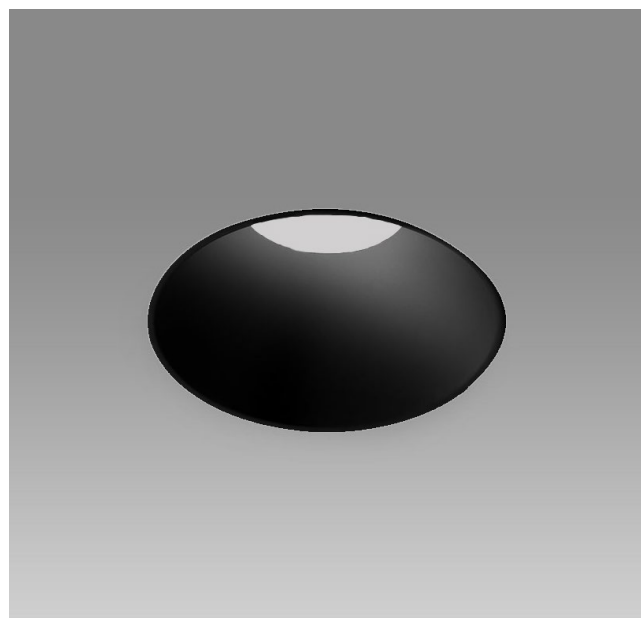

Technical Information


Light Source	LED
Luminous Flux	500 lm
Luminaire Efficacy	100 lm/w
CCT	3000K / 4000K
Color Rendering Index	CRI > Ra90
MacAdam	3 SDCM
LED Brand	Tridonic / OSRAM
Driver Brand	Tridonic / TCI
Power Consumption	5 W
THD	< 10%
Power Factor	> 0.9
Ingress Protection	IP20 / IP44
Life Long	L70B50 > 60,000 h
Controllability	Not Dimmable / DALI-2 Dimmable

Dimensional Drawings



Cut : Ø60mm
Trimo c 60 ALIT

Light Distribution Curve

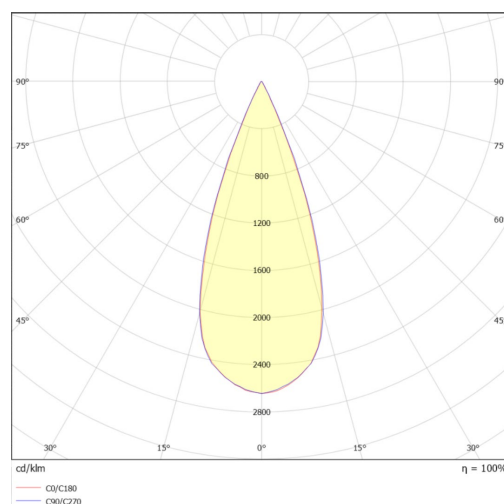

Product Web Page



Product Catalog

