

# UNIQUE (NU 60 R PCT 48V)

Track-Mounted

## “UNIQUE MAGNETIC TRACK” Spot Luminaire

### Body Information


Housing	Extruded Aluminum
Color	Electrostatic Powder Coating
Optic	Anodized Reflector
Optical Detail	20° / 30° / 50° beam angle
Wiring	0.7 mm Solid wire
Terminal Block	Poly Carbonate
Installation	Magnetic Track-Mounted



### Technical Information


Light Source	LED
Luminous Flux	1,230 lm
Luminaire Efficacy	123 lm/w
CCT	3000K/4000K
Color Rendering Index	CRI > Ra90
MacAdam	3 SDCM
LED Brand	Tridonic / OSRAM
Driver Brand	Tridonic / TCI
Power Consumption	10 W
THD	< 10%
Power Factor	> 0.9
Ingress Protection	IP20
Life Long	L70B50 > 60,000 h
Controllability	Not Dimmable / DALI-2 Dimmable

### Dimensional Drawings



NU 60 ... PCT 48v

### Light Distribution Curve

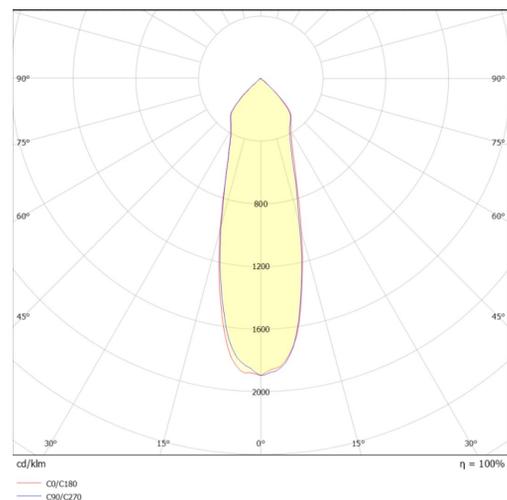

### Product Web Page



### Product Catalog

