

SLIDE (NSLI 60 R PCI)


Recessed

NEXO
LIGHTING

"SLIDE" Trimless Spot Retractable Luminaire

Body Information


Housing	Extruded Aluminum
Color	Electrostatic Powder Coating
Optic	Anodized PC Reflector
Optical Detail	20°, 30°, 50° beam angle
Wiring	0.7 mm Solid wire
Terminal Block	Poly Carbonate
Installation	Recessed

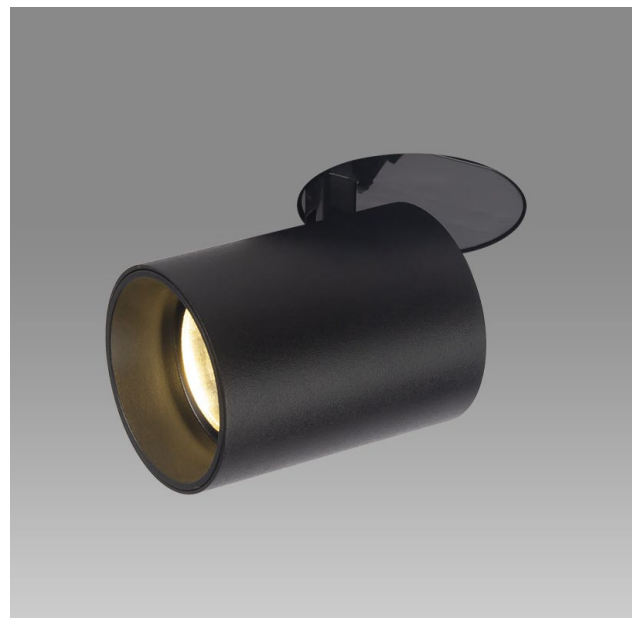


Technical Information

Light Source	LED
Luminous Flux	1,230 lm
Luminaire Efficacy	80.5 lm/w
CCT	3000K / 4000K
Color Rendering Index	CRI > Ra90
MacAdam	3 SDCM
LED Brand	Tridonic / CREE / OSRAM
Driver Brand	Tridonic / TCI
Power Consumption	10 W
THD	< 10%
Power Factor	> 0.9
Ingress Protection	IP20
Life Long	L70B50 > 60,000 h
Controllability	Not Dimmable / DALI-2 Dimmable

Dimensional Drawings

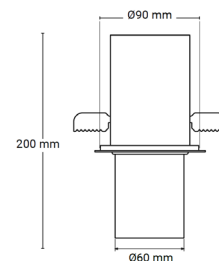

Light Distribution Curve

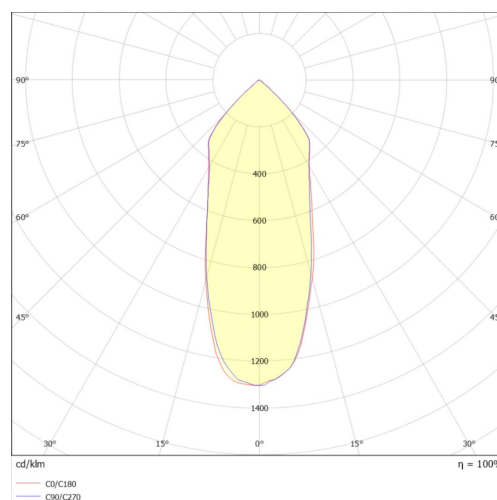

Product Web Page



Catalog Product

