

WALLIE (NWA 90 PC)

Wall-Mounted

“WALLIE” Wall-mounted linear

Body Information


| | |
|----------------|------------------------------|
| Housing | Extruded Aluminum |
| Color | Electrostatic Powder Coating |
| Optic | Diffuser |
| Optical Detail | Polycarbonate |
| Wiring | 0.7 mm Solid wire |
| Terminal Block | Poly Carbonate |
| Installation | Wall-Mounted |




Technical Information

| | |
|-----------------------|-------------------------|
| Light Source | LED |
| Luminous Flux | 2,002 lm |
| Luminaire Efficacy | 100.1 lm/w |
| CCT | 3000K / 4000 K |
| Color Rendering Index | CRI > Ra80 |
| MacAdam | 3 SDCM |
| LED Brand | Tridonic |
| Driver Brand | Tridonic / TCI |
| Power Consumption | 20 W |
| THD | < 10% |
| Power Factor | > 0.9 |
| Ingress Protection | IP20 |
| Life Long | L70B50 > 60,000 h |
| Controllability | Dimmable / Not-Dimmable |

Dimensional Drawings

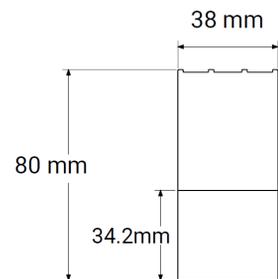

Light Distribution Curve

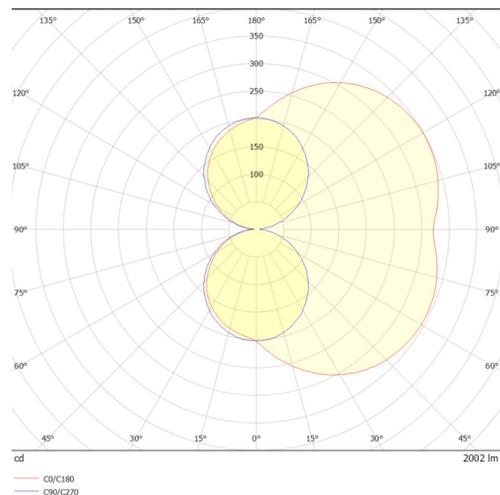

Product Web Page



Product Catalog

