

PICO DOUBLE (NPIC DOU L PMI)


Recessed

NEXO
LIGHTING

"PICO DOUBLE" Downlight Luminaire

Body Information


Housing	Diecast aluminum
Color	Powder coating
Optic	Lens
Optical Detail	Focal lens with 41° / 59° beam angle
Wiring	0.7 mm Solid wire
Terminal Block	Poly Carbonate
Installation	Recessed

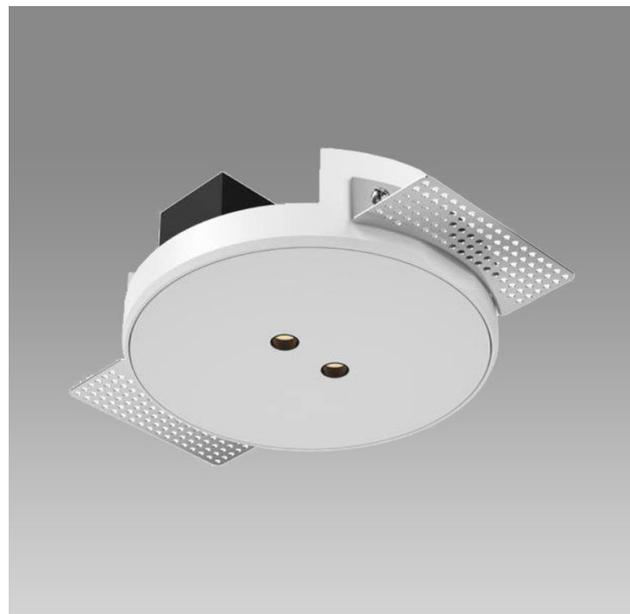


Technical Information

Light Source	LED
Luminous Flux	462 lm
Luminaire Efficacy	46 lm/w
CCT	3000K / 4000K
Color Rendering Index	CRI > Ra90
MacAdam	3 SDCM
LED Brand	Tridonic / CREE
Driver Brand	Tridonic / TCI
Power Consumption	10 W
THD	< 10%
Power Factor	> 0.9
Ingress Protection	IP20
Life Long	L70B50 > 60,000 h
Controllability	Not Dimmable / DALI-2 Dimmable

Dimensional Drawings

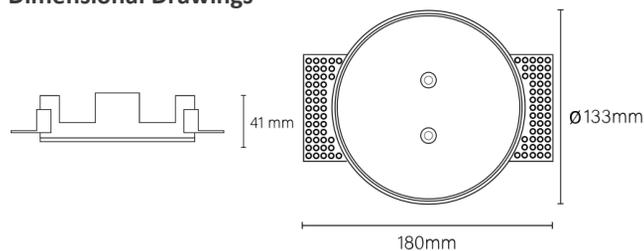

Light Distribution Curve

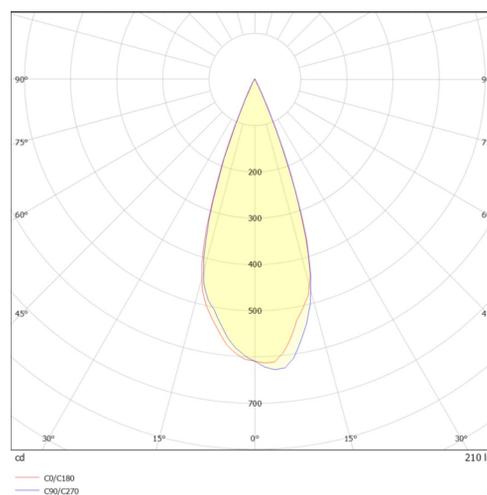

Product Web Page



Product Catalog

