

NEXO LIGHTING

1 R 0 1 1 N 1 0 N 1 0 M
N 2 N 6 N E 3 N 0 1 0 N
R 0 1 1 N 1 G L 0 1 L 1 0 2 H 0 L 1
0 1 2 0 1 N 1 R N R 0 1 1 1 1 M 0 G
1 1 N R 5 N 6 9 3 0 N 1 0 N 0 1 9 0
N 2 N 6 N R 3 N 0 1 0 N 1 G 1 9 0 R
R 0 1 1 N 0 G L 0 1 L 1 0 2 H 0 L 1
0 1 2 0 1 N 1 R N R 0 1 1 1 1 M 0 G
N 1 2 R 5 N 6 9 3 0 N 1 0 M 0 1 9 0
R 0 1 1 N 0 G L 0 L 1 0 0 2 H 0 L 1
0 1 2 0 1 N 1 R N 0 1 1 0 1 1 M 0 G
1 1 N R 5 N 6 9 3 0 N 0 N 0 G 1 9 1
N 1 **N E W** N 6 9 3 N 1 0 M 0 G 1 9 0
0 1 **L A N G U A G E** 0 1 0 1 1 M 0 G
1 1 **O F** 5 N 6 9 3 0 N 1 0 0 G 1 9 0
N 1 **L I G H T** 9 3 0 N 1 0 M G 1 9 0
N 1 2 L A N G U A G E 0 1 1 0 G 1 0
0 1 2 0 1 N 1 R N R 0 1 1 1 1 M 0 G
N 1 2 R 5 N 6 9 3 0 N 1 0 0 G 1 9 0
1 1 N R 5 N 6 9 3 0 N 1 0 N G 1 9 0
N 1 2 R 5 N 6 9 3 0 N 1 0 M G 1 9 0
1 R 0 1 1 N 1 0 N 1 0 M 0 L I G T 1
N 2 N 6 N R 3 N 0 1 0 N 1 G 1 1 **2** R
R 0 1 1 N 0 G L 0 1 L 1 0 0 2 H **0** 1
0 1 2 0 1 N 1 R N R 0 1 1 0 1 1 **2** 0
1 1 N R 5 N 6 9 3 0 N 1 0 N 0 0 **6** 1
N 2 N 6 N R 3 N 0 1 0 N 1 G 1 1 9 0
R 0 1 1 N 0 G L 0 1 L 1 0 0 H 0 0 0



5
YEAR
GUARANTEE

Today, a successful collaboration is not only based on the production of a good product, but also depends on the support and after-sales service.

Sending catalogs to customers, preparation and presentation of photometric, BIM, 3DS files for use in lighting softwares such as: Dialux, 3DMAX, Revit, etc..., presentation of installation videos, are performed by NEXO during the customer relationship process.

Nexo is responsible for all services and guarantees its products for 5 years.

The guarantee and after-sales services are issued on condition that the customer completes an online registration or call


+971522567107



nexolighting.com/warranty

INDEX

Bim Objects



3D Objects


32

Systems



Multi Track System

96




Glory Track System

134



Link System

154



Canal System

154



Spot-Line System


156

Linear Luminaires




ProLine

162



Arc Line

166



Line

168



Up-Down Line

176




Verona-Slim-Hidden

184



Guide Line

186



Corner Line

188



Curve Line

194



View

198

Downlights



Manna/Manna mini

202



Pinto

206



Pinto - L

208



Pico

210




Mellow

212



Nexo

214



Cube

216



Slide

218




Trimo

220




Elva

224



lenza

226



Lenza square

228



Link Surface

230



Echo

232



Echo +

236

Pendants, Spot & Tracks



Silva

235



Unique Surface Mount

236



Unique Track Mount

237



Glance

240



Moonico


242



Duke

244

Architectural & General



Flex Tube

246




Icon

254



Ringo

258




Linno

262



Relax

266



Relax Cleanroom

268



Bermuda

270



Art line

271



Hexa

272

Floor and Wall



Viva

276




Dream

278



Wink

279



Wallie

280



Prima

281



Blink

282



Nova

284

Industrial



Guard

285



Modular Bright

288




Rainled

289



digital version of the catalog

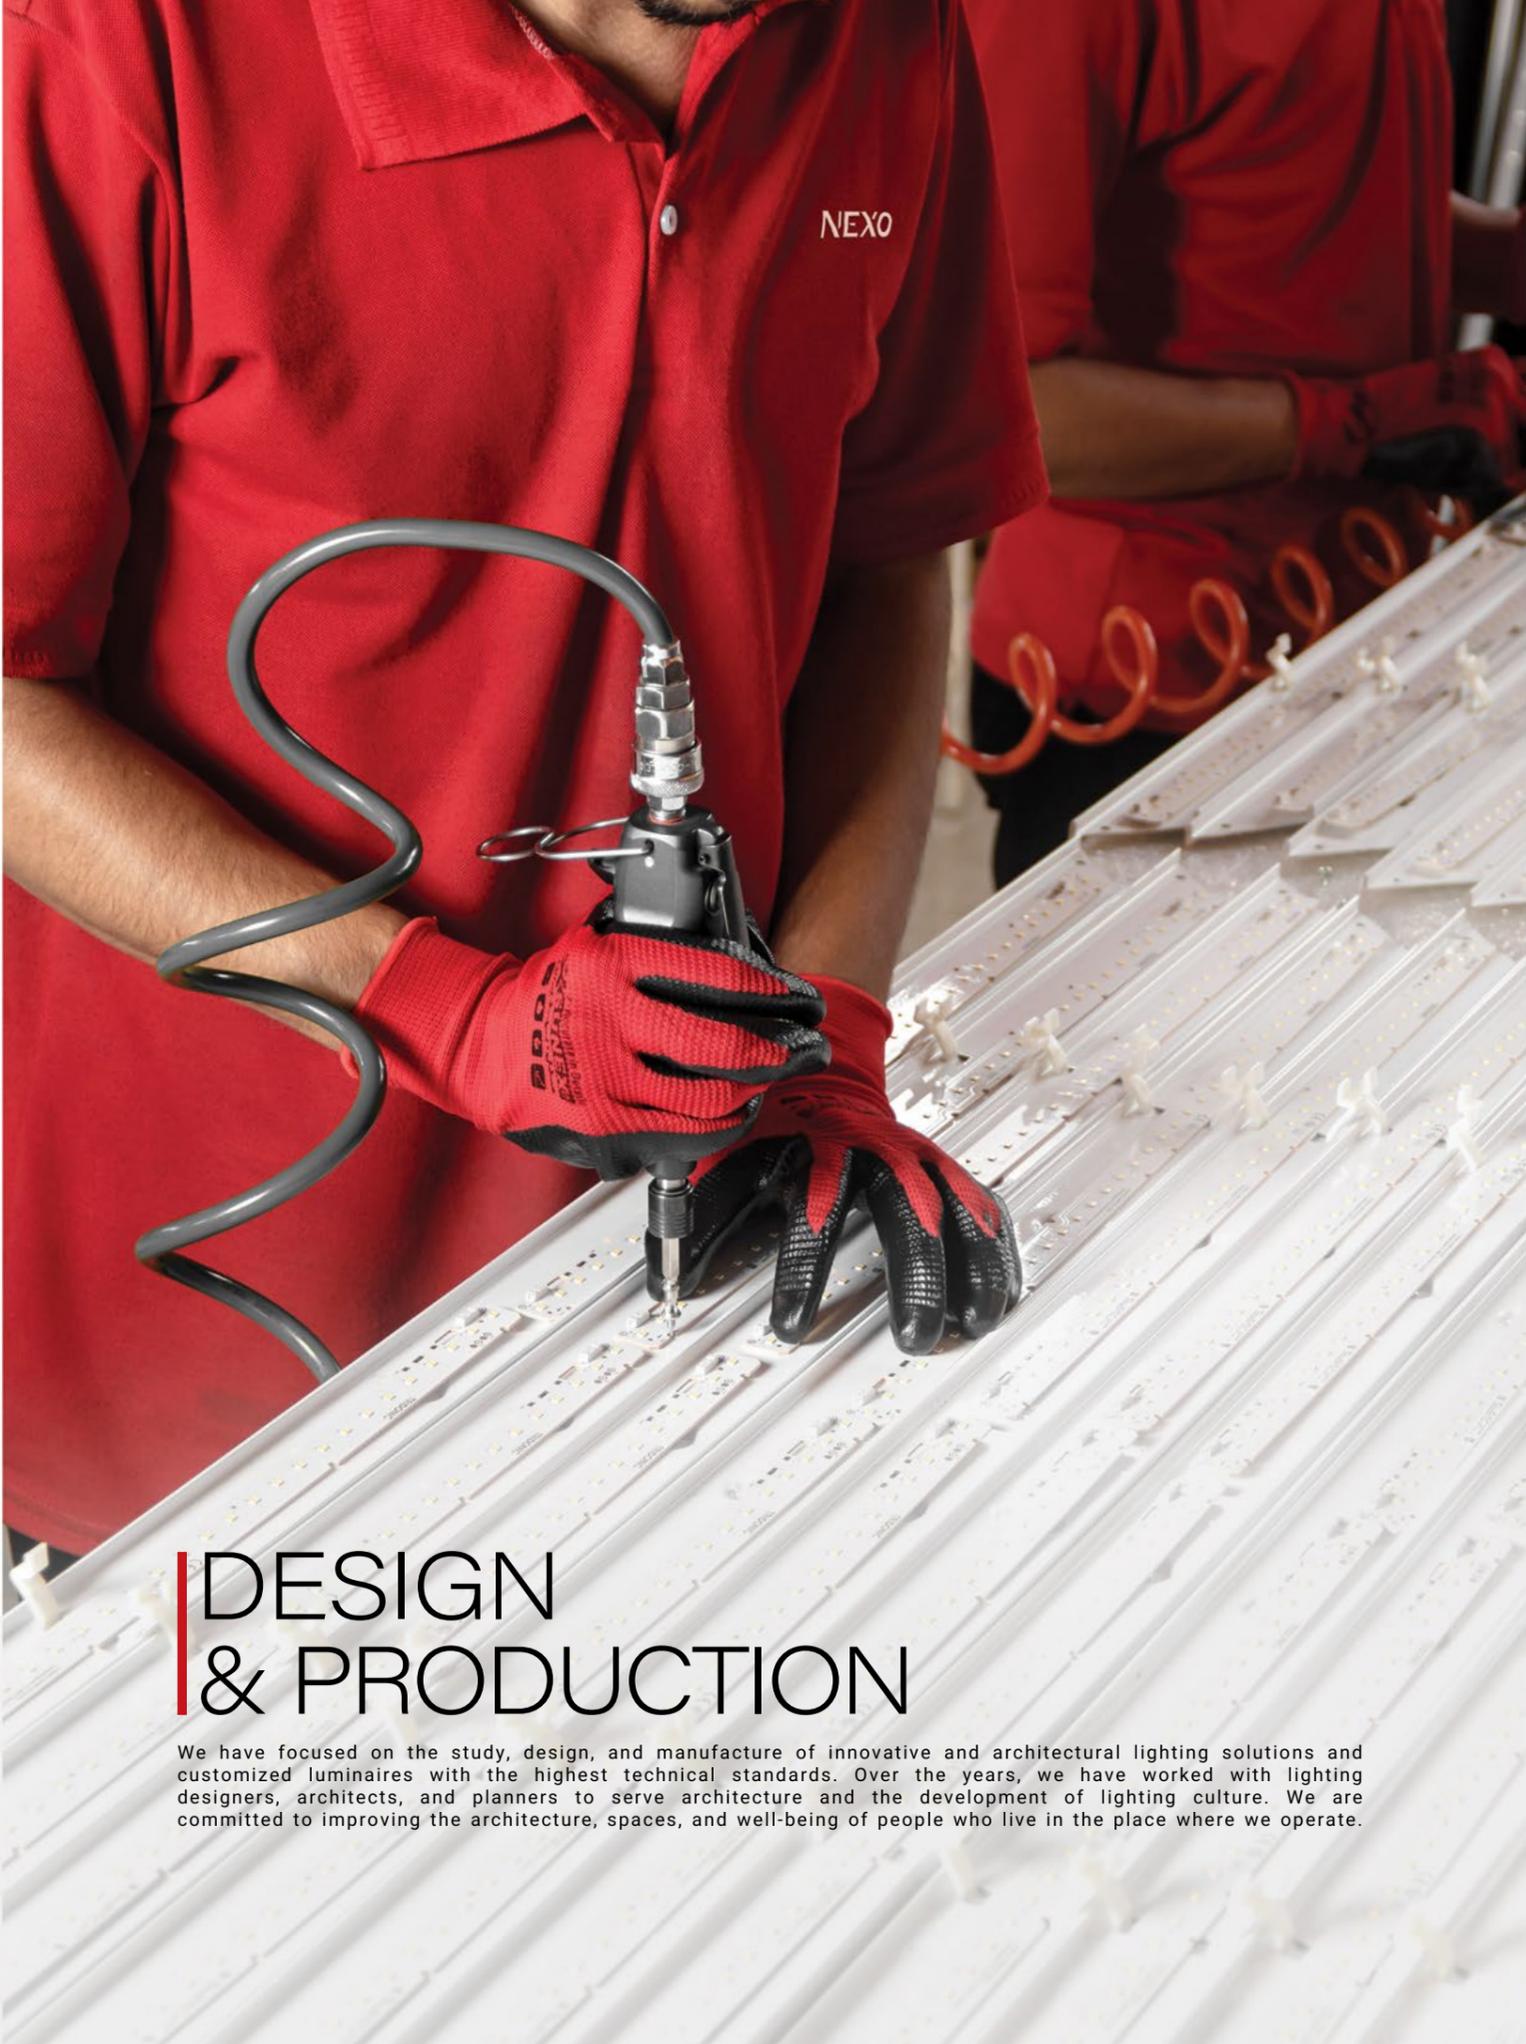


DESIGN & PRODUCTION

We have focused on the study, design, and manufacture of innovative and architectural lighting solutions and customized luminaires with the highest technical standards. Over the years, we have worked with lighting designers, architects, and planners to serve architecture and the development of lighting culture. We are committed to improving the architecture, spaces, and well-being of people who live in the place where we operate.



more information

BESPOKE SOLUTION

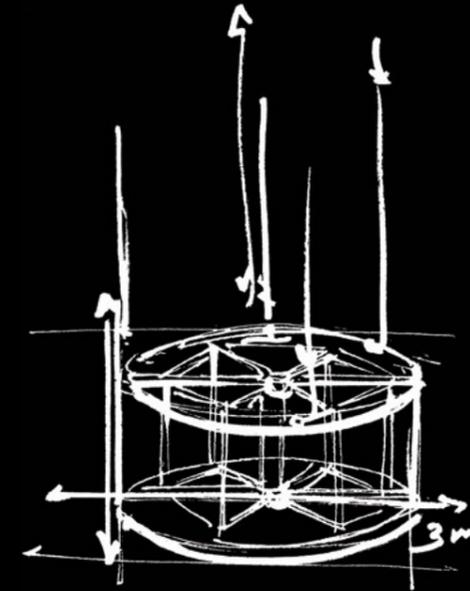


Contrary to the architectural trends in recent years, customization has found its place in public projects as well. The dowlat Shiraz urban train station project is one such example, utilizing custom three-meter diameter lights in accordance with urban train requirements, executed in collaboration with Barrisol, a French company.

more information





BESPOKE
SOLUTION

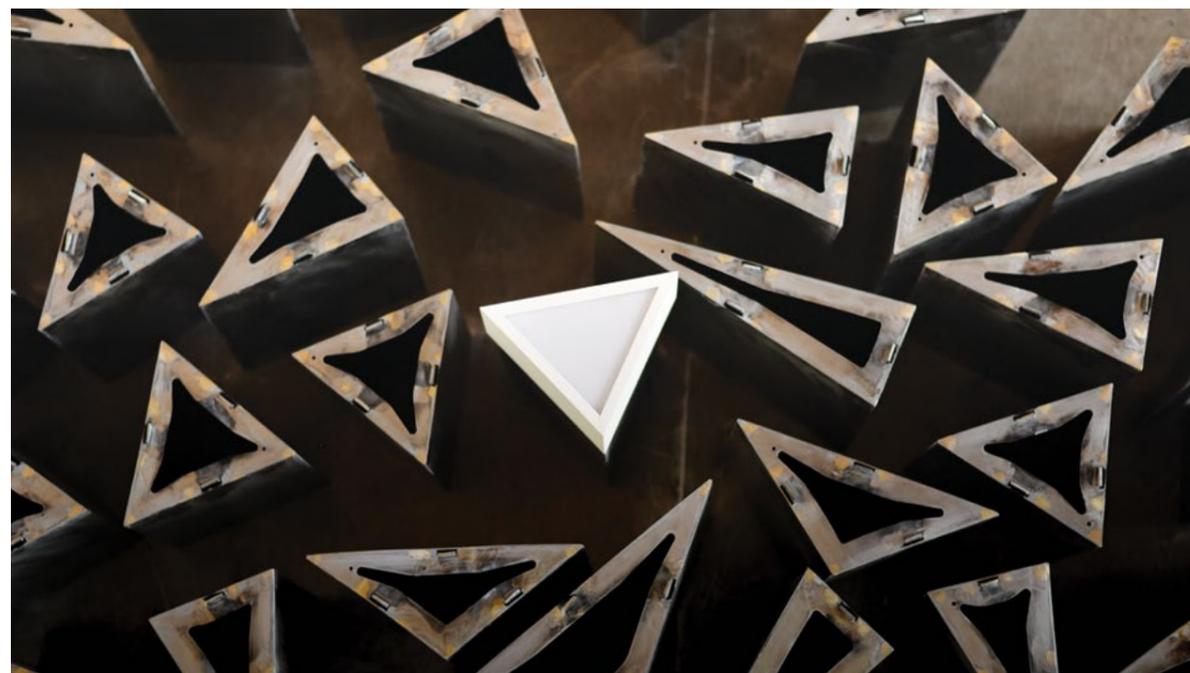

Sometimes the most various product portfolio is unable to meet the projects needs. In NEXO, customized product is accepted as a culture. Our experienced engineers and experts attempt to provide specific solutions for product development. Most of the products in this catalog are the result of this approach.



ARCHITECTURAL LIGHTING
INNOVATION



Mika Twin Towers



Watch Video



PREMIUM MATERIALS

NEXO brass products, crafted from premium-quality brass, offer more than just visual elegance—they bring lasting durability with excellent resistance to moisture, rust, and corrosion. With precise design, artistic finishing, and a wide selection of professional platings and finishes, these products are a perfect choice for luxury, classic, and modern interiors.



[more information](#)



PREMIUM COATING

Plating on brass, especially for items like brass luminaires, is a process designed to enhance durability, aesthetic appeal, and corrosion resistance. This technique typically involves coating the brass surface with more durable metals such as chrome, nickel, or tin, which not only provide a shiny and attractive finish but also protect against oxidation and natural discoloration. At NEXO, three main types of plating are offered: gold, rose gold, and silver, each providing a unique and distinctive appearance to the brass luminaires bodies while increasing their durability and enhancing the product's beauty.



UNIQUE

"Unique" adjustable-angle spot light, with 60mm and 90mm diameters, available in surface-mounted and track-mounted installations.



SILVA

"Silva" decorative pendant light, with 40mm, 60mm, and 90mm diameters, and customizable length.



PINTO

"Pinto" multi-downlight, with customizable layout and length



SILVA

"Silva" decorative pendant light, with 40mm, 60mm, and 90mm diameters, and customizable length.




NEXO

"Nexo" semi-recessed light, with a 70mm diameter



more information



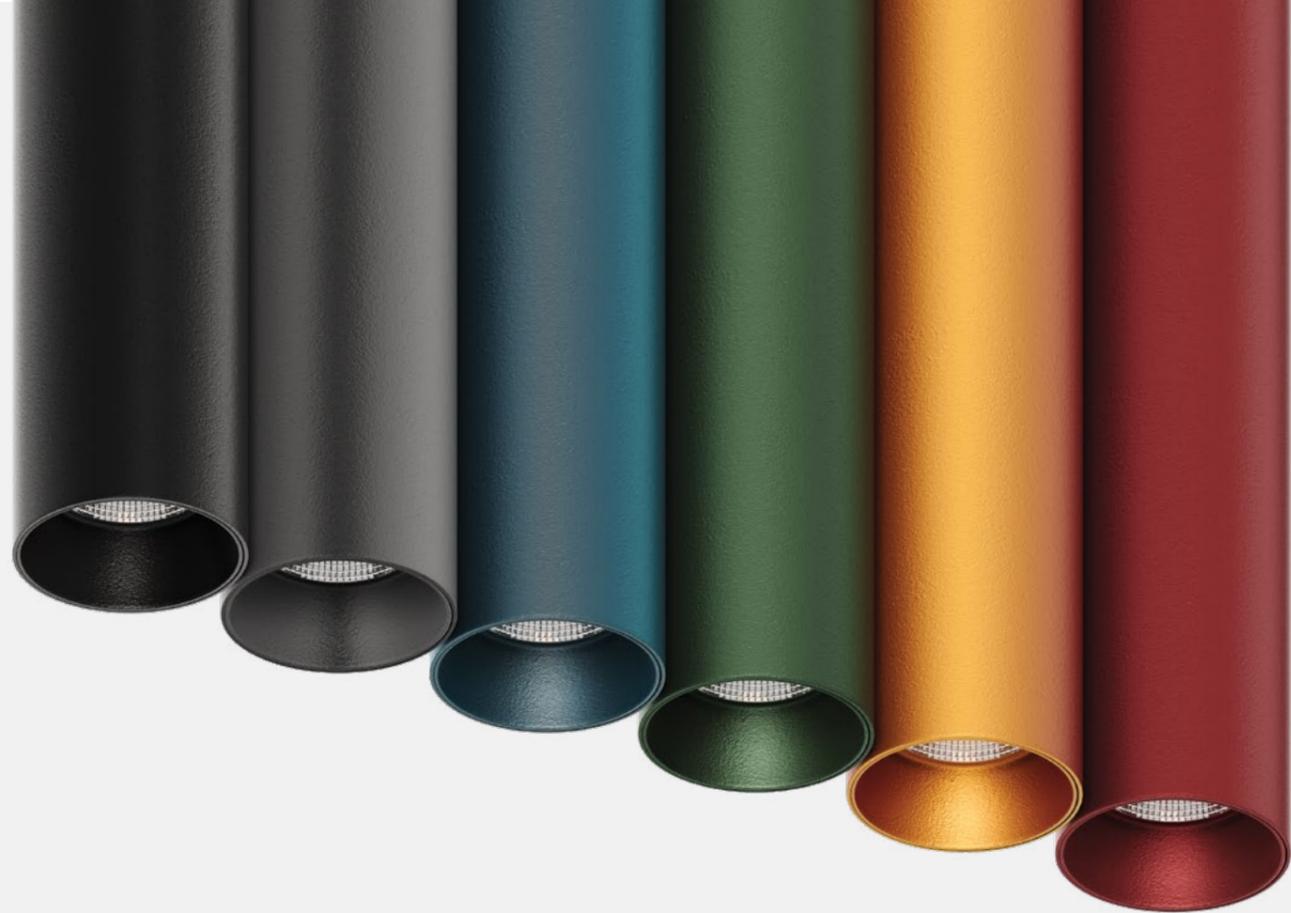

| COLOR RANGE

Electrostatic powder coating on every NEXO product by specifying RAL color code


more information





PRISMATIC DIFFUSERS

NEXO'S new lighting products, featuring advanced designs, are available with micro-prismatic diffusers equipped with Jung-Becker technology from Germany. This technology effectively controls glare and achieves a UGR<19 rating, providing uniform, soft lighting without causing visual discomfort. Additionally, diffuser luminaires with these features can be offered in a variety of models and sizes to suit the needs of different projects.

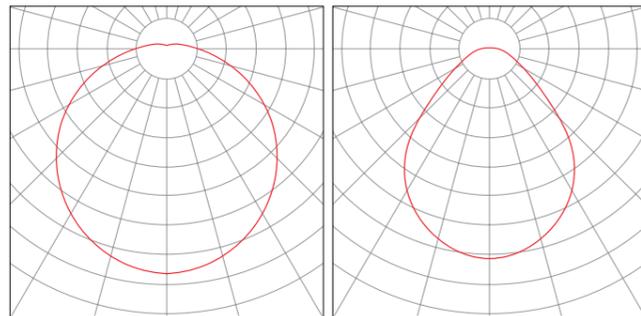

more information



Covering frame

Microprismatic optical sheet

Opal optical diffusion film

Luminaire housing

HIGHLIGHT

NEXO PROJECT SERVICES




0 THE BEGINNING

NEXO Highlight Unit focuses on delivering innovative lighting solutions that enhance visual quality, create aesthetically pleasing environments, and precisely meet user needs. All activities are carried out with consideration for lighting requirements, environmental factors, and space functionality. The unit's specialists identify project needs, technical requirements, and lighting standards to select the most suitable design approach. Using professional software such as Dialux, they perform lighting calculations and determine appropriate light sources. When necessary, custom product design and development are carried out in collaboration with technical and R&D teams.

The unit's workflow includes:

- 1- Communicating with the project team and receiving initial information, including plans, 3D files, and other technical details
- 2- Identifying the project's lighting requirements based on space type and lighting standards
- 3- Developing the lighting design using specialized software
- 4- Selecting and introducing appropriate lighting sources and equipment for the project
- 5- Collaborating with the R&D department to design and custom-produce luminaires if required by the project

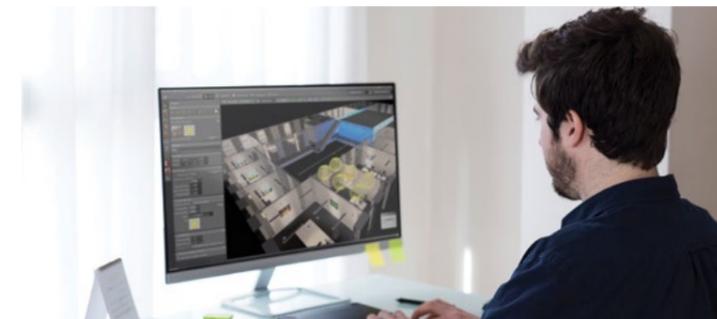

more information

100
THE END



HUMAN CENTRIC LIGHTING

VIRA HCL SYSTEM



WHERE THE HCL SYSTEM CAN BE APPLIED






HUMAN CENTRIC LIGHTING

LIGHT AS A SOURCE OF WELLNESS

The light changes of the Human-centric lighting system are equal to the natural light changes of the environment in which the building is located. By changing the light flux and color and adapting the artificial light to the season and the time of the day, we can reproduce the natural rhythms in interior spaces and have several benefits for human.

WHERE THE HCL SYSTEM CAN BE APPLIED


It is a state-of-the-art LED technology that allows to adjust the color Temperatures along the Planck curve from 2.700K to 6.500K, that is, from warm to cold light. Given its relevant benefits, such technology can be applied to locations including educational establishments (schools, institutes), commercial premises (shops, offices), factories, health areas (hospitals and nursing homes), residencies, as well as specific geographical places or spaces lacking natural light.

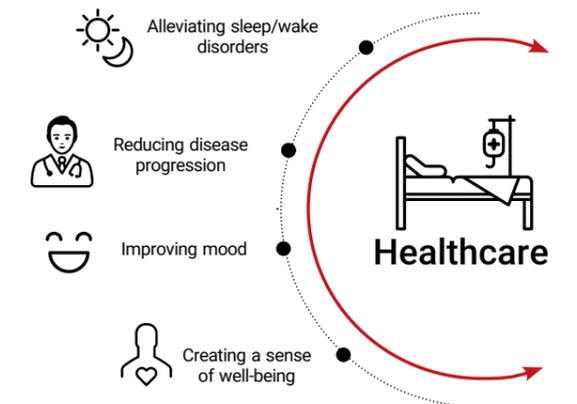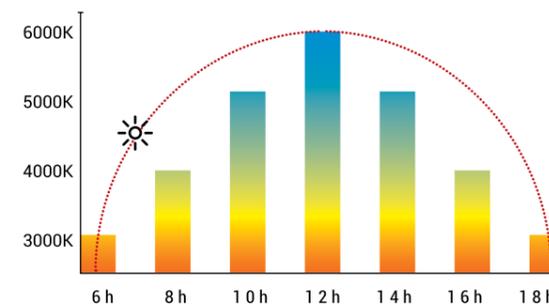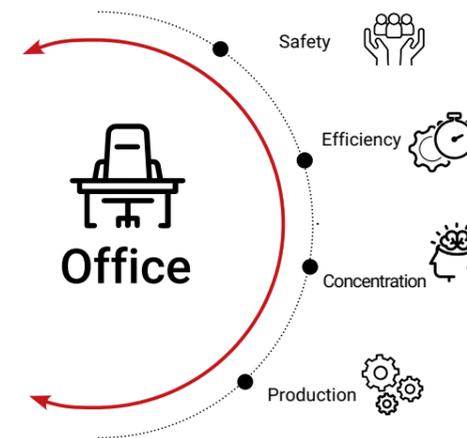


more information




CONTROL SOLUTIONS

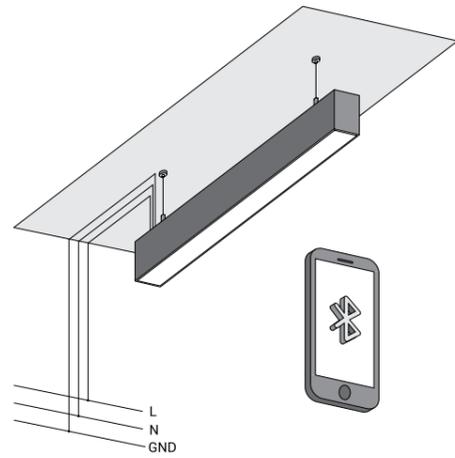


1. Easily adjust dimming from 1 to 100 by pushing a Push button, which uses only a wire string and no interface devices

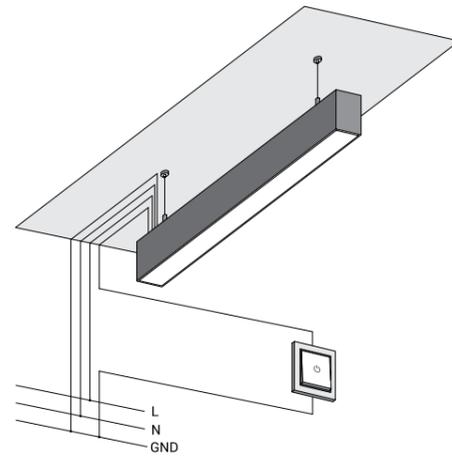

2. Easily dim, group, and structure the environment lighting using a smartphone or lights powered by Nooraneh VIRA Wireless

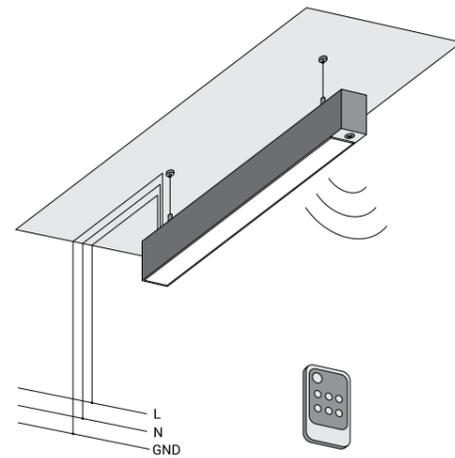

3. Adjust the light level with a remote control using an all-in-one sensor integrated in dimmable lights; then illumination is automatically adjusted according to the available daylight.

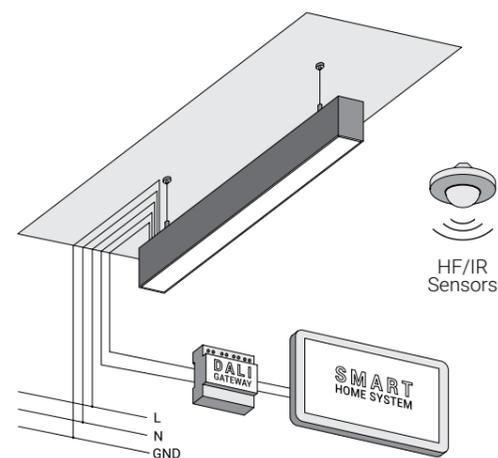

4. Easily connect Nooraneh DALI / DALI-2 lights to smart building systems using a gateway module in spaces adopting world standard communication protocols for smart home and building control such as KNX.

COLOR CONTROL

Dim to Warm




3000 k ————— 1800 k

Warmer and Warmer

These lights act like incandescent lamps; light source gets dimmer and becomes warmer, creating an agreeable environment.

RGBW

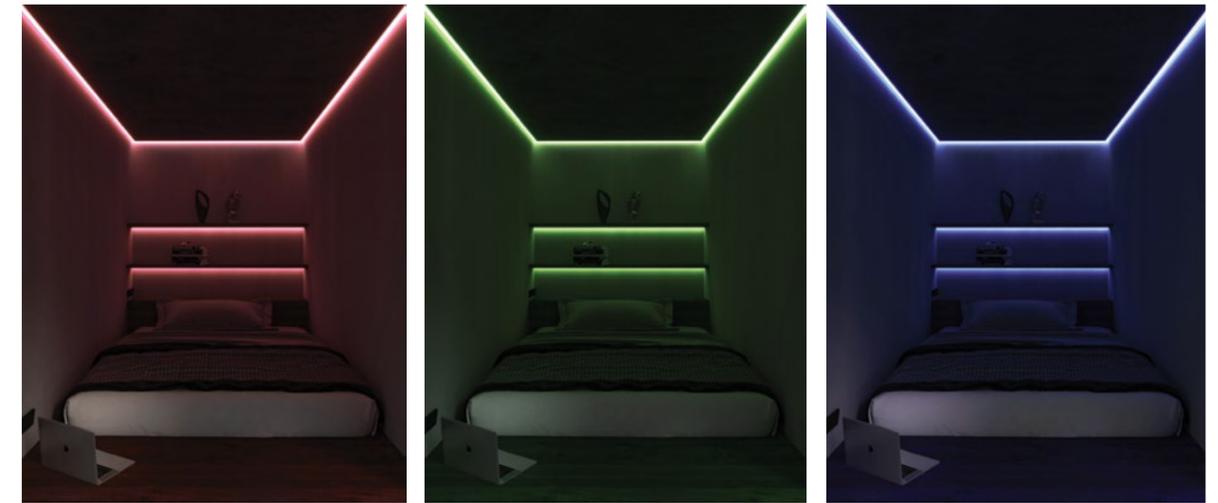

Color Play

A consistent control of the light color and creating different colored scenes by controlling the lights with a smartphone or an RGB touchpad.

CONTROL SYSTEMS



The DALI Light Control System

The digital addressable lighting interface (DALI) is a major lighting control platform with many features, including zoning, grouping, and implementing lighting scenarios and modifying them at any time for a maximum of 64 members (128 members in DALI-2). This system is implemented by 1. wiring the control system between components and lights, and 2. using a combination of wireless and wired systems for component and light communication. This protocol's unique features include its ability to receive data feedback and diagnose lights. Lights supporting the DALI protocol can be used in automation systems like KNX and converter components (gateways).



The KNX Automation System and Smart Home


KNX is a common automation and smart home system for controlling lighting via auxiliary protocols. This system controls non-digital light with phase-cut dimming modules and 0-10V dimmers. To control digital lights and use special features, lights supporting the DALI protocol can be installed using applicable converters at no additional dimmer expenses.



Rotary switches for dimming and color change



Optional touch panels for light dimming, color change, grouping, and implementing scenarios

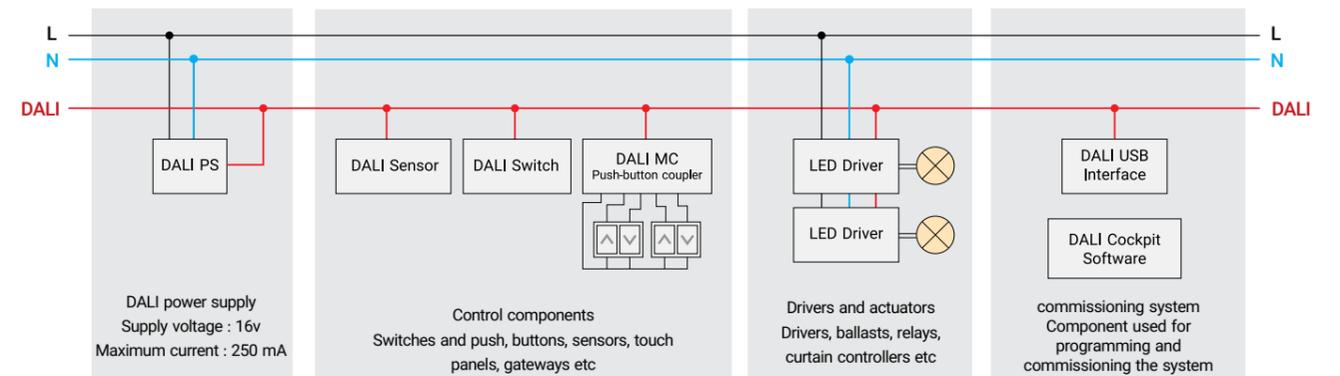

TUNABLE WHITE



Harmony with Daily Routine

Adapting the light and illumination levels according to the available daylight to properly regulate the biological clock and match the surrounding with lighting sources.



3D OBJECT



To create a successful work, in addition to the right idea, you need strong tools for design and drawing to reach your ideal form. We felt the creation of a powerful tool in lighting design and started producing 3D files of all our products.

Access to 3D models that are fully compatible with existing products helps the designer to implement the project accurately.

Due to the expansion of the BIM modeling system in the construction industry, NEXO company has specially designed BIM files for its lighting products.



nexolighting.com/3d-files

By referring to the page related to each product and scanning the available QR code, you can access and download the 3D files for each luminaire.

DIGITAL TWIN





3D object



Render




Real photo

All 3D files are modeled with the highest detail and have the greatest possible similarity to NEXO products. These files can be used in all architectural modeling softwares.



 <https://nexolighting.com/3d-files/>

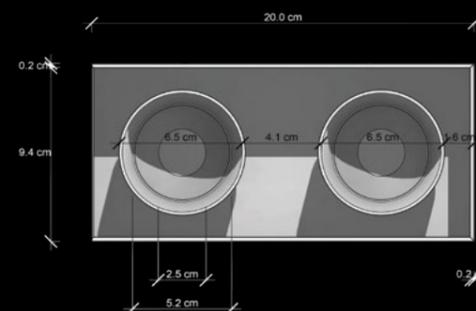

BIM objects, unlike normal 3D objects, in addition to the appearance, dimensions and size of each product, include information on architecture, installation, construction, and information related to the manufacturer of each object.

QUALITY OF COMPONENTS



Components

Components play a crucial role in lighting products' easy installation, safety, and performance. These components ensure the correct functioning of the product and influence the overall quality. Therefore, NEXO selects components with the highest quality and performance standards from the most reputable European manufacturers to ensure that our products always deliver the best performance.



INSTALLATION INSTRUCTION


<https://nexolighting.com/installation>
more information



Watch
Video

SELE
CTED
PROJ
ECTS

<https://nexolighting.com/projects/>

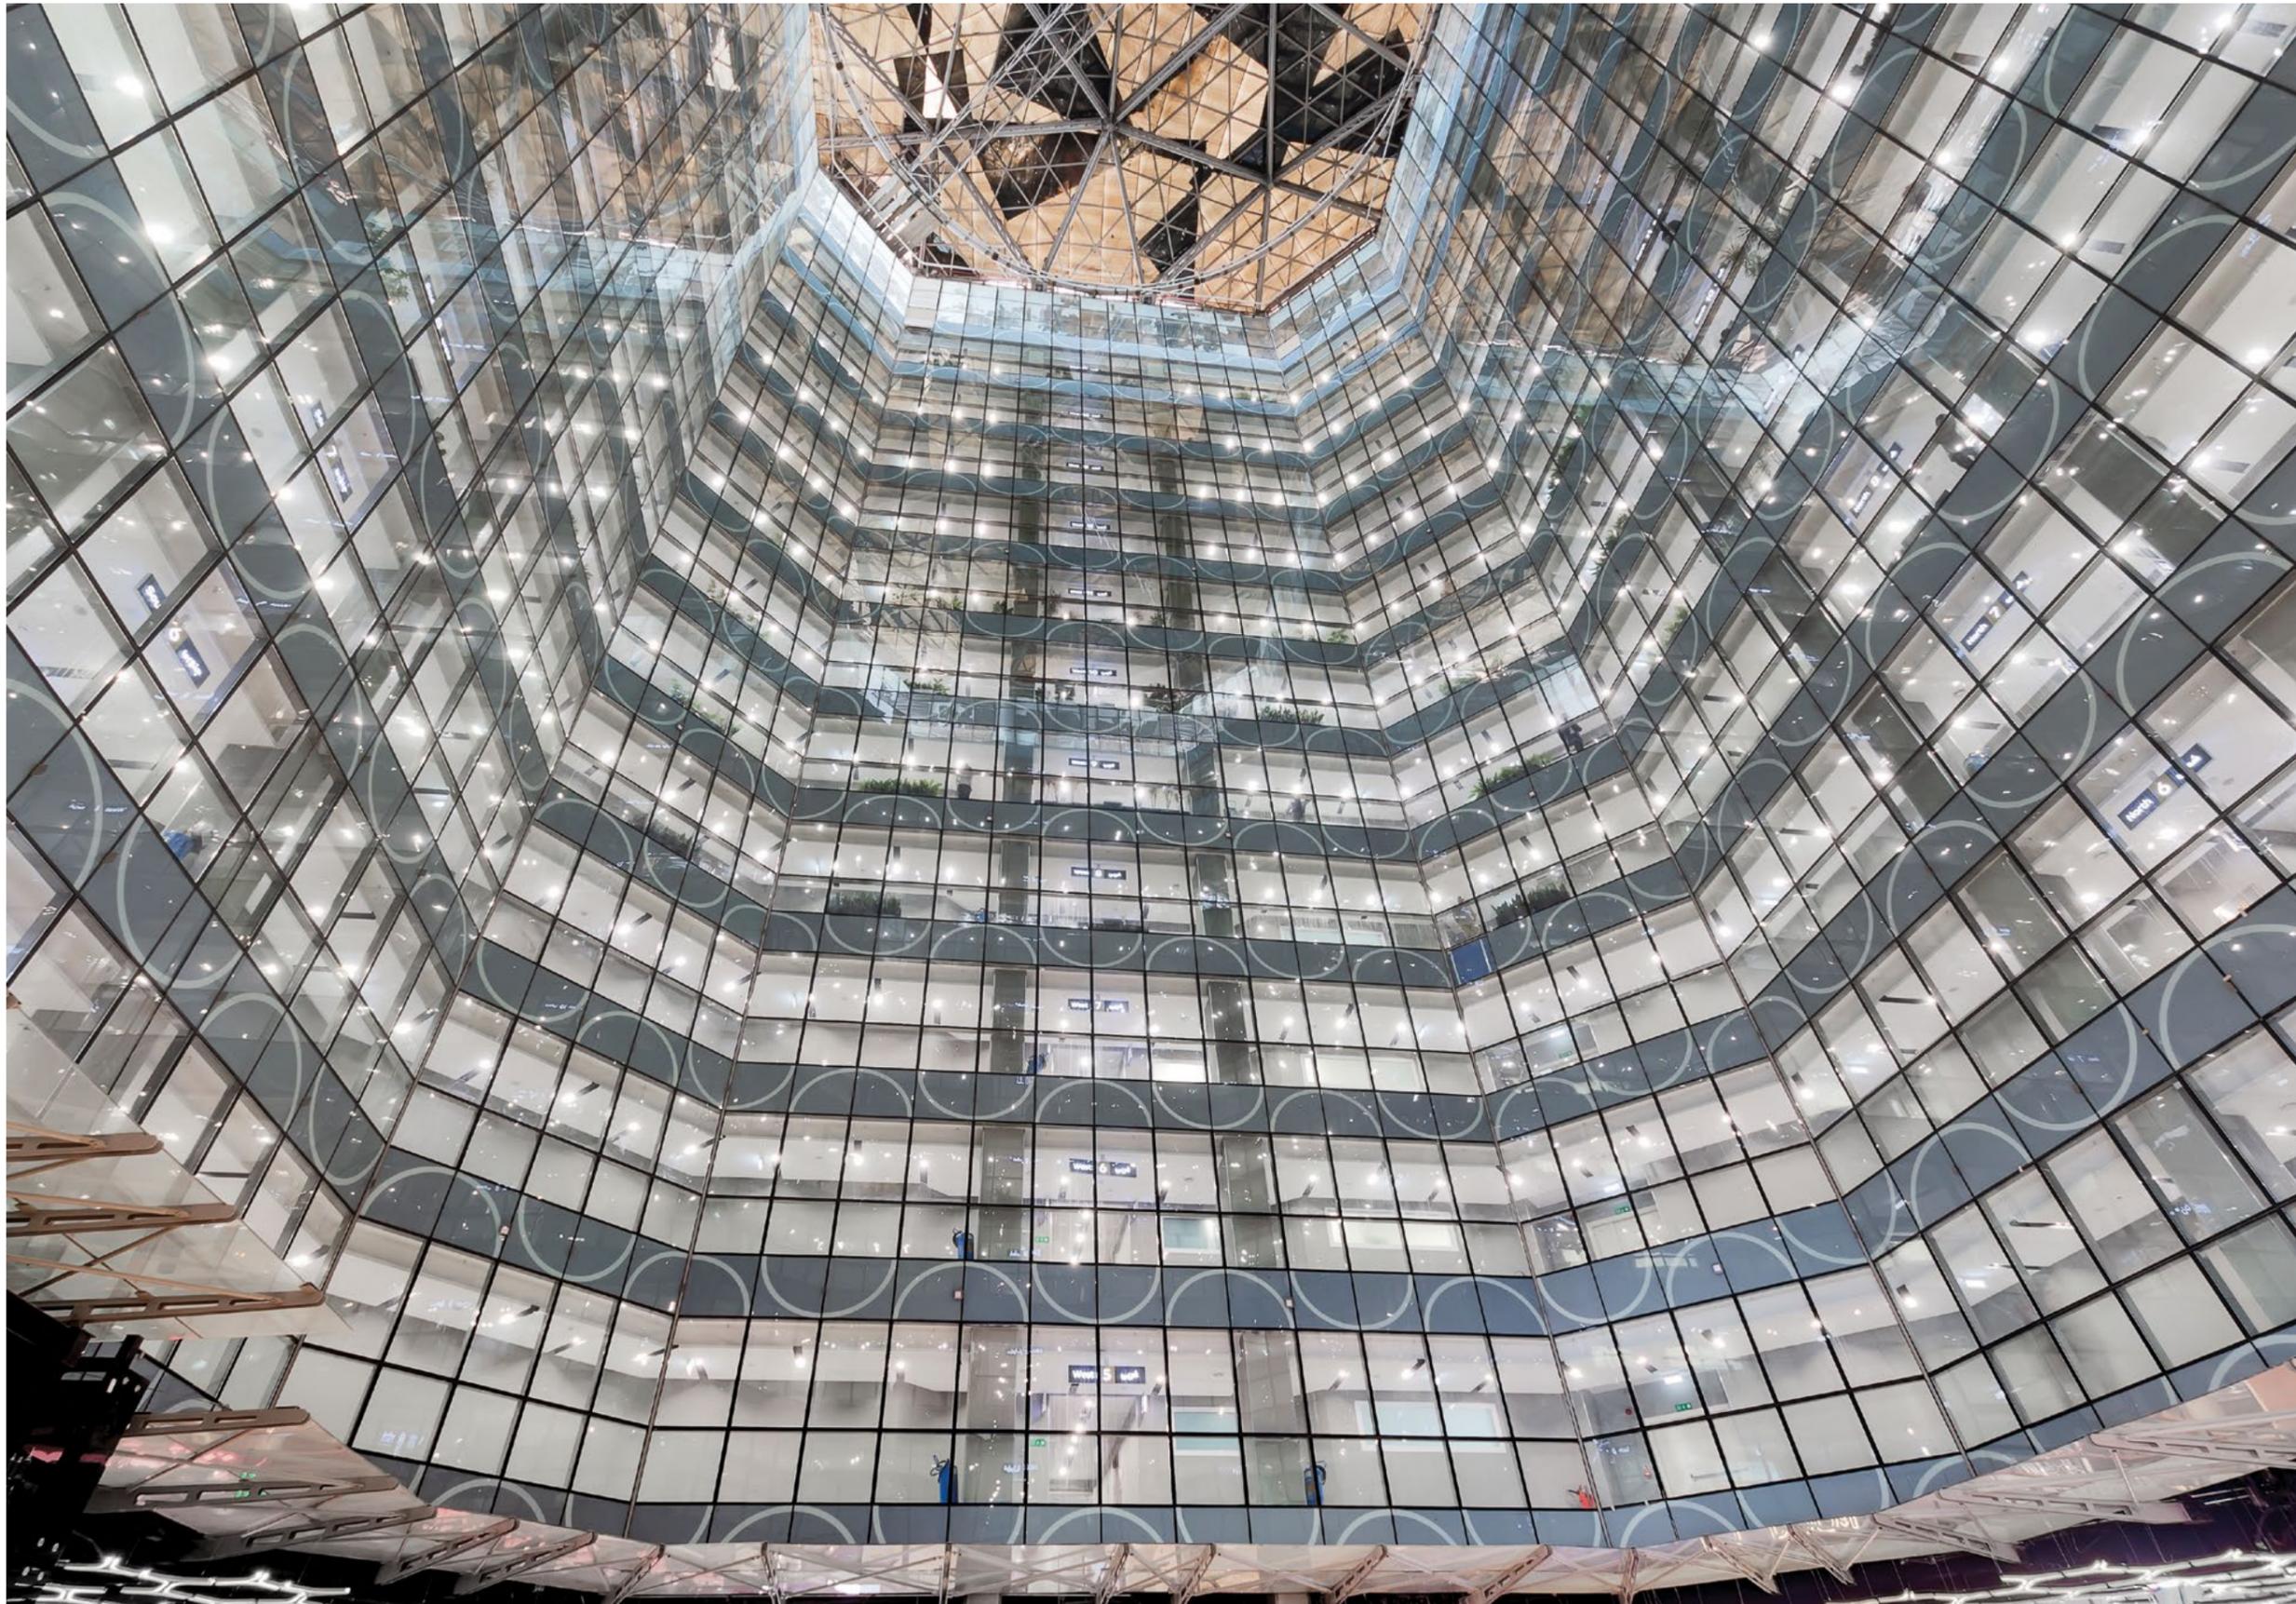

HAMILA

Commercial

The Hamila Commercial and Administrative Complex, with an approximate area of 150,000 square meters across 27 floors, hosts a complete range of businesses and professions. This complex includes commercial units, office spaces, cultural facilities, a hypermarket, a modern amusement park, a food court, and a coffee shop, catering to all the essential needs of visitors. The interior lighting of the Hamila Complex is done using Eco recessed and surface-mounted downlights of various sizes, Linno lights family, and linear lights, which not only provide general illumination but also enhance its beauty.



more information





No.23 Residential
Building Parsa redefines a new interpretation of modern living for its residents, an interpretation that carefully envisions the future while drawing inspiration from its surroundings. For the living area lighting, the Multi Track system with magnetic fixtures has been used, allowing for adjustable and flexible lighting. Above the dining table, a Glory system has been used, creating a luxurious and elegant ambiance. Additionally, in the lobby, a collection of Silva cylindrical pendant lights has been utilized, adding a striking visual appeal to the space.




more information  




Kish International Airport

Transportation

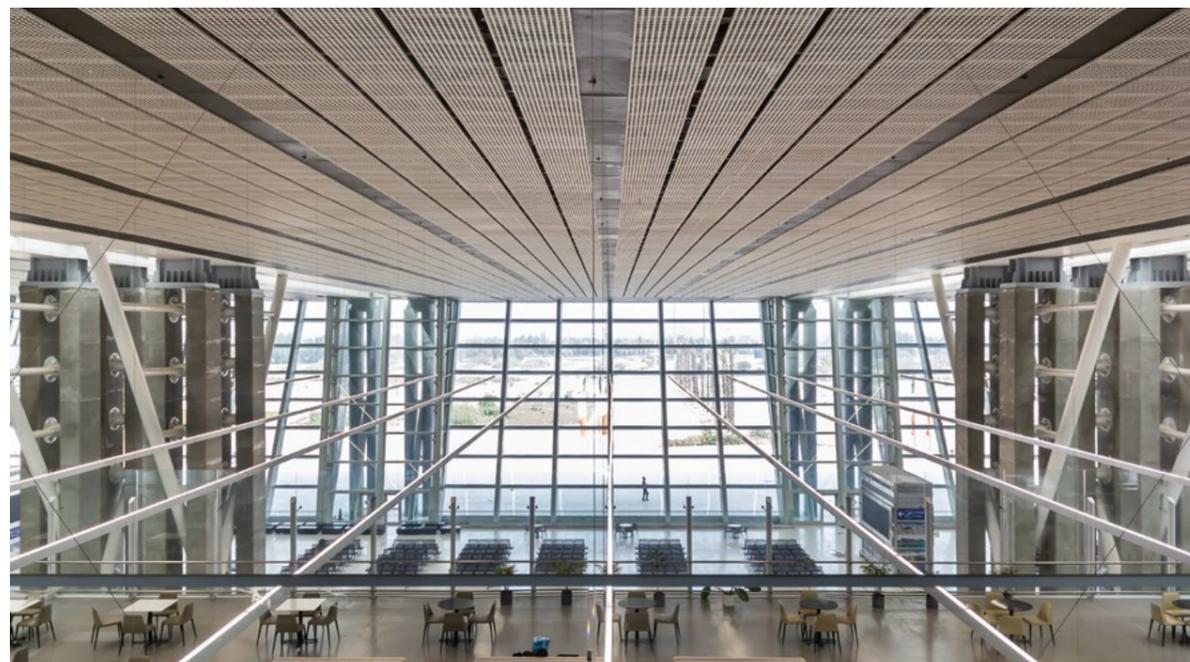

Lighting system for the Kish international airport's new terminal was designed using Line Up&Down DALI linear luminaires. Continuous lines up to 70m, using luminaire housing as for the trunking, separate controllability of direct/indirect light distribution and using anti corrosion components are some of the key features those were met in this project.

more information  

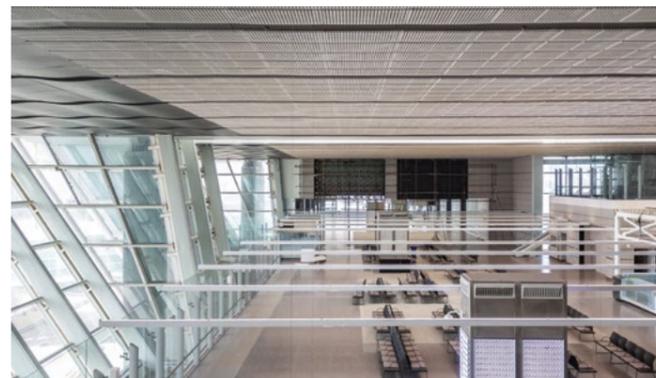



PAYA

Office

wealth management project is a renovation of an office building from the 70s located on Vezara Street. The architect of the project has used the original Building Structure without any changes. Except concrete Structure and the restoration of its surfaces, most of the renovation changes are in white, and what was and is inside and outside can be traced. The facade of the building and the corridor behind it is the border between the building and the city and is constantly changing. During the day it is solid and impenetrable and at night it is a semi-transparent source that transmits light and illuminates the surroundings and reveals the inside, and can be folded at any time to connect the inside and the outside. In the lighting of this project, pendant linear lights, in addition to completing the linear geometry of the ceilings, provide general light of the space.



more information





DIDAR Office




A wide range of NEXO products have been used in Didar office, inspired by a dot-line pattern including "Canal" and "Multi Track System" in addition to "Manna" and "Echo plus" downlights.



Watch Video more information

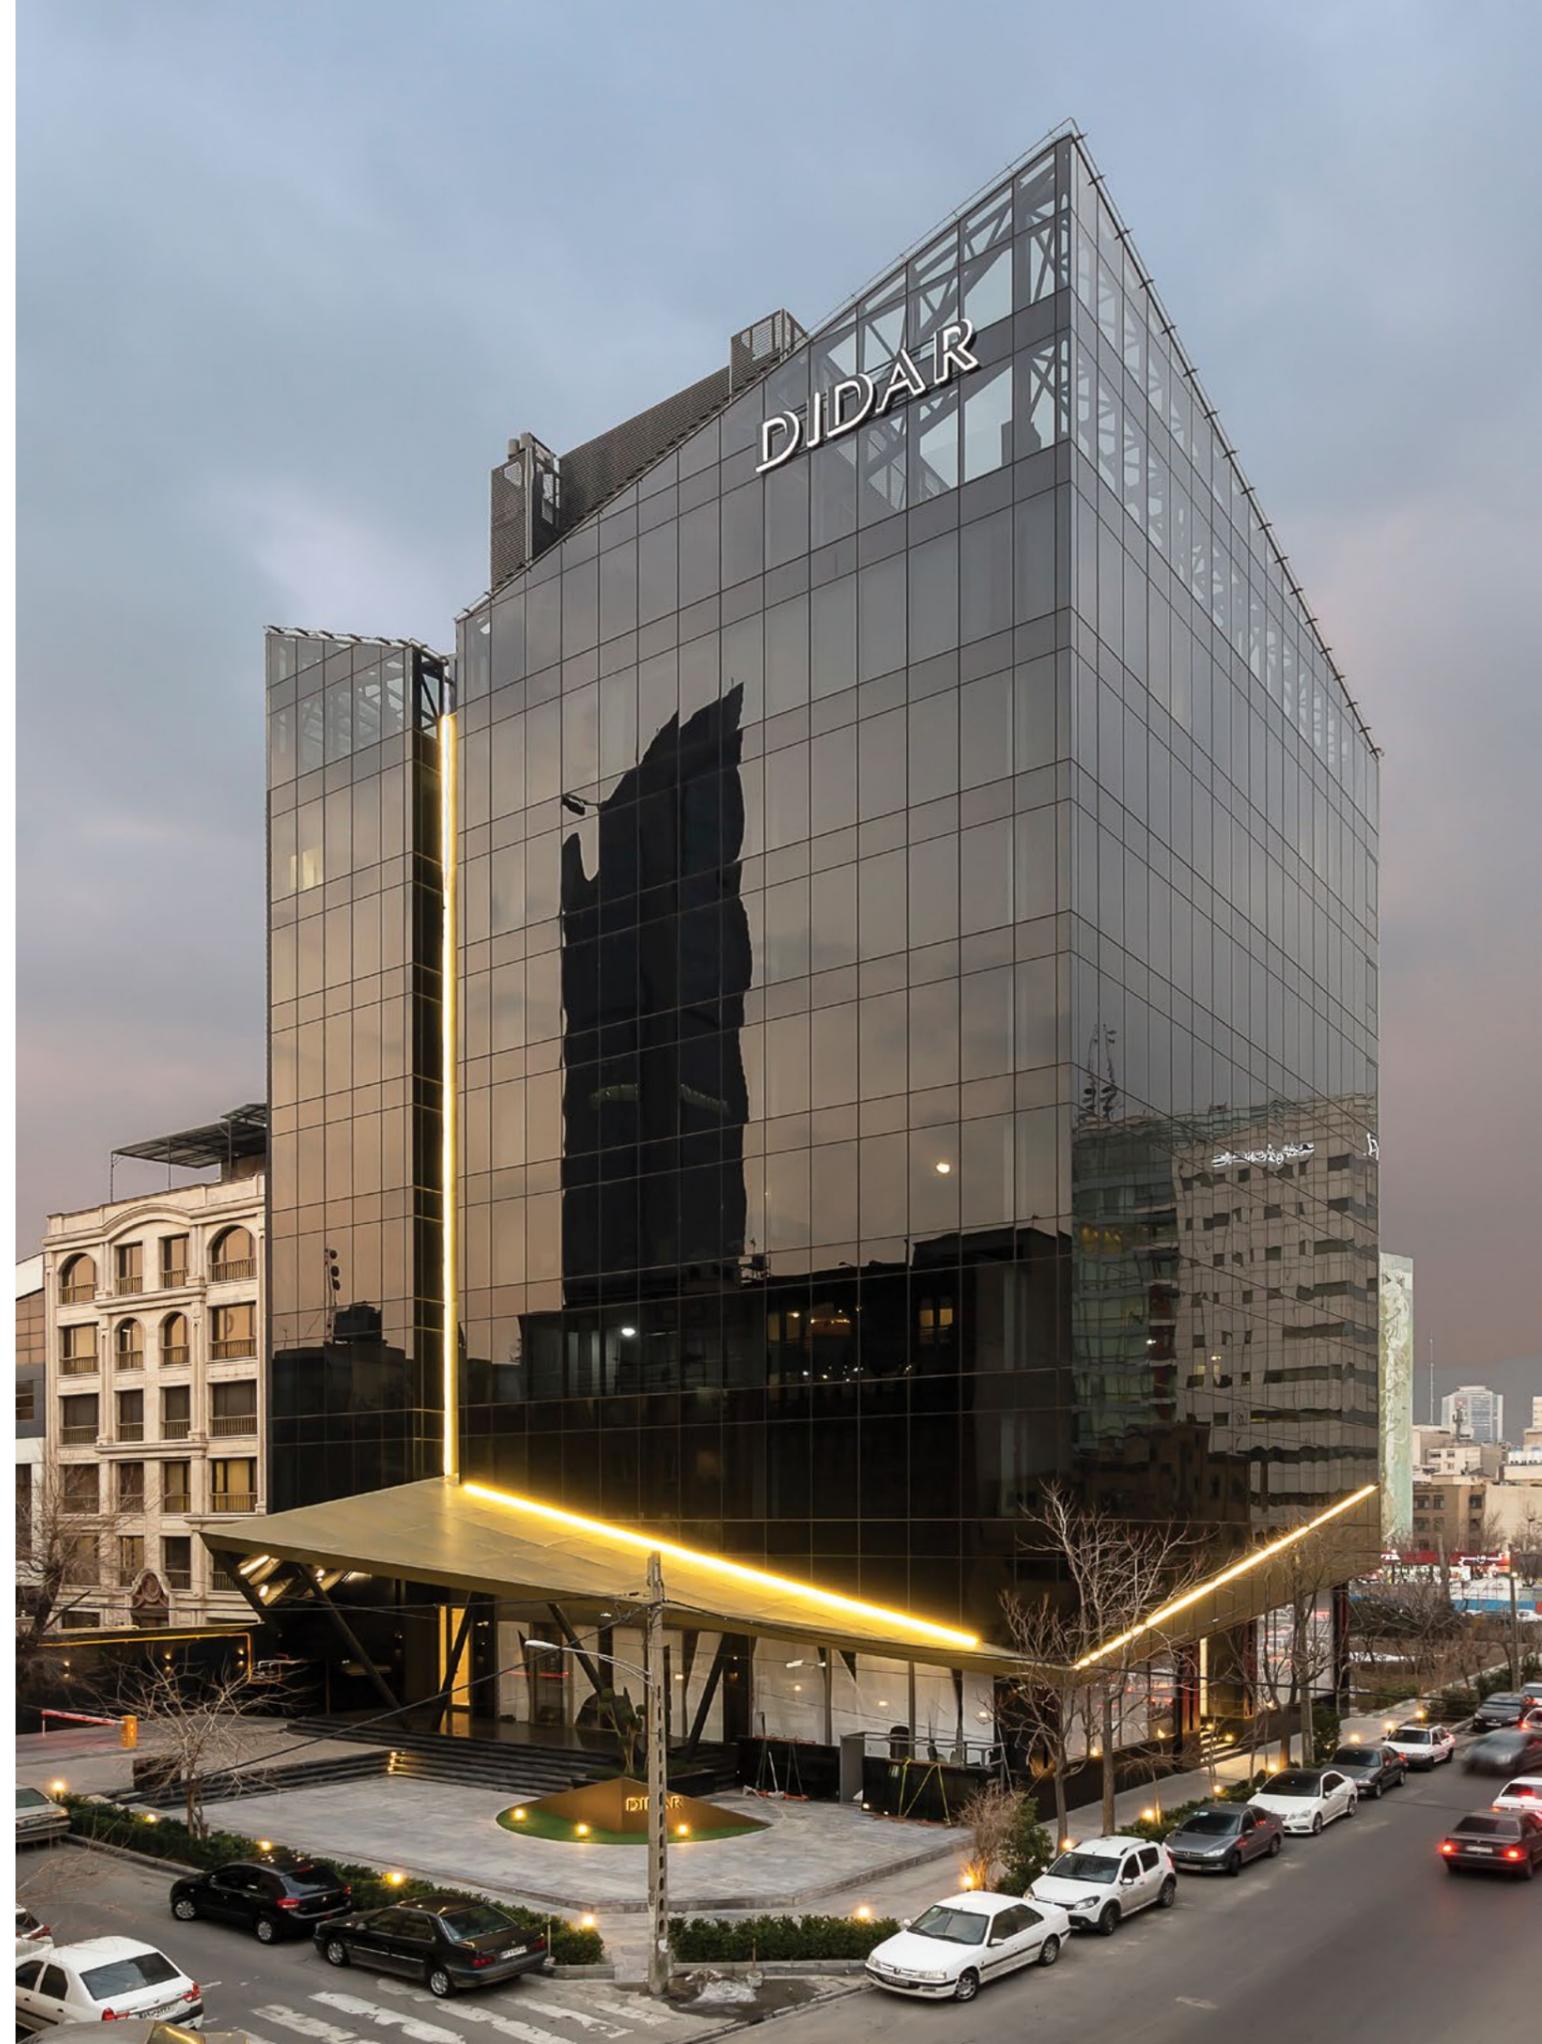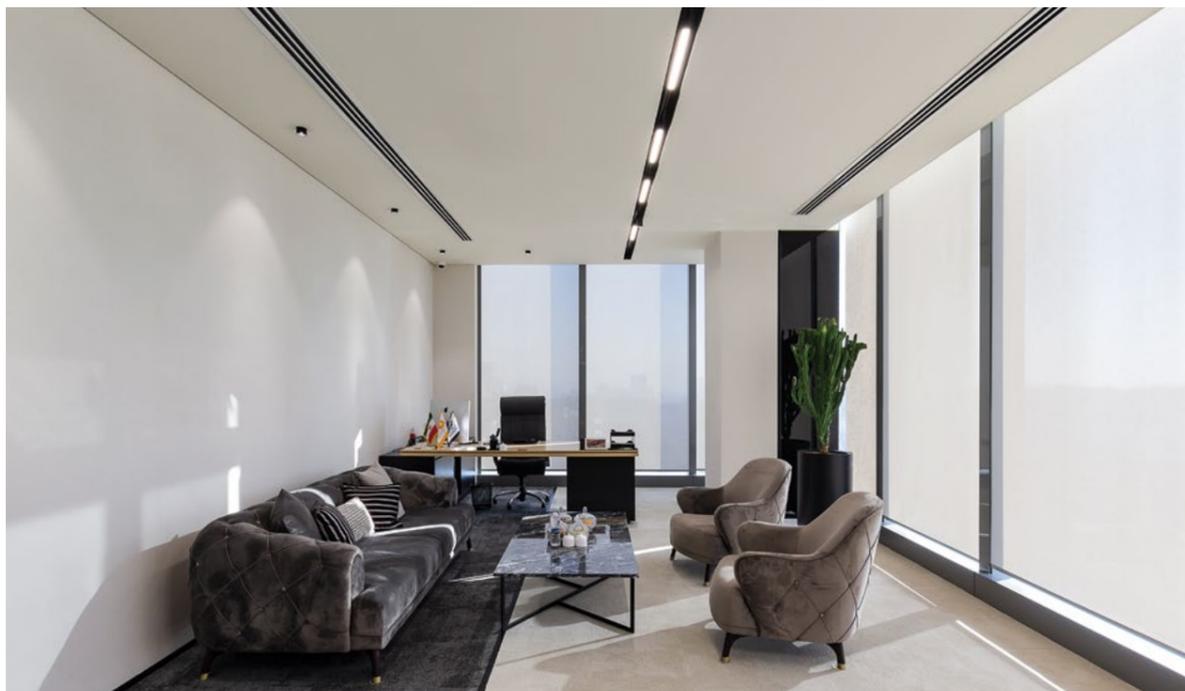

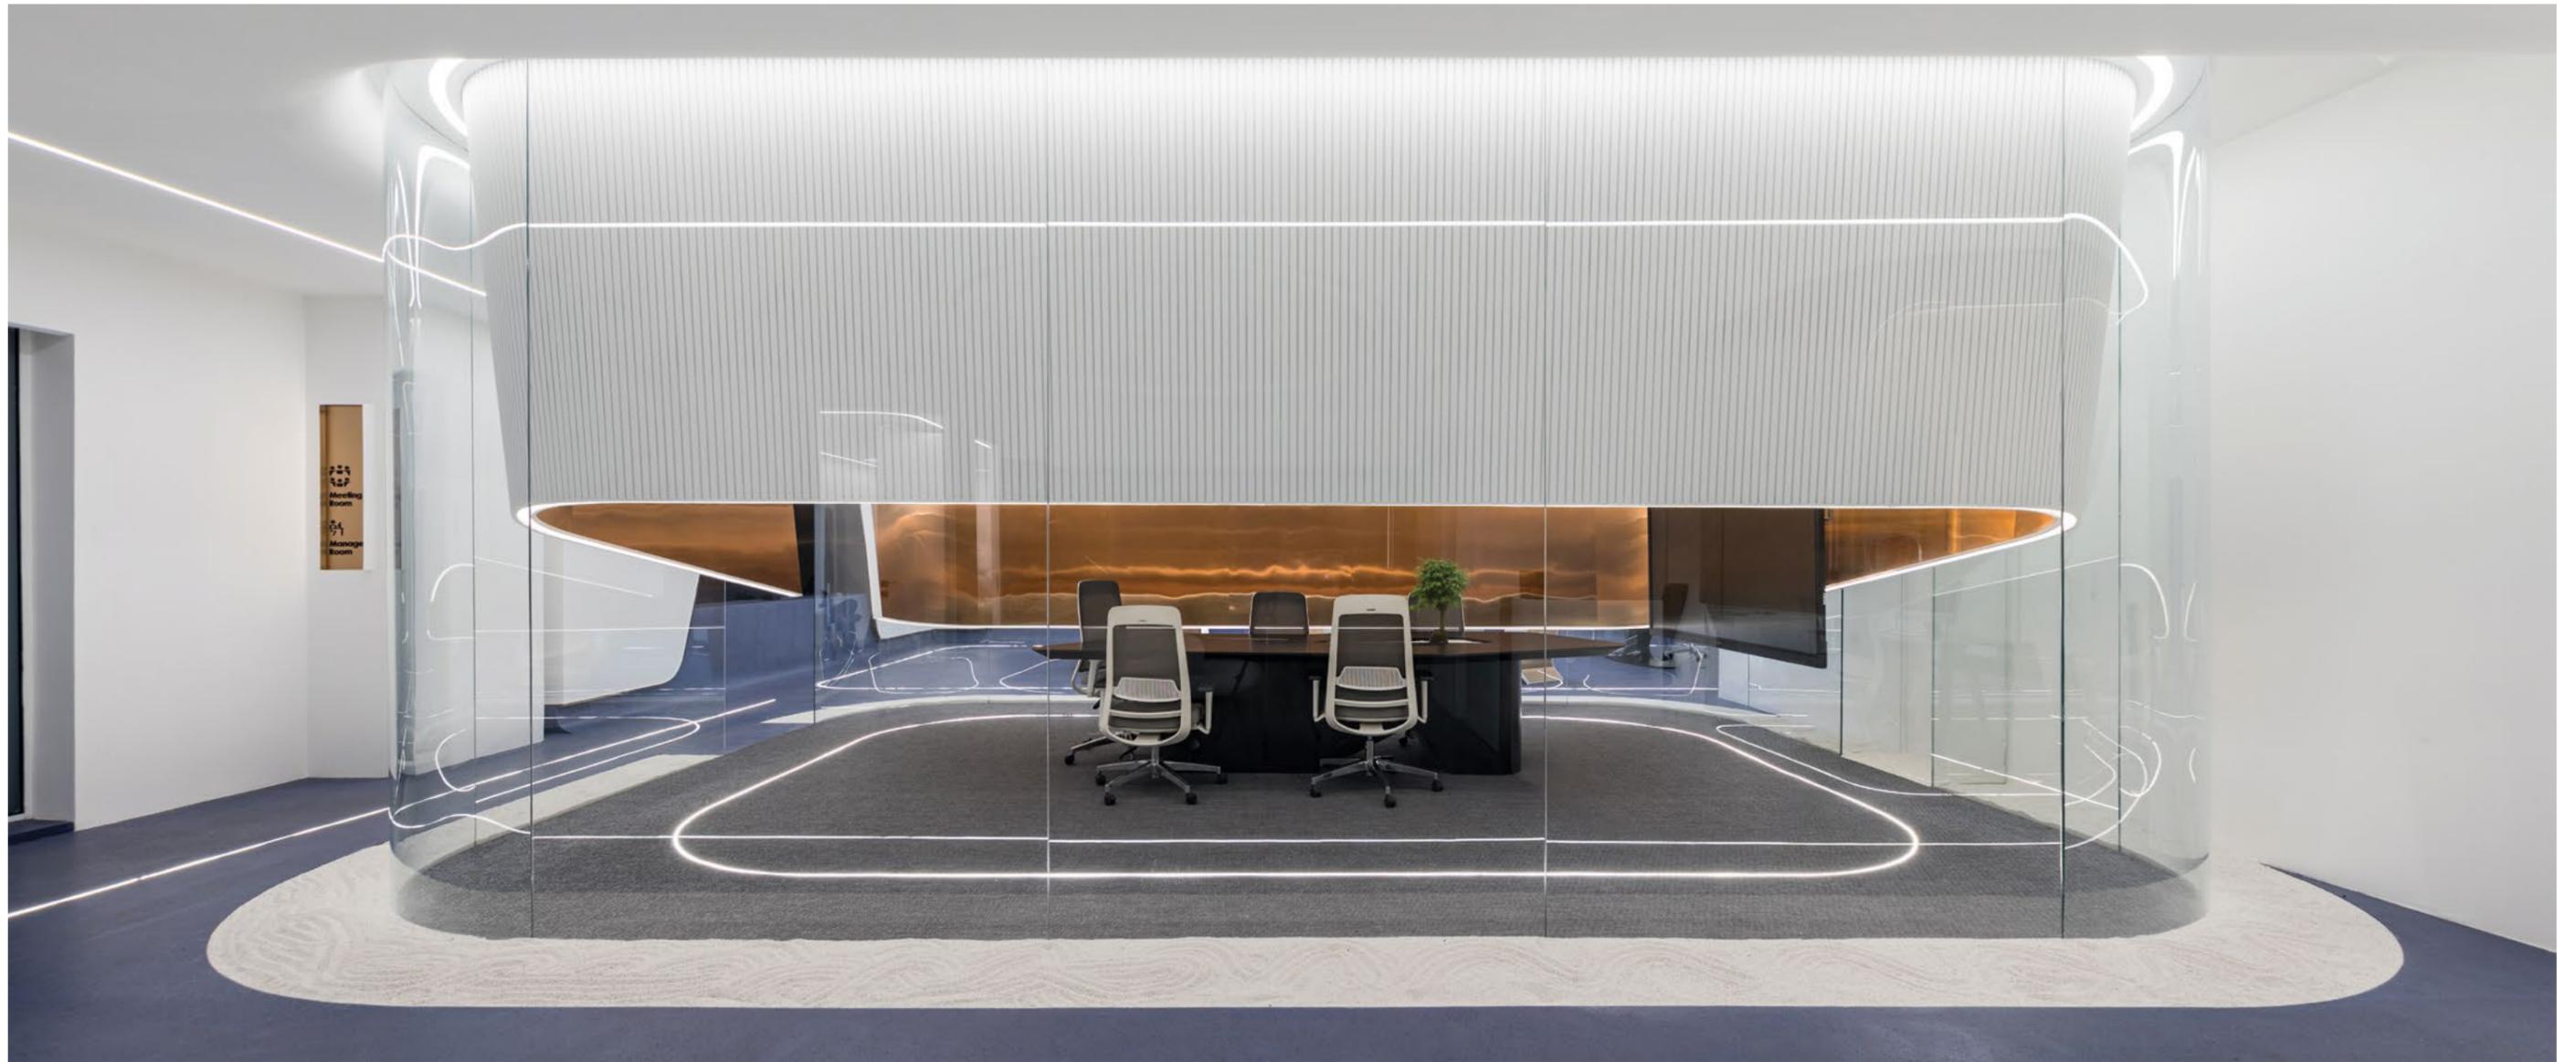

Sapramin

Office

The manifestation of modern and futuristic design language in curved lines is one of the main features of the Sapramin office project. The use of curved recessed linear Line lights, combined with Lino family, uniquely evokes this characteristic.



more information

Double-Sided House Residential

The project's strategy involves designing a deep shell as an organizing structure. This deep shell embraces the exterior; it acts as a mediator that, through its voids, brings the external landscape into the interior space. It creates a balance between sheltered boxes and the naked environment, between visibility and concealment. For the interior lighting of the project, Trimo darklight luminaires were used to provide general lighting. Additionally, the NEXO Multi Track system, including Unique and Lenza luminaires, was employed to create both accent and ambient lighting. These magnetic lights, with their easy repositioning and adjustability, allow for diverse lighting scenarios and high flexibility in designing and modifying the lighting of the space.



[more information](#)






The reconciliation between the city and its citizens is an undeniable necessity. Streets and urban pathways are not merely transit routes; they serve as a platform for life and interaction. Given the diminishing presence of this concept in modern cities and the prevalence of citizens who use vehicles solely to reach their destinations quickly, this project focuses on strengthening the connection between the city (the passage), the café, and the citizen (the passerby). The Saedinia Café project has been executed with architectural design by Mehraasa Chamani, and its lighting has been provided using NEXO products. In designing and implementing the lighting for this space, sources have been utilized that not only create a healthy lighting experience but also effectively convey the intended ambiance to individuals.



more information

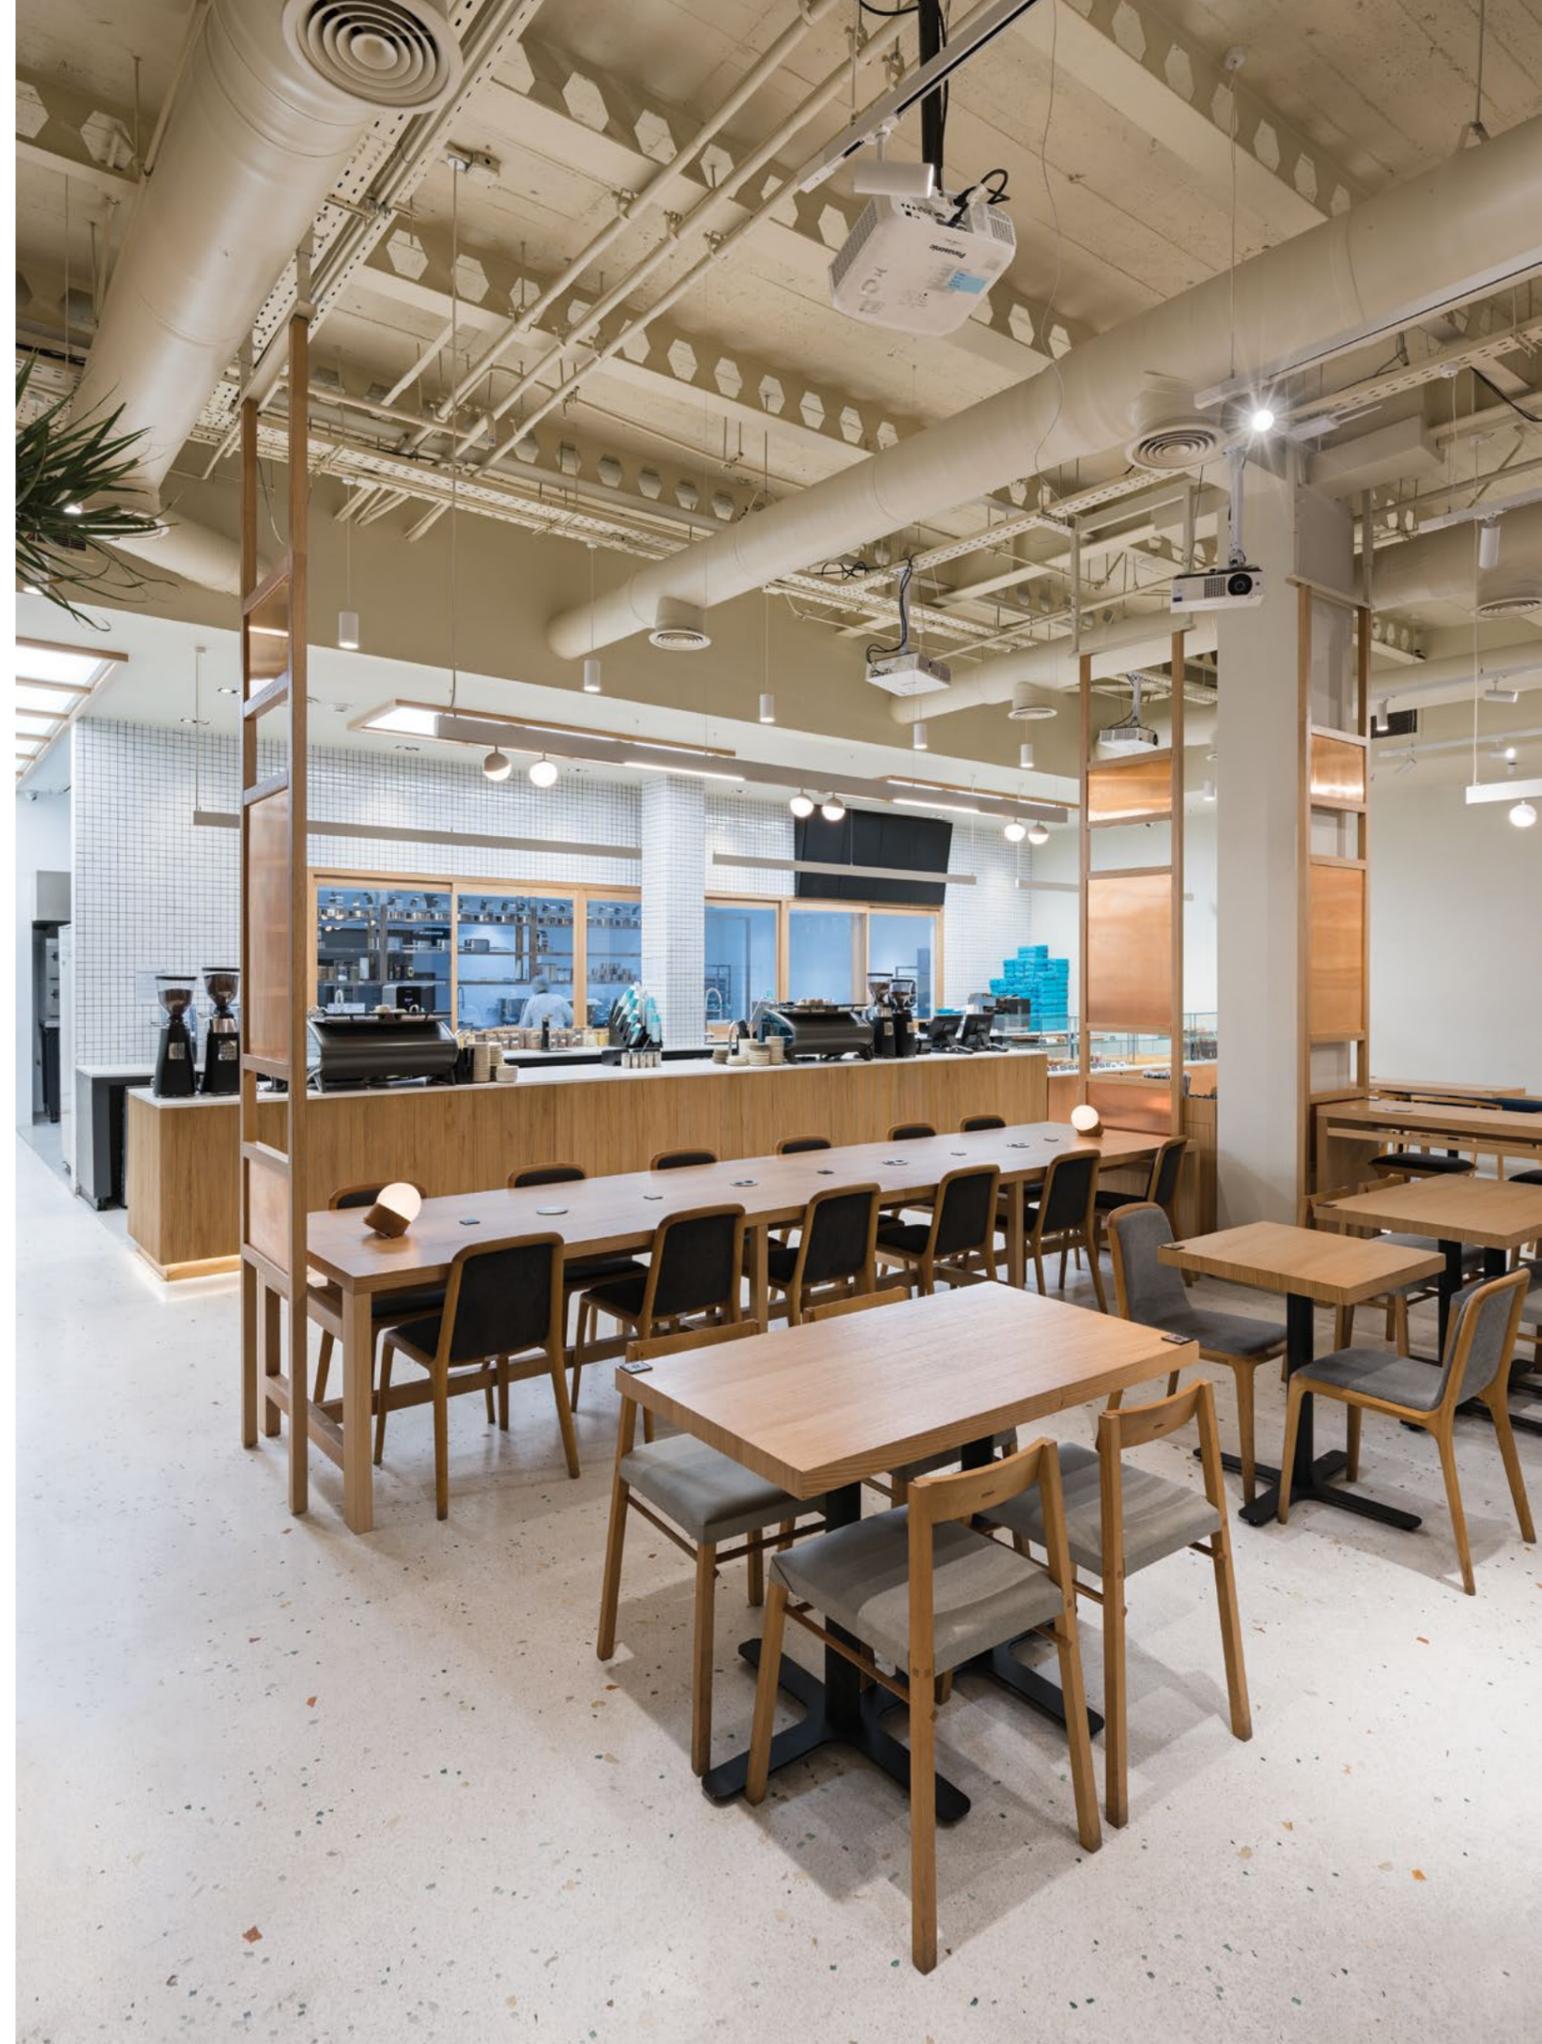



TORRENTE

Retail & Shop

Considering the importance of accent lighting in store spaces and the emphasis on aesthetics, Silva luminaires were used as both surface-mounted and pendant fixtures in the Torrette Perfume Store. Additionally, Line Pendant lights were used to provide general illumination for the store's central table.



more information





acada
Commercial & Official

Acada Complex, was constructed in 2011, and its office units commenced operations in the early days. The commercial section underwent a redesign in 2024 by the Mad Architecture firm, transforming from a general shopping center into a specialized children's department store.

One of the challenges of this redesign was converting the small commercial spaces into a unified and continuous space. Given the limited possibilities for significant changes to the floor and walls, the designer focused on the ceiling and employed linear lighting to connect the various retail sections. This continuity of linear lights conveys a sense of spatial unity to the users of the center.



more information




Dastas Retail

The Bread and Coffee Shop project represents a harmonious coexistence between tradition and modernity, as evidenced by the use of linear lights and the Glory pendant system with a rose gold finish.



more information

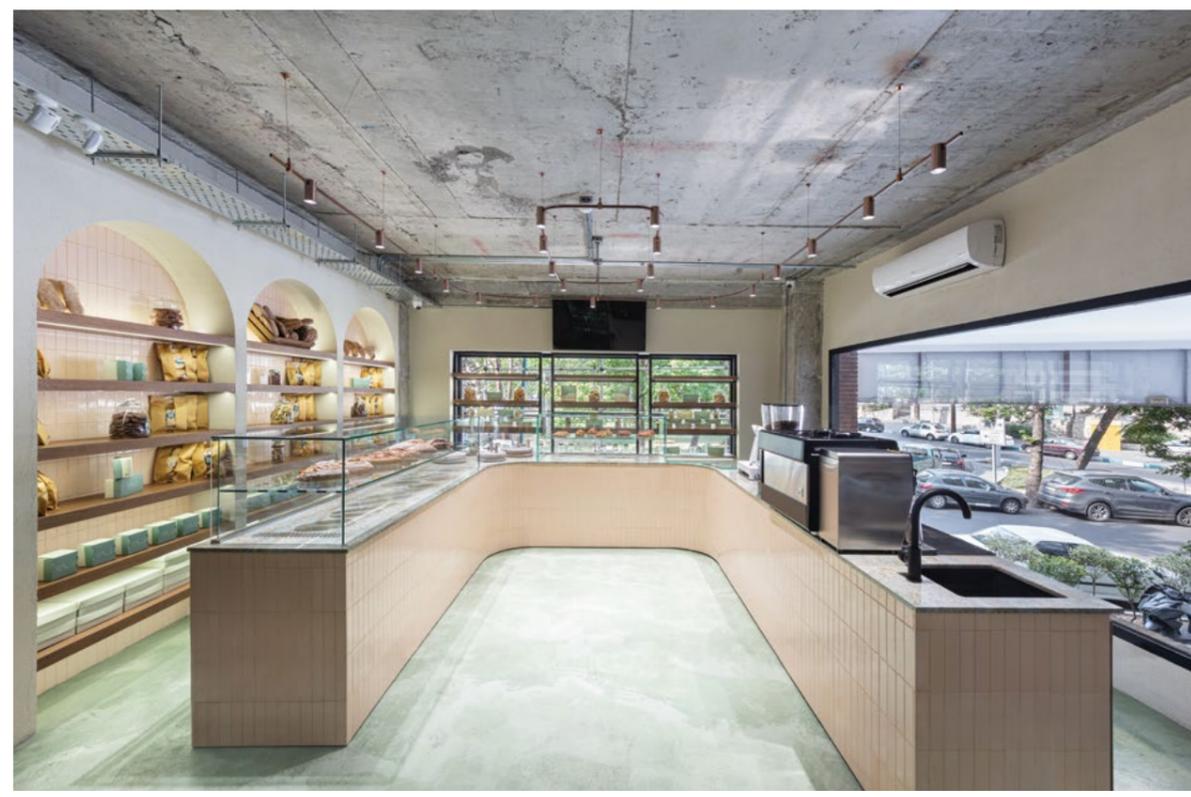

Winner of the 2022
**Architect
Prize**



VAST PLATFORM (HENRI CORBIN) Retail

This building is located in the street with the same name in three residential floors and five commercial units from the first Pahlavi period. Track mounted spotlights have been used in the lighting of this project, which are ideal for creating accent lighting, wallwashing and making pleasant lighting conditions for presentation.



Watch Video [more information](#)



Sapramin

Office

Soft lines and curved, organic forms define the furniture and lighting design of Sapramin's office project. Manufactured by NEXO, the lighting solutions were developed with a focus on manufacturability and customization, translating the architect's concepts and design intentions into tailored lighting products.




more information

No.7 Nastaran Residential

Proper arrangement of lighting elements in various spaces of the project is one of the factors that, in addition to correct lighting design, greatly enhances the project's design value. In No.7 Nastaran project this includes the use of curved line fixtures combined with surface-mounted spotlights and recessed downlights with circular cross-sections.



more information

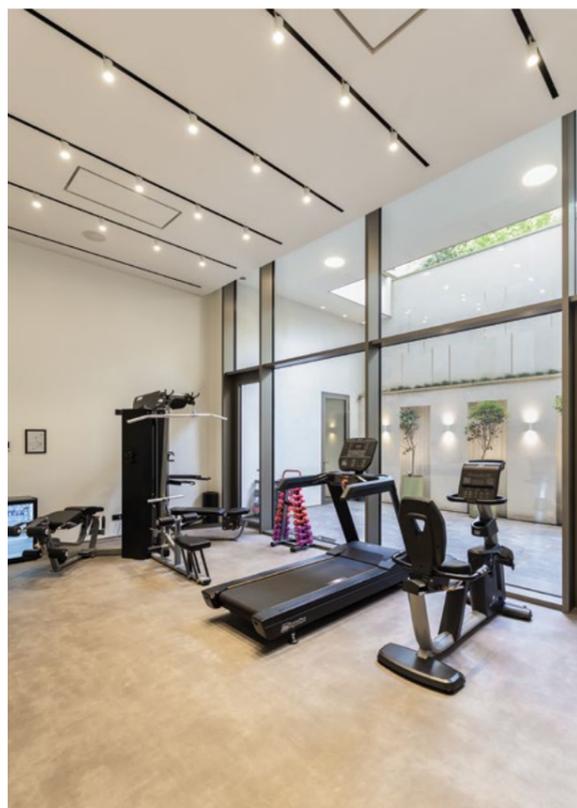

Winner of the 2022
**Architecture
Award**




Chaharsoo Gallery

Retail

The designers of Carpet Charsoo Gallery reinterpreted traditional architectural patterns, creating an innovative architectural solution that bridges the past and the present. This project was awarded second place in the 2A Continental Architectural Awards 2023.



more information

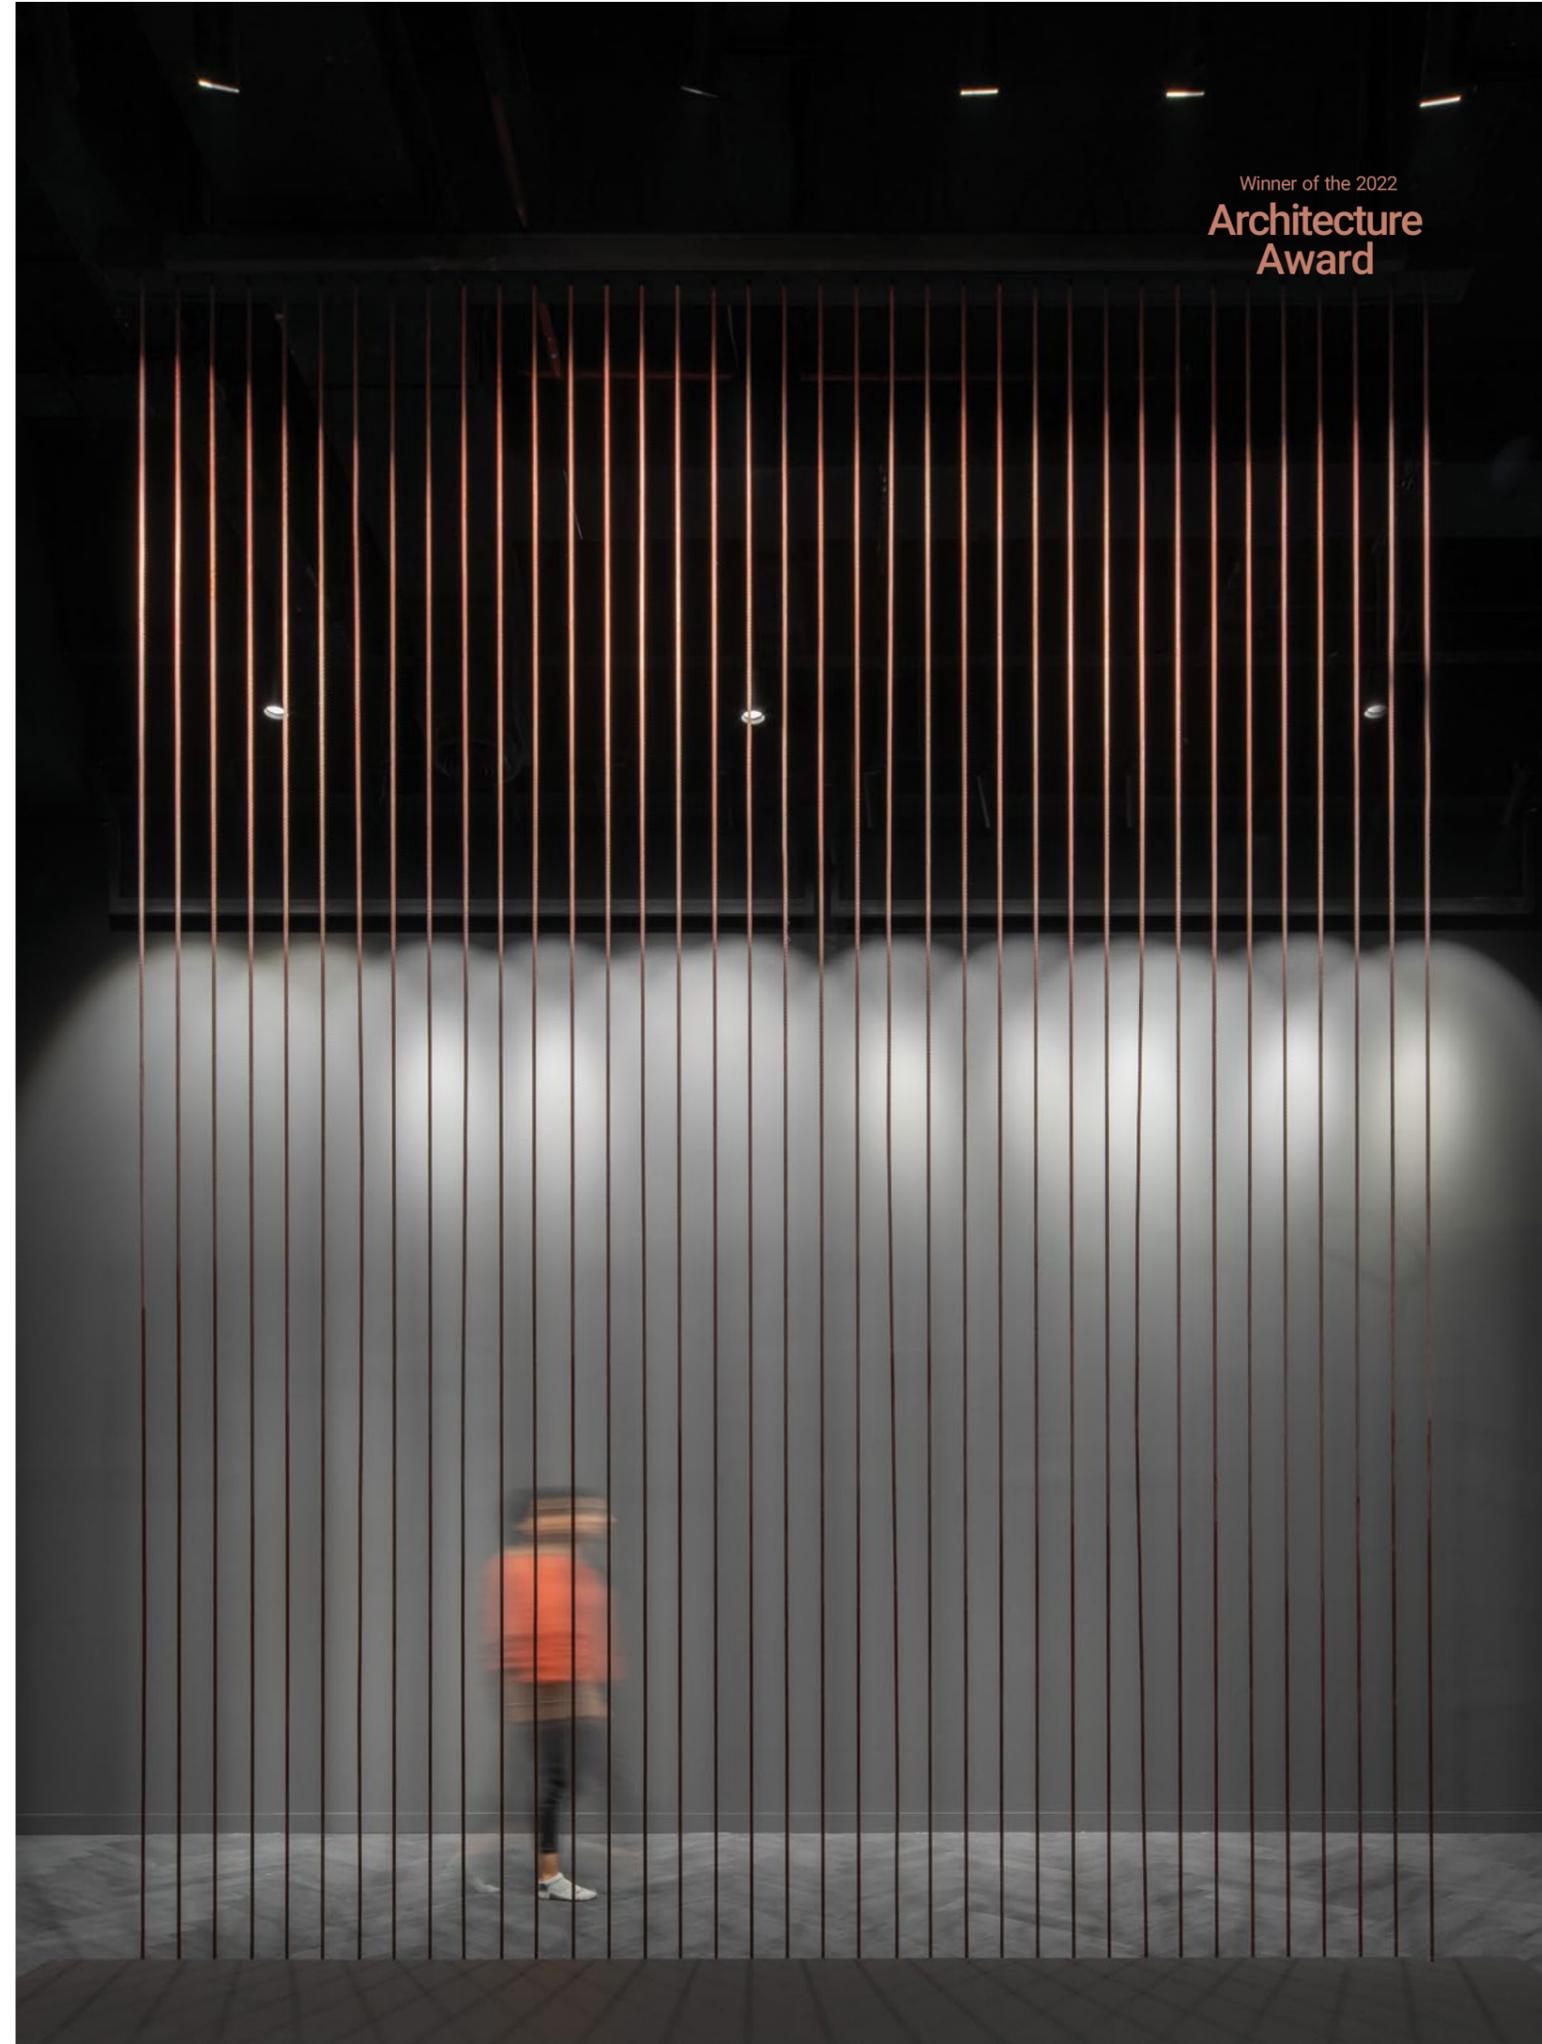

Architecture Award 2021

Mint House

Mint House is a renovation project of an existing villa, where contemporary design interventions were introduced to enhance both spatial quality and atmosphere. The lighting concept is based on pendant linear lights, which emphasize architectural lines while providing uniform and functional illumination.



more information



Architect Prize 2021



Taghrib House

The word taghrib in the name of this project is a concept related to a property that exists in man-made works of art and crafts. The same property that makes man-made works unique and unrepeatable. The lighting of the project is also provided with the opinion of the employer to create a sense of movement and prevent uniformity by using line lights.




more information

Architecture Award 2023

White Trio


White Trio is a small-scale project in one of the main routes of Kashan city. It was the house of Sohrab Sepehri for a short period of time. In the lighting of this project, natural light has been used as much as possible, and minimal luminaires such as "Moonico pendants" have been used.

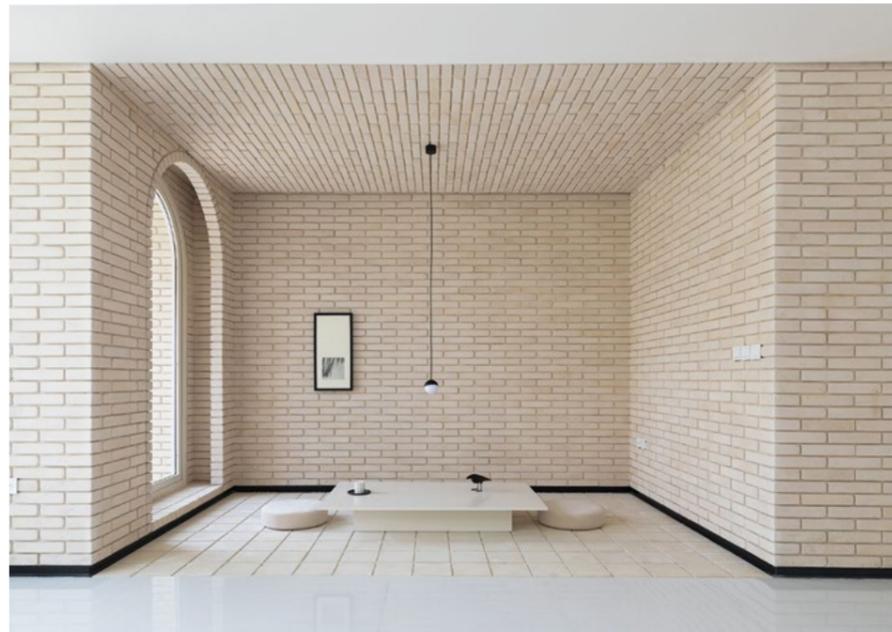

more information



Architect Prize 2020

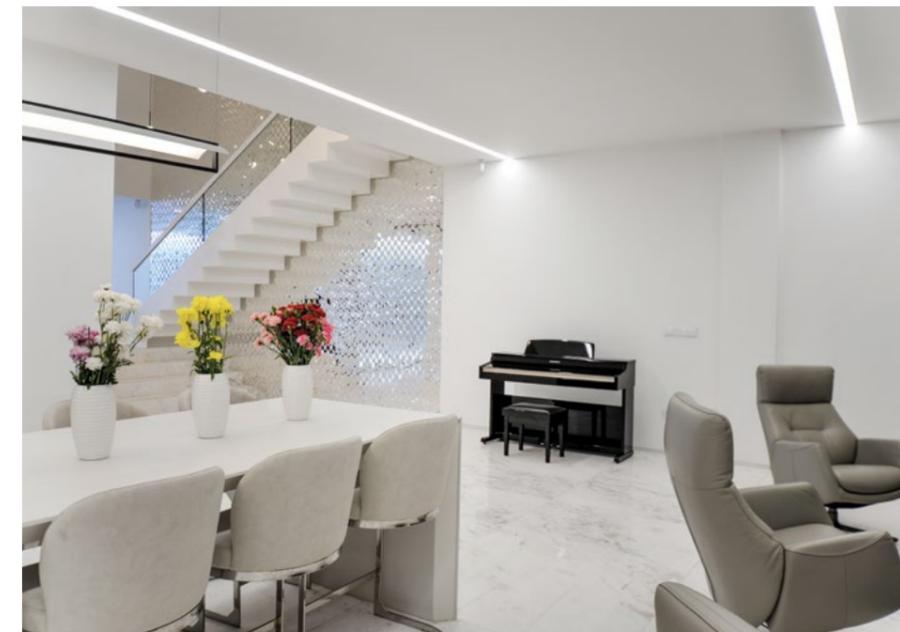

Pakat Apartment

Residential apartment winner of "Memar Magazine" best apartment of the year. Pakat was designed and built using the local architectural idea of having a central yard and in accordance with the culture of Esfahan. The lighting of the project was manufactured and made possible by creating the required infrastructure for the implementation of linear lights.



more information



This **Villa Residential** private project features a modern design with a distinctive form and seeks to establish a strong connection with its surrounding environment. While different spaces within the villa are illuminated using a variety of luminaires, the overall lighting approach focuses on the use of dark-finished fixtures, such as "Lenza" and "Trimo", to achieve visual comfort and a calm, refined atmosphere.



more information

CHARISMA

Office

as a financial holding consists of 8 companies, with high experience in the field of capital market, provides a variety of services to its customers. This project is a multi-functional space for ordinary clients, company personnel and special customers. These spaces are connected by a large and integrated living room. The functions of this living room are separated by flower pots and the form of ceiling.



The product used in this project named "RINGO", designed and manufactured by NEXO, makes a sense of modern architectural lighting as well as providing general lighting.

more information






No.18 Koohyar Residential

This residential complex features a vibrant and rich design, created to support family living and a luxurious modern lifestyle while remaining true to traditional architectural principles. A variety of luminaires including downlights, linear lights, and the Glory system, have been used throughout the project to help achieve this vision.



more information



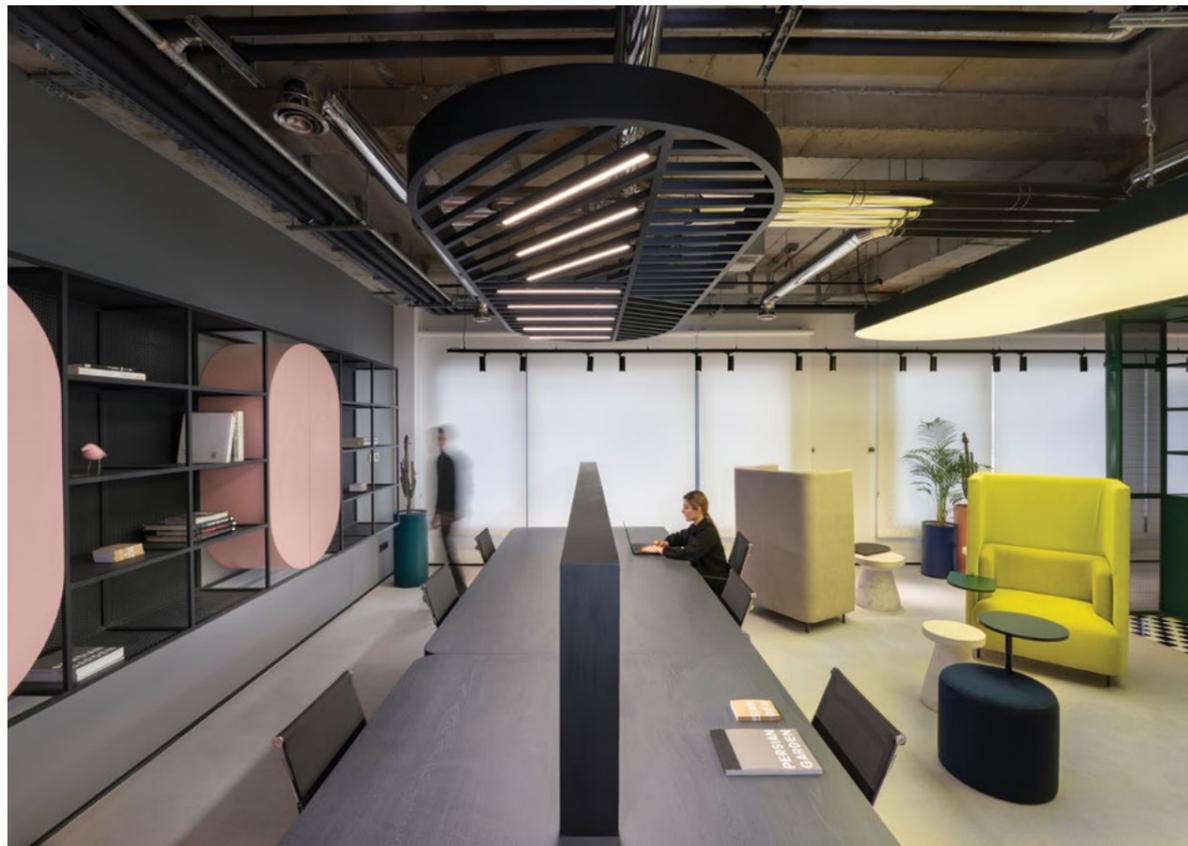


Ghobadian Office office, a manufacturer of cosmetic products, is located in a newly built office building and was designed from the early stages in close alignment with the client's needs. The project focuses on creating a unique and creative design with an open-plan office layout that reflects the brand's innovative identity within its field.



Elements such as color and light, as well as focusing on the effect of reflection and material texture, along with traditional Iranian mirror work with original motifs and shapes, by local artists, lead to the formation of a surreal and practical space that reflects the identity of this company and local interior design.

more information

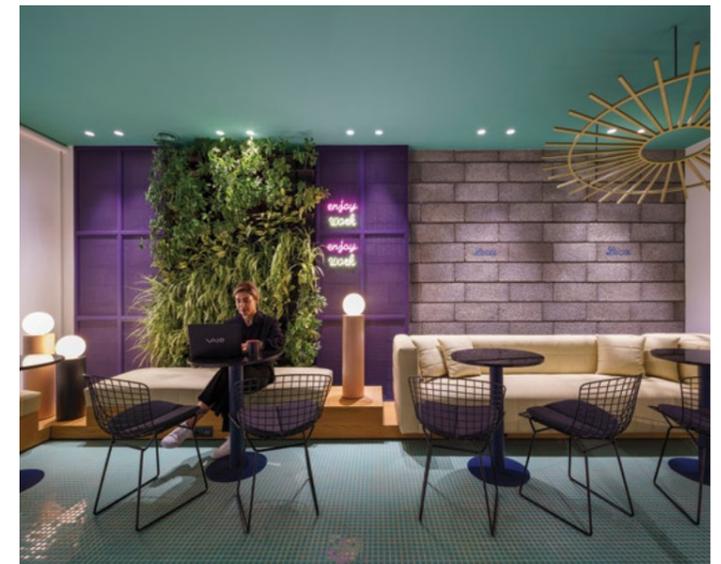



BOOKLAND

Retail & Shop

Using indirect lighting is a suitable way to provide optimal ambient lighting with the least amount of glare and maximum sense of relaxation, the most desirable feeling for a book store. In addition, the lighting of the vertical surfaces of the shelves is the main component in account for proper display of their products. In the Bookland project, for the first time, a linear spot system with uniform and indirect light at the top and the ability of installing spot lights at the down side was designed and produced.



more information





VAKIL Transportation metro station

The exposed elements used in Vakil Metro Station, in addition to expressing the architectural office's design principles, establish a strong connection with the site's historical context. The lighting design, based on linear luminaires, not only enhances readability, wayfinding, and overall illumination, but is also carefully coordinated with the architecture, reinforcing spatial clarity and highlighting the character of the station.



more information



Villa Residential

is a place to find peace and escape the bustle of the city. With this goal in mind, establishing a strong connection with the natural environment was a key principle in the design of this project. Special emphasis was placed on the outdoor areas and the roof garden; therefore, spaces such as the living room, dining area, and jacuzzi were designed as open-air environments to enhance the experience of nature. The lighting of the exterior spaces is provided with «View ip68», which is completely compatible with special weather conditions due to its resin structure, and in addition to its proper function, it has been used as one of the main elements of the design.



more information



Retail

One of the key aspects of store lighting and brand representation is providing proper general illumination while presenting products in the best possible way, attracting attention without compromising visual comfort, light quality, or glare control. In the lighting design of the Samsung store, "Spotline" system is used to emphasize products, enhance visual clarity, and create a balanced, comfortable shopping experience aligned with the brand's identity.



Watch Video
more information




Continuous pendant linear luminaires, each extending over 20 meters in length and installed at a height of more than 5 meters, provide the general lighting for this hypermarket. The system delivers a uniform illuminance of 800 to 1000 lux at floor level, ensuring optimal visibility, comfort, and a well-lit shopping environment.



more information



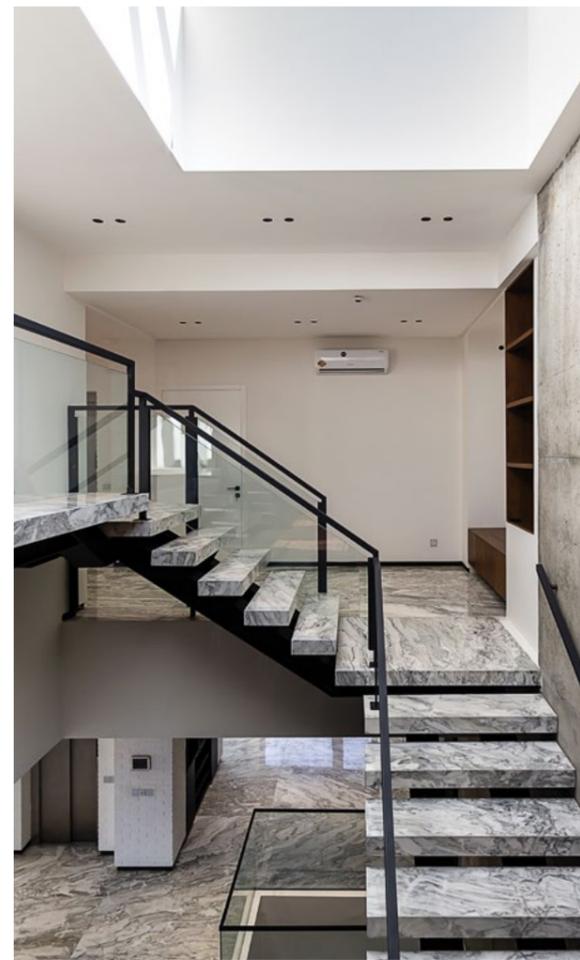

Villa Residential

Fasham
In order to maximizing visual comfort in residential applications, using Trimo darklight family can be a key point in the creation of a warm and home-like atmosphere.



more information



Pooyesh Healthcare



Pooyesh clinic includes different spaces in the fields of infertility treatment for women and men. In the lighting design of this clinic, luminaires suitable for the function and needs of each space have been used, such as Echo recessed, Relax, Line, etc.



[more information](#)



Mehrabad International Airport


Transportation



The international airport features a linear lighting system designed to complement the louvered ceiling and overall architectural atmosphere, providing efficient general illumination while enhancing the spatial rhythm and visual clarity of the interior.



more information

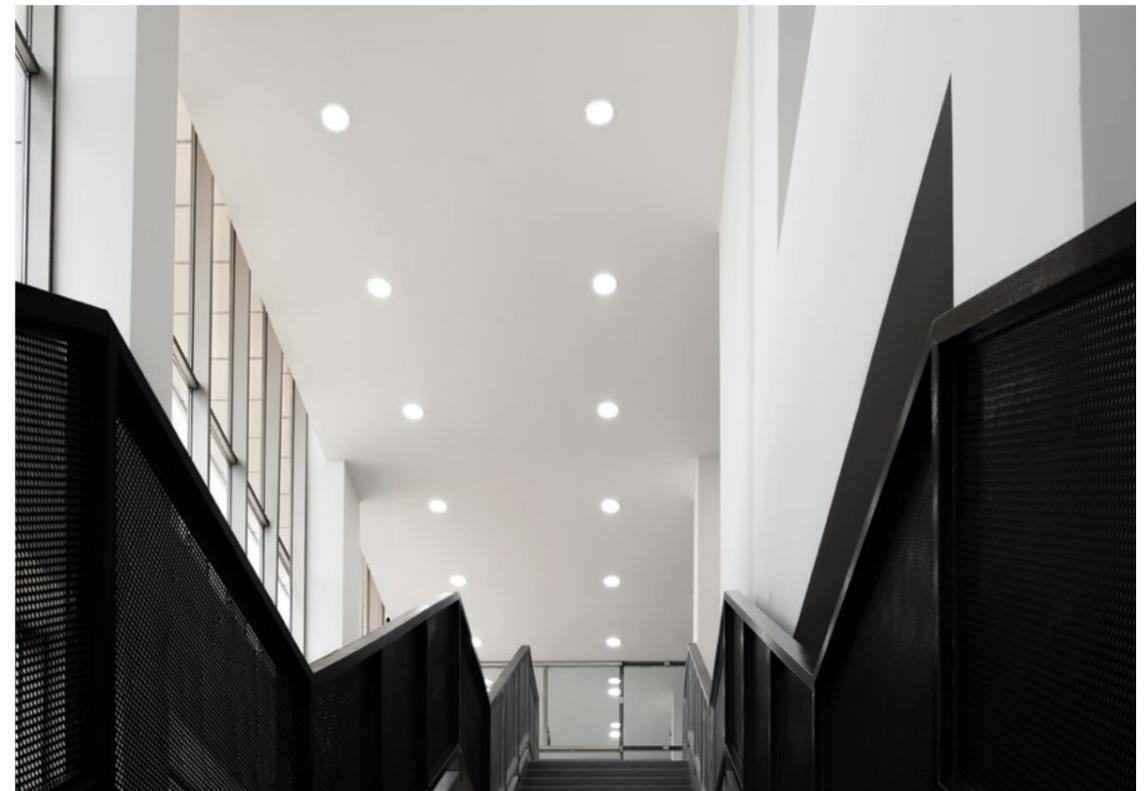

LIGHT
TING
PROD
UCTS

nexolighting.com/luminaires

MULTI TRACK SYSTEM

48V Low-Voltage Track System



 MAGNETIC CONNECTION

 AIR CONDITIONING

 BLUETOOTH SPEAKER

 AIR FRESHENER


MULTI TRACK system is a very flexible solution of moving luminaires along the track. Thanks to it, lighting modules are magnetically connected to 48V low voltage tracks. Magnetic track lighting allows users to create different lighting arrangements for various applications, and depending on interior design trends, any change in position of the appropriate luminaires is possible.



Watch Video

EVERYTHING ON TRACK

48V TRACK SYSTEM

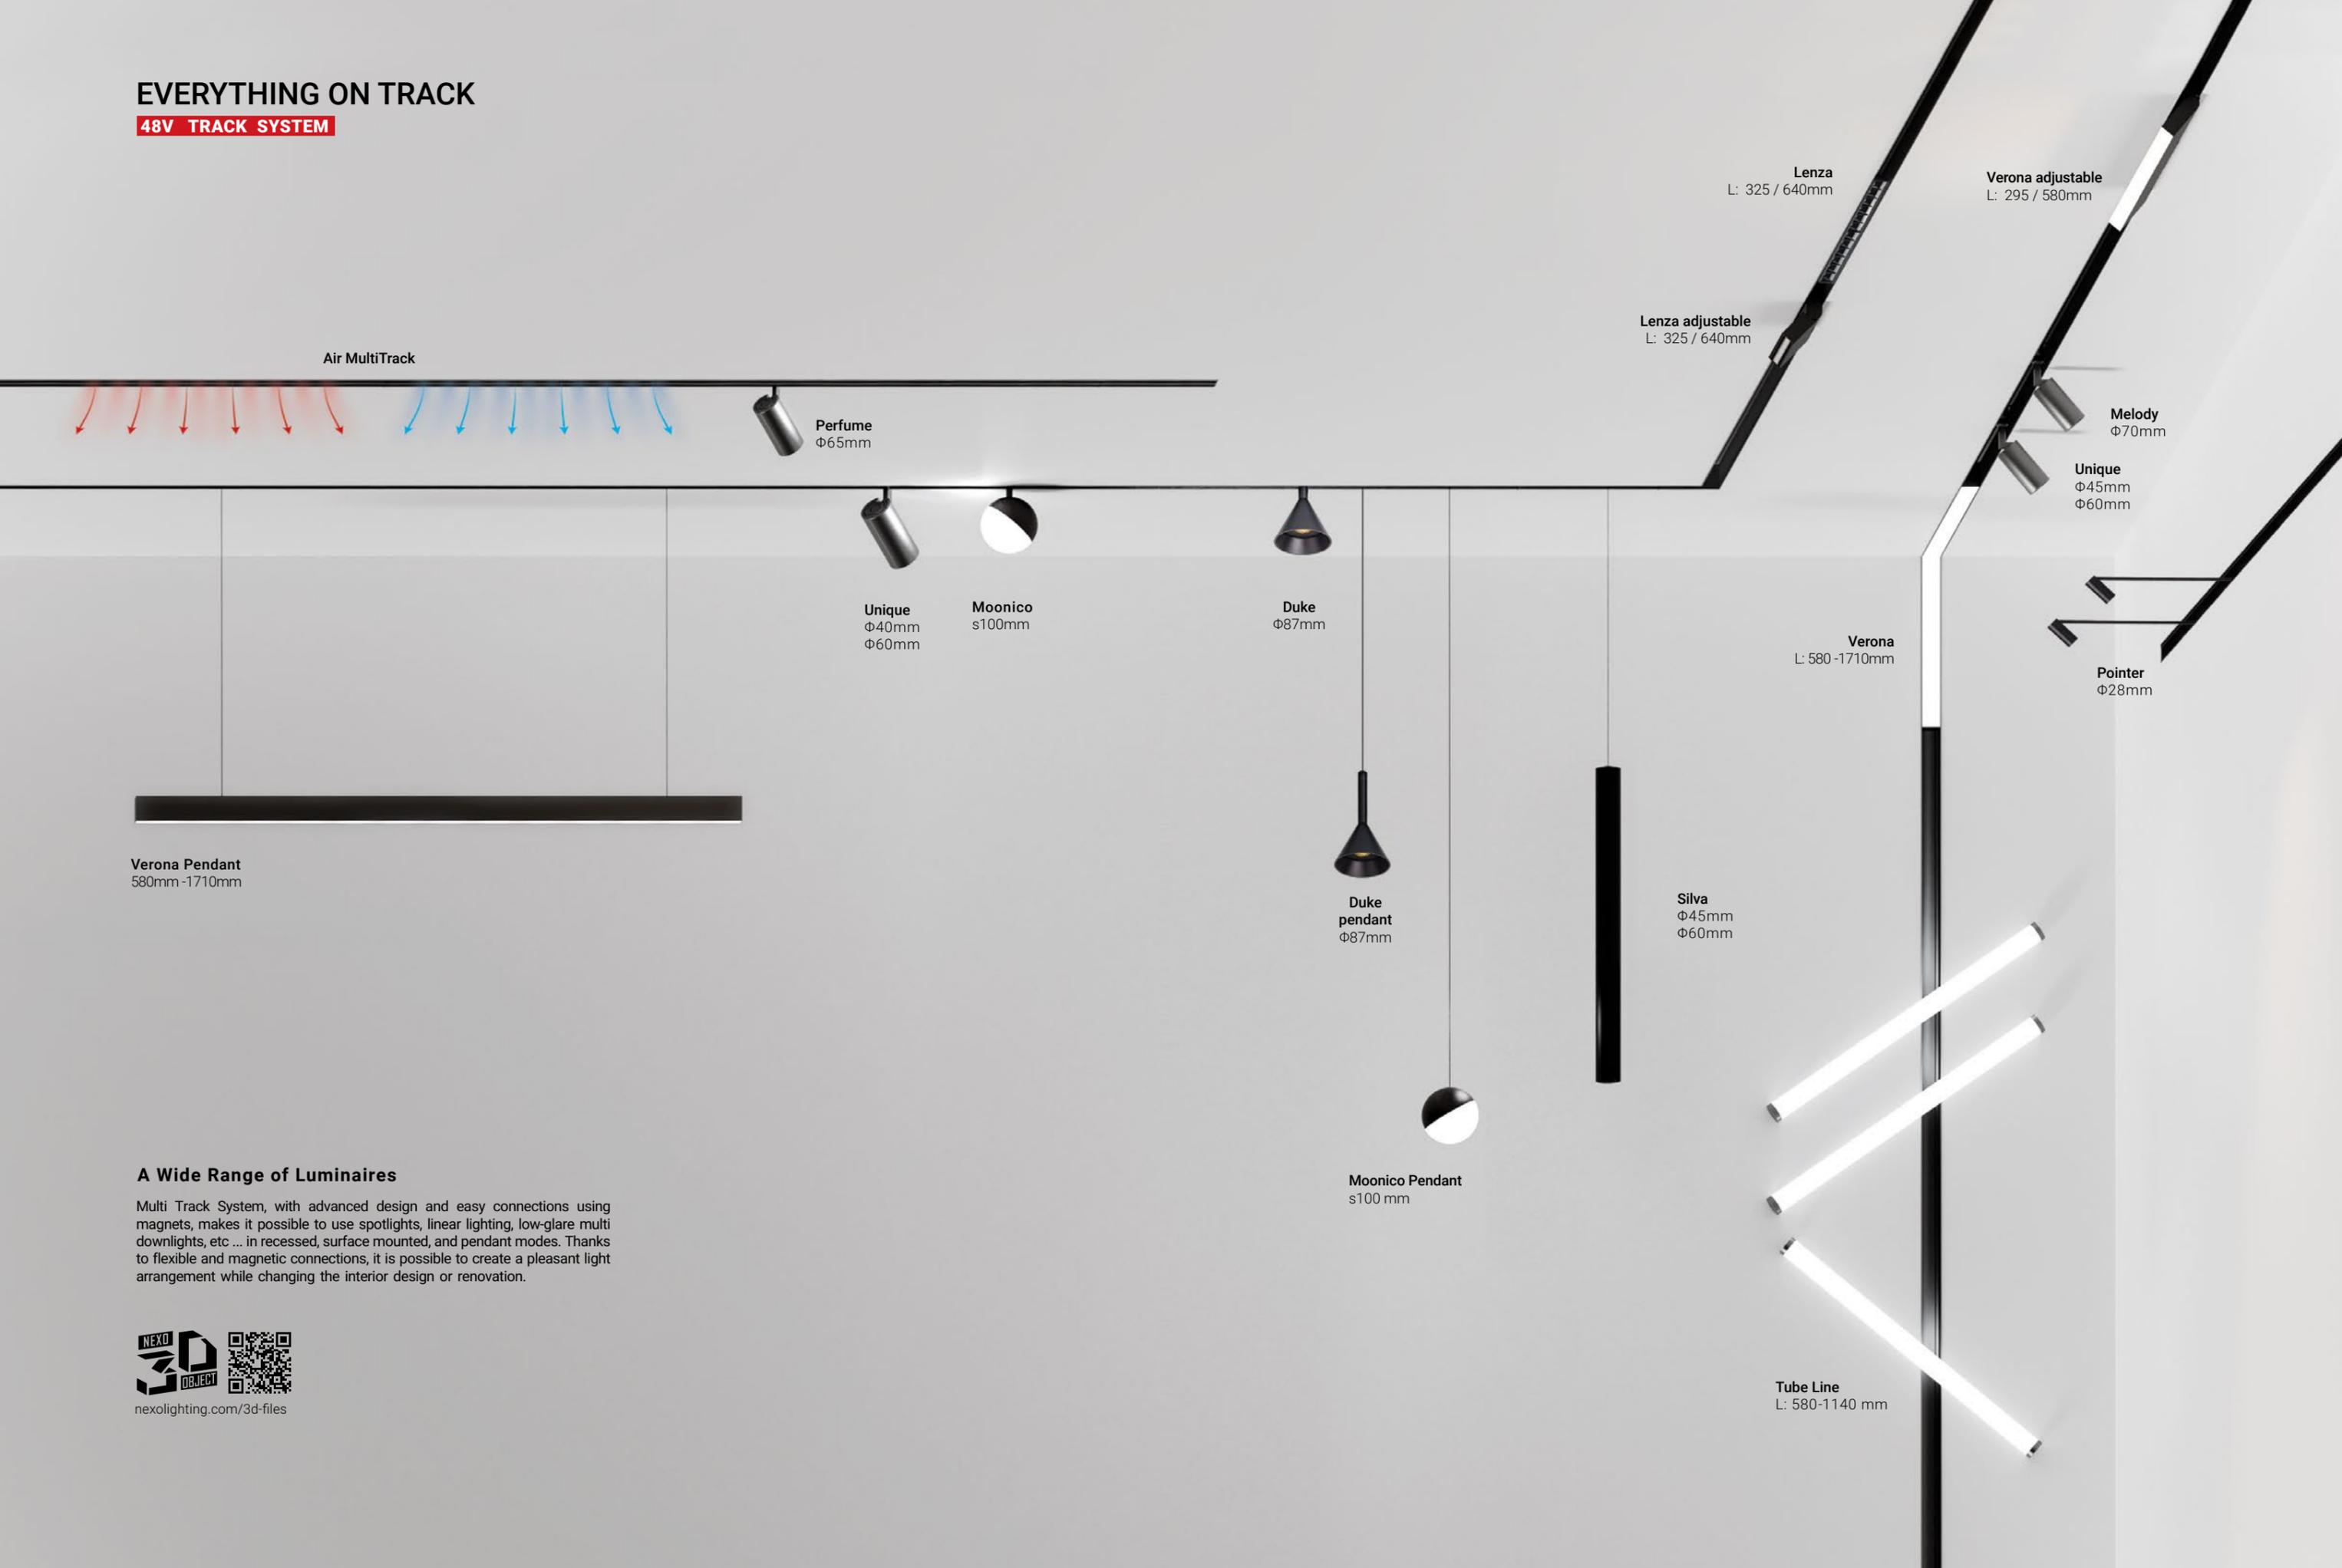

Air MultiTrack

Perfume
Φ65mm

Unique
Φ40mm
Φ60mm

Moonico
s100mm

Duke
Φ87mm

Duke pendant
Φ87mm

Moonico Pendant
s100 mm

Lenza
L: 325 / 640mm

Verona adjustable
L: 295 / 580mm

Lenza adjustable
L: 325 / 640mm

Melody
Φ70mm

Unique
Φ45mm
Φ60mm

Verona
L: 580-1710mm

Pointer
Φ28mm

Verona Pendant
580mm-1710mm

Silva
Φ45mm
Φ60mm

Tube Line
L: 580-1140 mm

A Wide Range of Luminaires

Multi Track System, with advanced design and easy connections using magnets, makes it possible to use spotlights, linear lighting, low-glare multi downlights, etc ... in recessed, surface mounted, and pendant modes. Thanks to flexible and magnetic connections, it is possible to create a pleasant light arrangement while changing the interior design or renovation.






nexolighting.com/3d-files


MULTI TRACK FEATURES

FEEDING OPTIONS

1- Internal driver



2- External driver



Easy relocation and movement of luminaires thanks to magnetic connections




Secure 48V power for wires inside the rails and Safety lock for luminaires.



Light color dimming and tunable white system



Track mount drivers without the need for a ceiling access

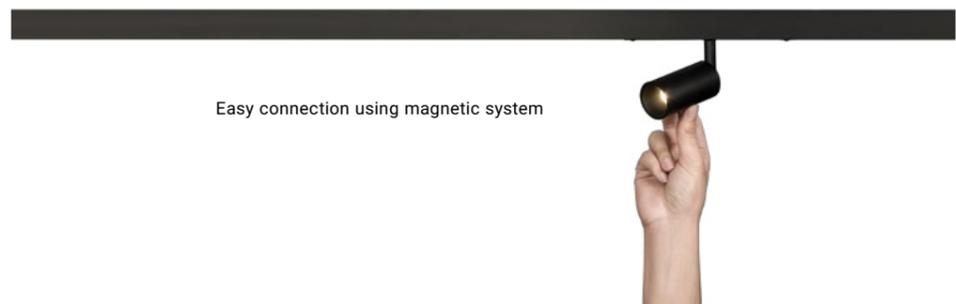

Easy connection using magnetic system



MAGNETIC CONNECTION 48V TRACK SYSTEM



- Silva**
Ø40 mm | 6w | 680 lm
Ø60 mm | 10w | 1230 lm
- Unique**
Ø40 mm | 6w | 680 lm
Ø60 mm | 10w | 1230 lm
- Moonico**
s100 mm | 6w | 316 lm
- Moonico Pendant**
s100 mm | 6w | 316 lm
- Lenza**
325 mm | 15w | 1500 lm
- Verona**
580 mm | 17w | 1687 lm
1140 mm | 33w | 3374 lm
1710 mm | 49.4w | 5061 lm
- Lenza Adjustable**
325 x 34 x 82 mm | 15w | 1500 lm
- Verona Adjustable**
295 x 34 x 82 mm | 17.8w | 1687 lm
- Tube line**
580 mm | 17w | 1687 lm
860 mm | 26w | 2527 lm
1140 mm | 33w | 3374 lm
- Pointer**
Ø28 mm | 6w | 500 lm
- Duke**
Ø87 mm | 6w | 610 lm
- Duke Pendant**
Ø87 mm | 6w | 610 lm
- Melody Speaker**
Ø70 mm | 10w
- Perfume**
Ø65 mm | 2w

QR code
installation
more information
3D object


Rooyan Darou Company



LOW VOLTAGE MAGNETIC TRACKS

Any Length and Configuration

A variety of rails with different installation methods are produced in types of surface mount, pendant, low-height trimless recessed, high-height completely hidden inside the rails).

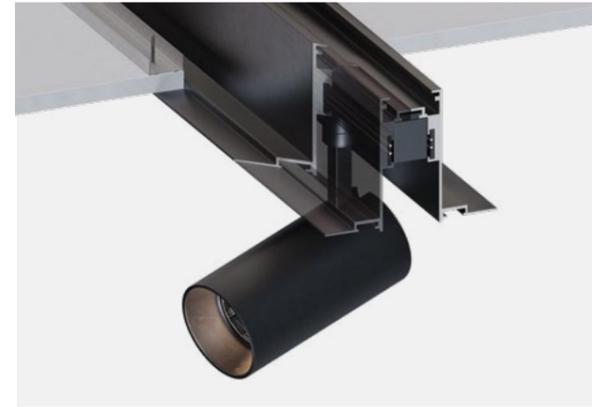

nexolighting.com/multitrack/

Low height Recessed profile
cut: 30mm

Low height surface mount profile

Pendant profile

Low Height Pendant profile

Recessed profile
cut: 50mm

Trimless recessed profile 2
cut: 50mm

Trimless recessed profile 1
cut: 70mm

80 mm

80 mm

80 mm


32mm

80 mm

32mm

30,6mm

AIR
Multi Track

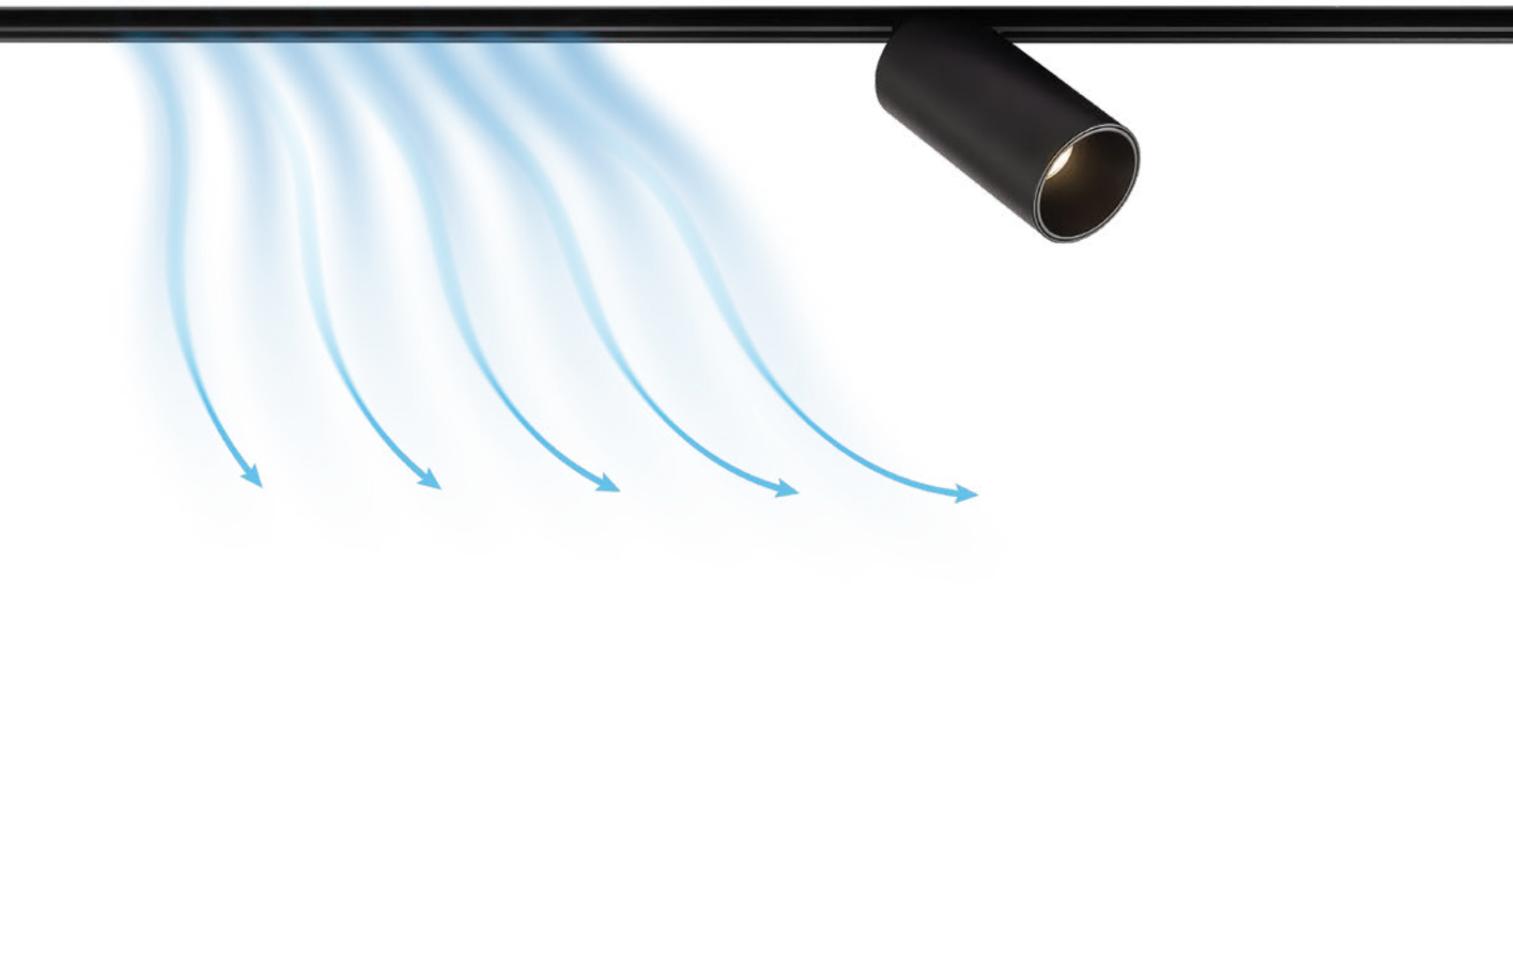

Air Multi Track System

- Integration of linear slot air diffusers with the Multi Track magnetic lighting system.
- Flexibility to choose from single, double, or triple slot profiles.
- Simultaneous experience of lighting and air conditioning with an integrated and minimal appearance.
- Ability to direct airflow.



Watch Video
more information



Magnetic Connection




Air Conditioning

AIR
Multi
Track



AIR MULTI TRACK

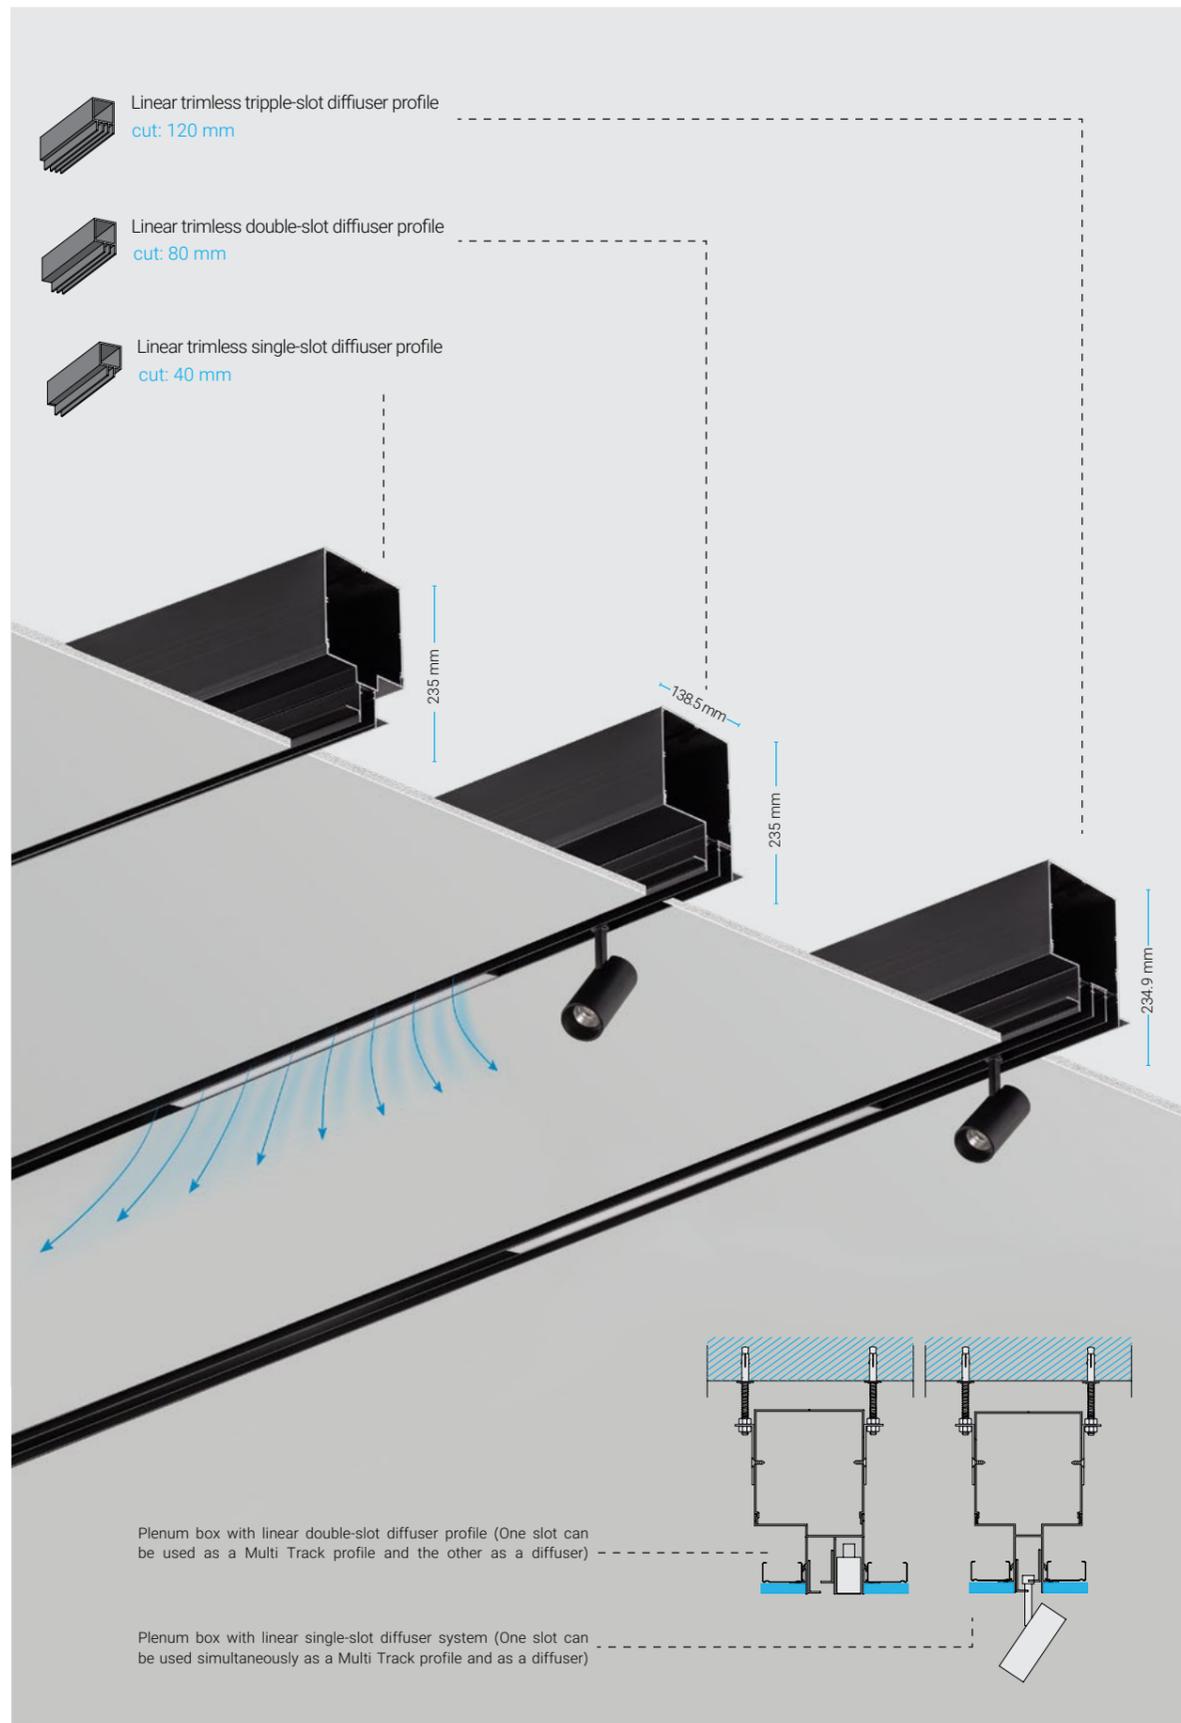


AIR MULTI TRACK

Instruction



AIR MULTI TRACK


Instruction

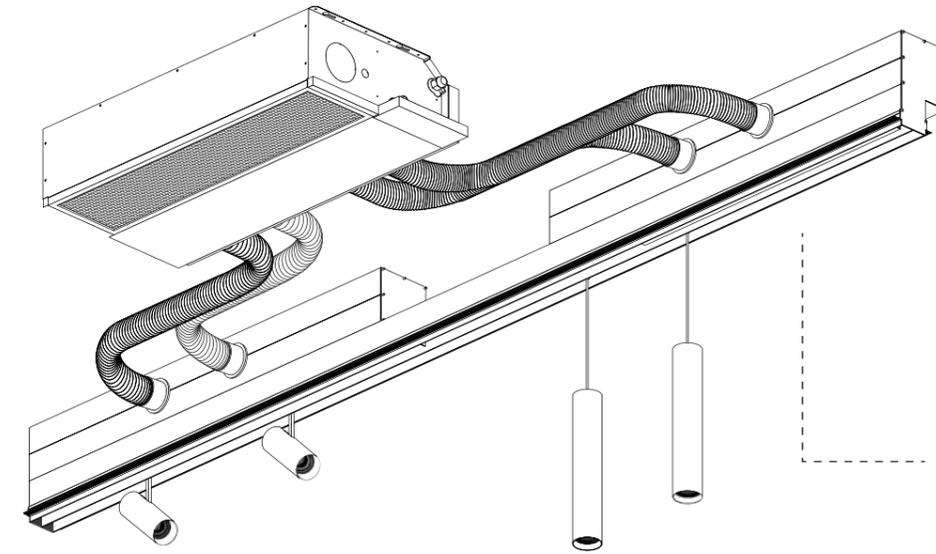

sample installation: linear double-slot diffuser system with magnetic light sources.




Method of substructure and connection of Air Multi Track profile and plenum box to the false ceiling structure

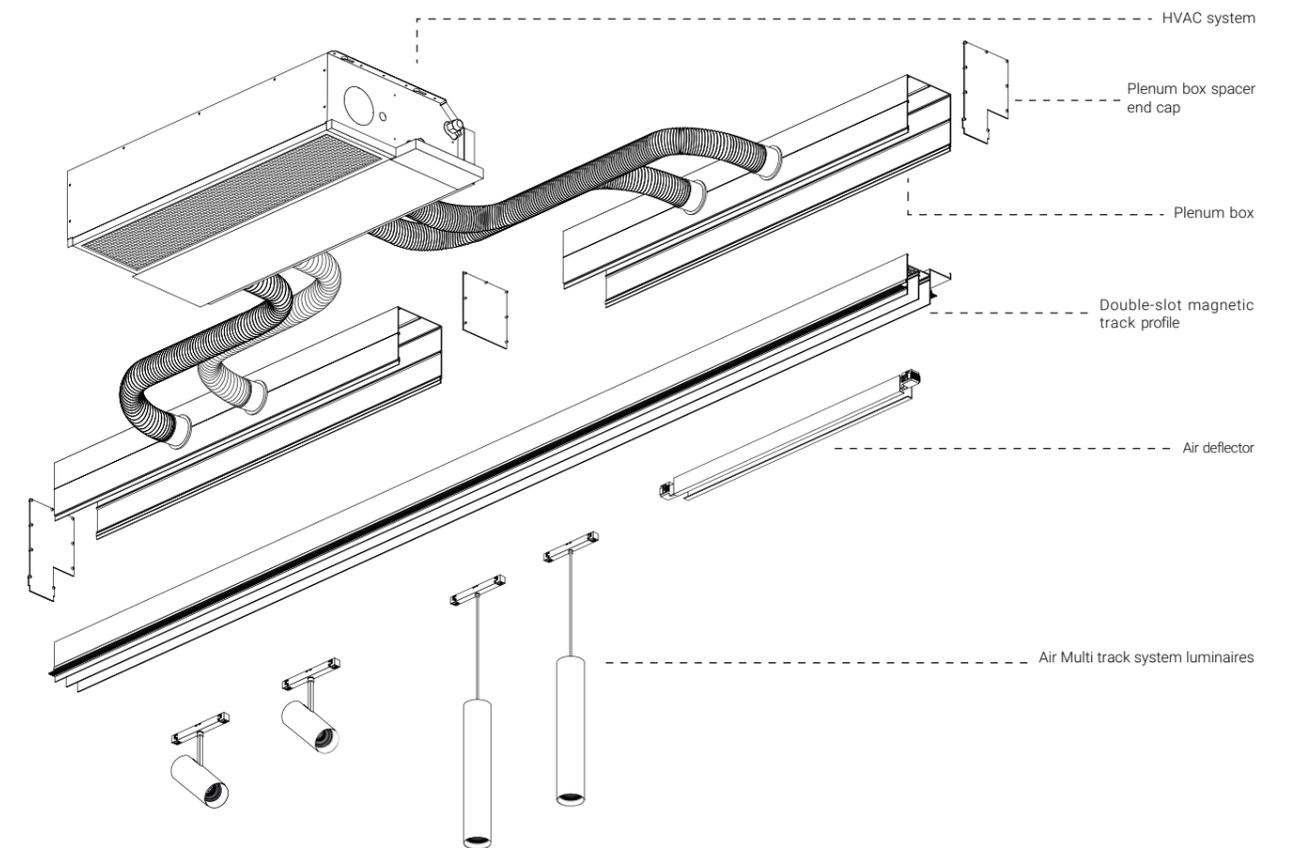


AIR MULTI TRACK

Component Details




AIR SPACER
CAP



AIR CAP

Plenum box

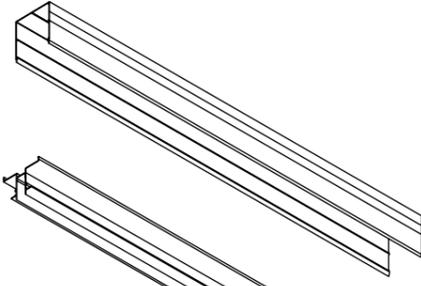


Main slot diffuser profile




Track profile insert




Air deflector

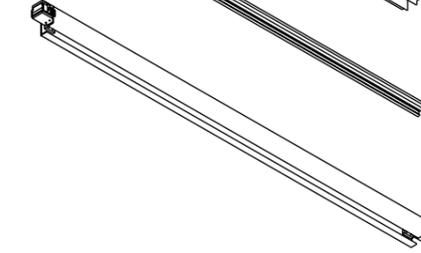


Installation Instruction

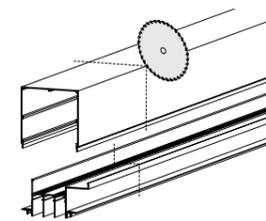


Plenum box and profile cut in customized lengths

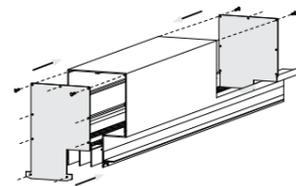


Installing profile and plenum box end cap

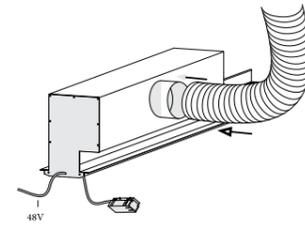

Side / End entry for ventilation

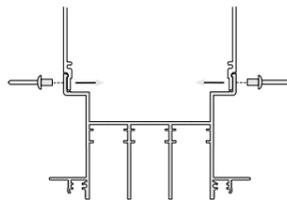

Assembling and securing profile and plenum box with rivets.

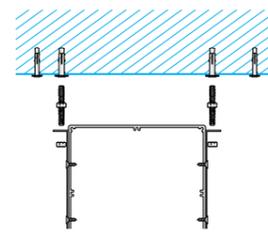

Installing studs on the ceiling and fixing mounting corners on the studs using screws




CONTROLLABILITY

The DALI Light Control System:

The digital addressable lighting interface (DALI) is a major lighting control platform with many features, including zoning, grouping, and implementing lighting scenarios and modifying them at any time for a maximum of 64 members (128 members in DALI-2). This system is implemented by 1. wiring the control system between components and lights, and 2. using a combination of wireless and wired systems for component and light communication. This protocol's unique features include its ability to receive data feedback and diagnose lights. Lights supporting the DALI protocol can be used in building automation systems like KNX and converter components (gateways).



Watch Video
installation more information
3D object

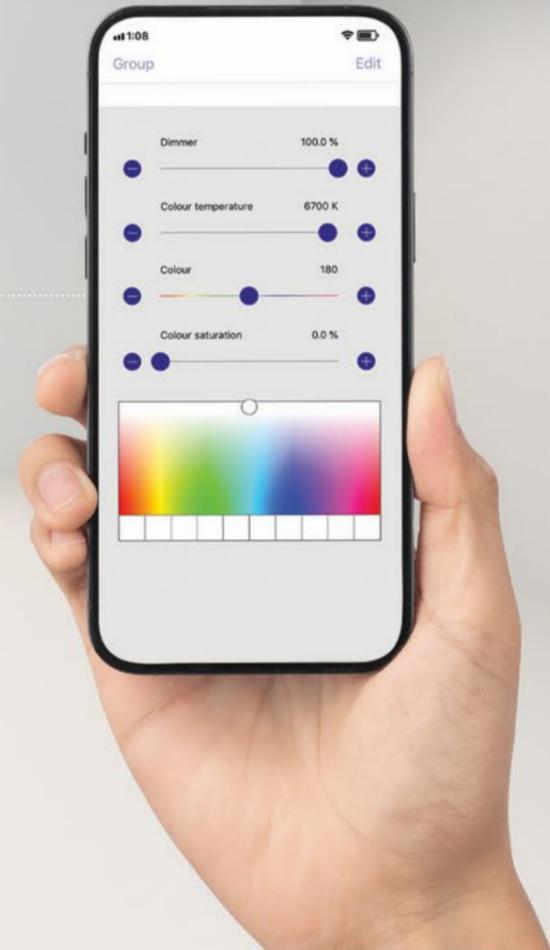


download
4remote BT
application



GET IT ON
Google Play
Download on the
App Store

TUBE LINE

Multi Track

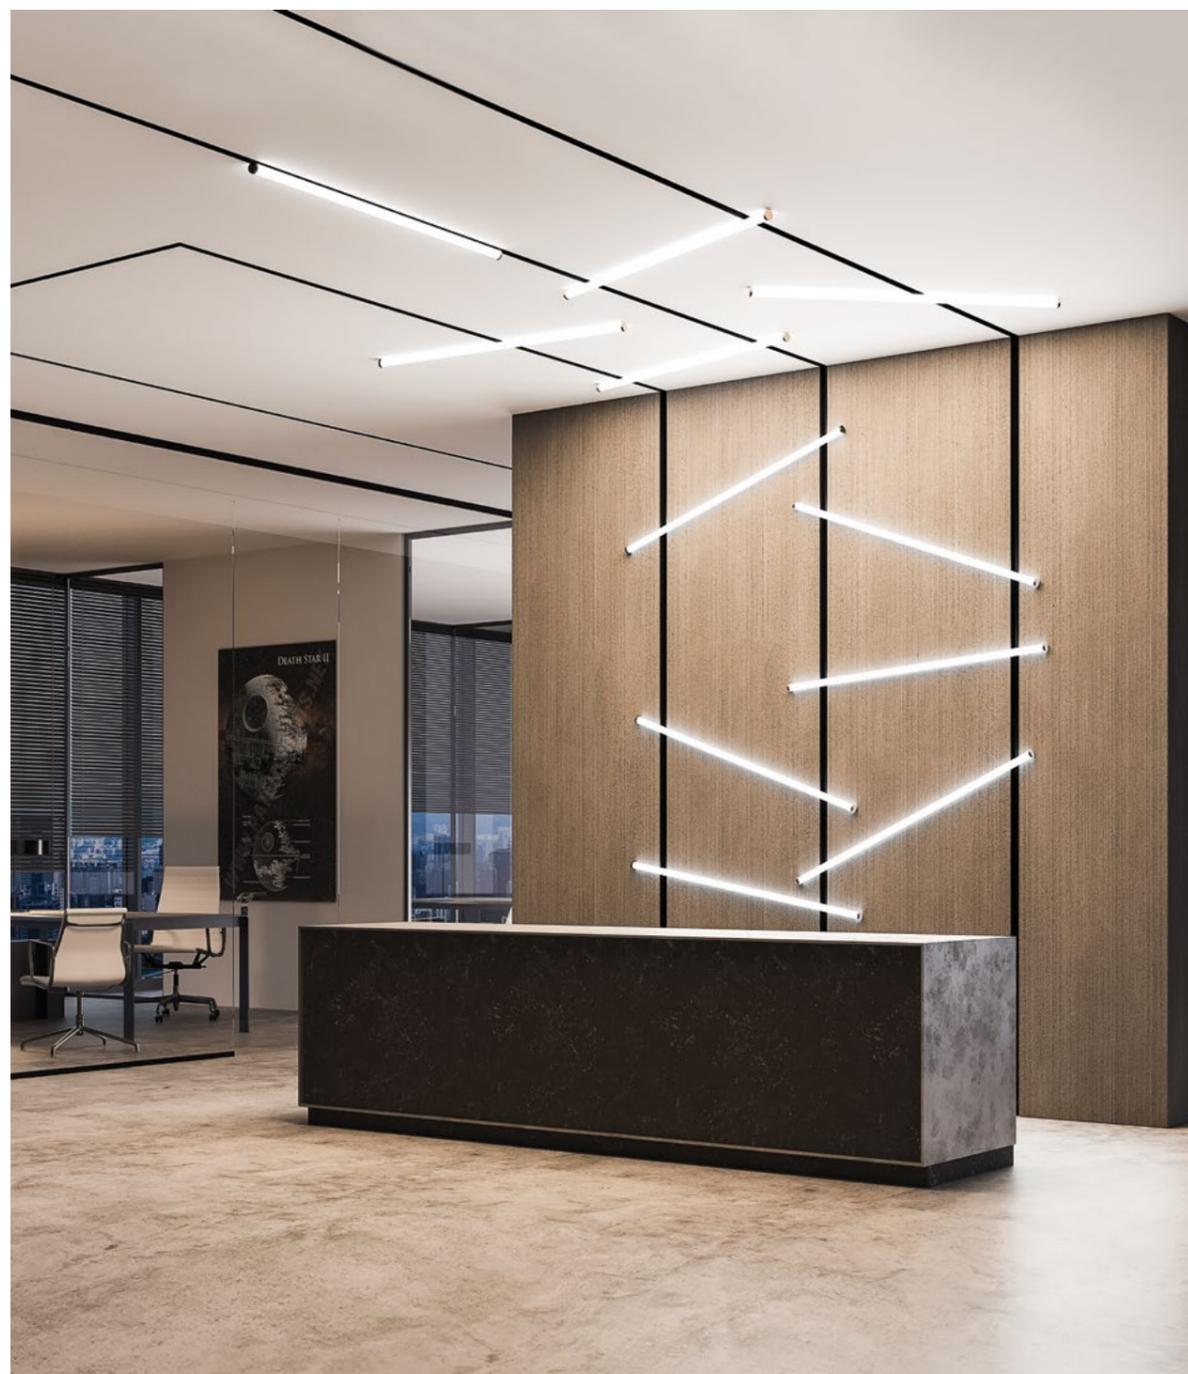

POINTER

Multi Track



VERONA

Multi Track



Verona
580 mm | 17.8w | 1687 lm
1140 mm | 33.6 w | 3374 lm
1710 mm | 49.4 w | 5061 lm

LENZA

Multi Track



Lenza
325 mm | 15w | 1500 lm



Hebemys Coffee boutique

VERONA ADJUSTABLE

Multi Track



Verona Adjustable
295 x 34 x 82 mm | 17.8w | 1687 lm

LENZA ADJUSTABLE

Multi Track



Lenza Adjustable
325 x 34 x 82 mm | 15w | 1500 lm



Private Residence

UNIQUE 60

Multi Track



Unique
Ø60 mm | 10w | 1230 lm

UNIQUE 45


Multi Track



Unique
Ø45 mm | 6w | 680 lm

MOONICO

Multi Track

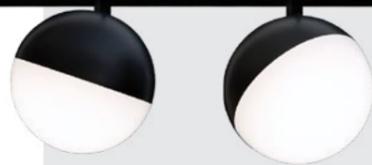

Moonico
S100 mm | 6w | 316 lm



Private Residence

MOONICO PENDANT

Multi Track



Moonico Pendant
S100 mm | 6w | 316 lm

SILVA PENDANT

Multi Track



Silva
Ø40 mm | 6w | 680 lm
Ø60 mm | 10w | 1230 lm



Villa No. 64

MELODY
Multi Track



Multi Track Melody Bluetooth speaker

- Capable of being moved thanks to its magnetic connection on various rails
- Ability to pair multiple speakers together for wider area coverage
- Designed to match other multi track system components.



Watch Video
more information



MELODY
Multi Track



PERFUME
Multi Track



Air freshener for multi track system

- Accessible reservoir for using a variety of liquid fragrances
- 2 wattage silent fan
- Designed to match other multi track system components



Watch
Video
more information



Perfume Multi Track
Ø65 mm | 2w




Magentic
Connection

PERFUME
Multi Track





 **Duke**
Ø87 mm | 6w | 610 lm

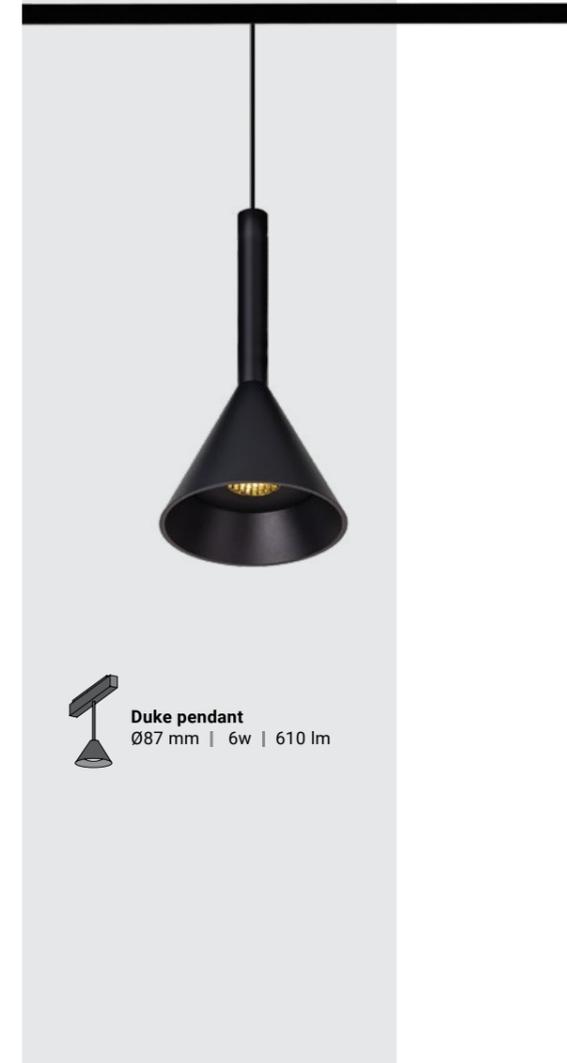


 **Duke pendant**
Ø87 mm | 6w | 610 lm




ALAIÁ RESTAURANT

PROFILE DETAILS

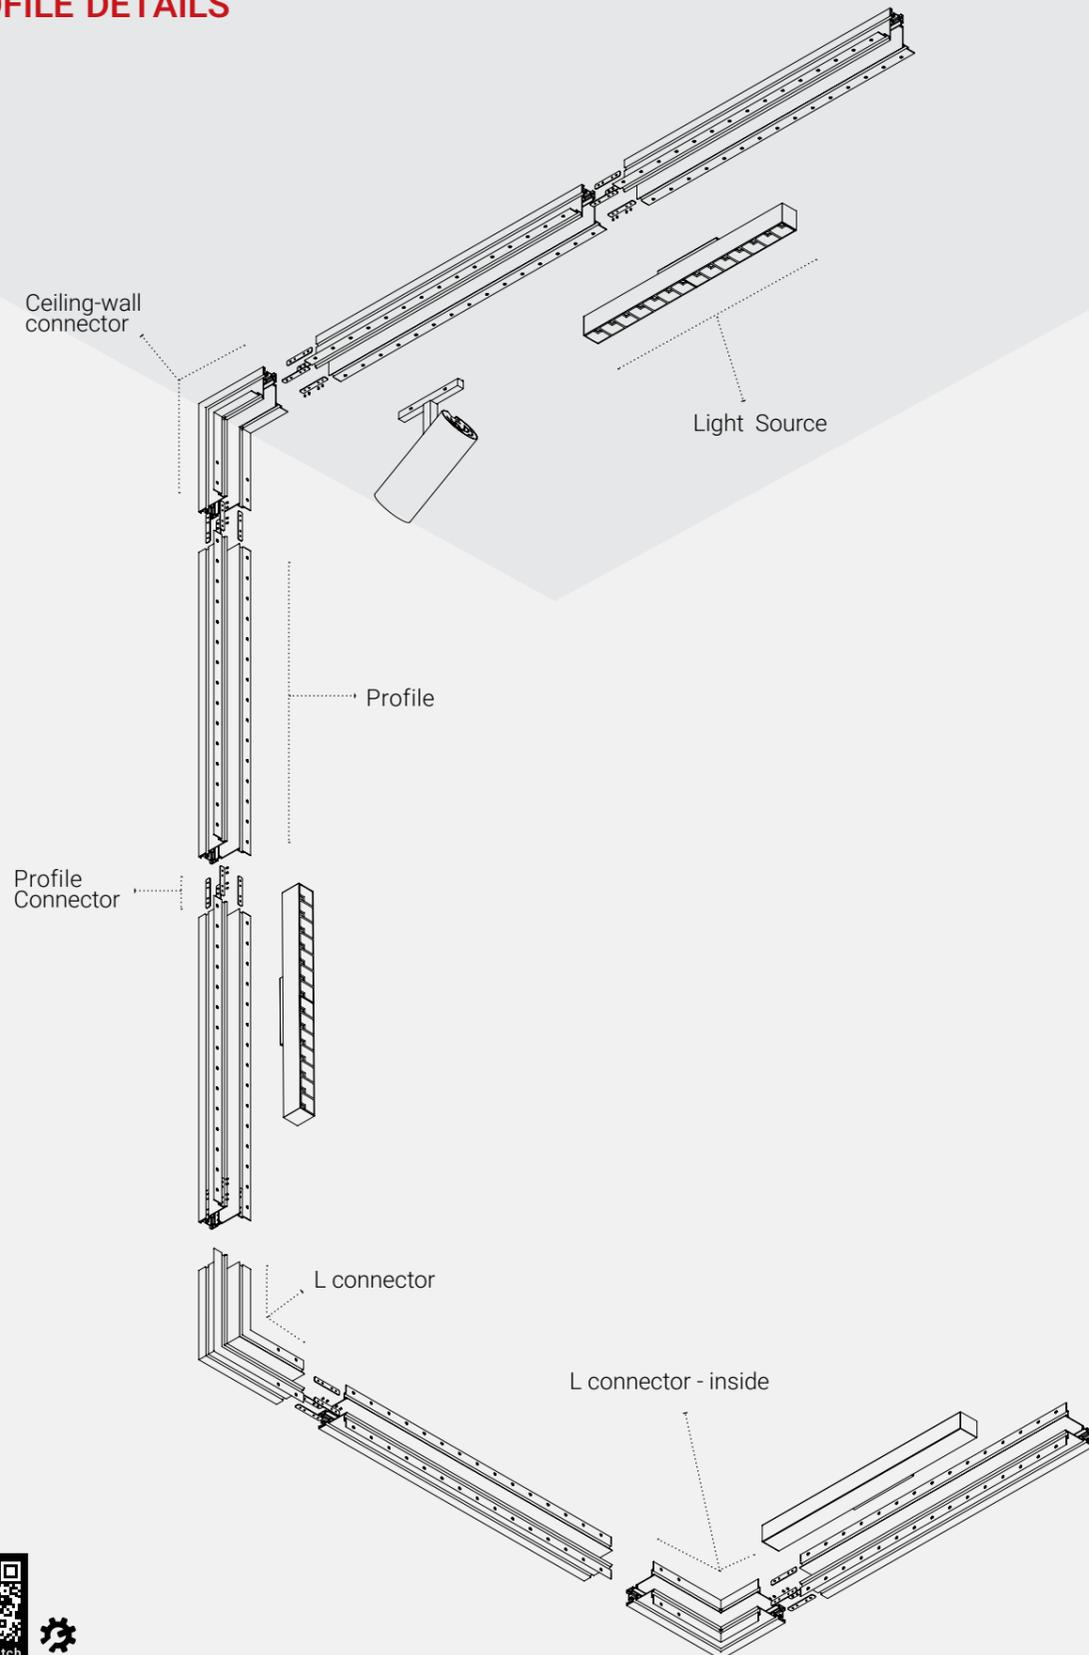

MULTI TRACK

Section view Profile

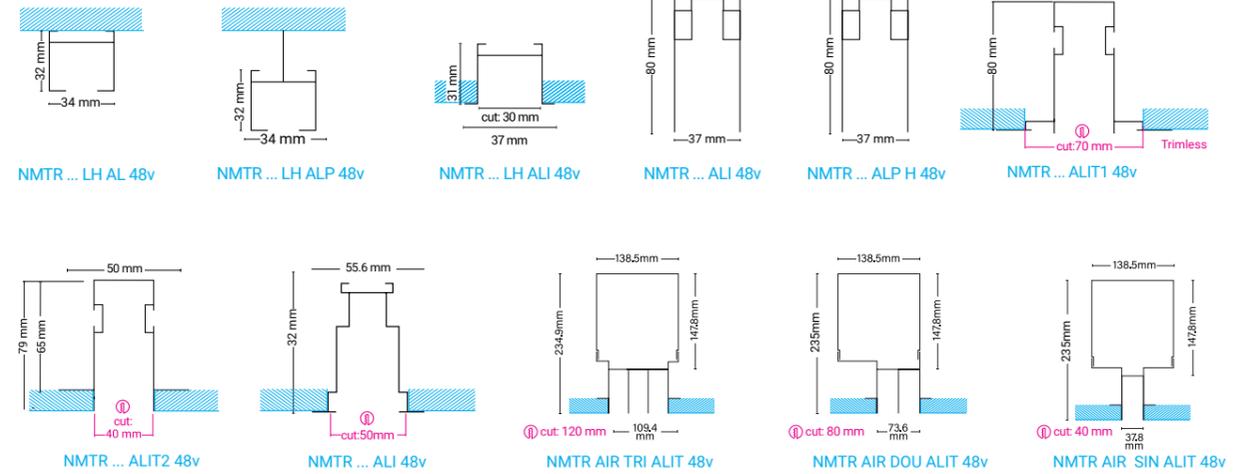

Technical Details

Profile (Surface - Pendant)

| Reference | Conductor | voltage | Length |
|------------------------|-----------|---------|---------|
| NMTR 100 AL/ALP 48v | 4 | 48v | 1000 mm |
| NMTR 200 AL/ALP 48v | 4 | 48v | 2000 mm |
| NMTR 300 AL/ALP 48v | 4 | 48v | 3000 mm |
| NMTR 100 LH AL/ALP 48v | 4 | 48v | 1000 mm |
| NMTR 200 LH AL/ALP 48v | 4 | 48v | 2000 mm |
| NMTR 300 LH AL/ALP 48v | 4 | 48v | 3000 mm |

Profile (Recessed)

| Reference | Conductor | voltage | Length |
|---------------------|-----------|---------|---------|
| NMTR 100 ALI 48v | 4 | 48v | 1000 mm |
| NMTR 200 ALI 48v | 4 | 48v | 2000 mm |
| NMTR 300 ALI 48v | 4 | 48v | 3000 mm |
| NMTR 100 LH ALI 48v | 4 | 48v | 1000 mm |
| NMTR 200 LH ALI 48v | 4 | 48v | 2000 mm |
| NMTR 300 LH ALI 48v | 4 | 48v | 3000 mm |

Profile (Recessed TRIMLESS)

| Reference | Conductor | voltage | Length |
|----------------------|-----------|---------|---------|
| NMTR 100 ALIT1 48v | 4 | 48v | 1000 mm |
| NMTR 200 ALIT1 48v | 4 | 48v | 2000 mm |
| NMTR 300 ALIT1 48v | 4 | 48v | 3000 mm |
| NMTR 100 ALIT2 48v | 4 | 48v | 1000 mm |
| NMTR 200 ALIT2 48v | 4 | 48v | 2000 mm |
| NMTR 300 ALIT2 48v | 4 | 48v | 3000 mm |
| NMTR 100 LH ALIT 48v | 4 | 48v | 1000 mm |
| NMTR 200 LH ALIT 48v | 4 | 48v | 2000 mm |
| NMTR 300 LH ALIT 48v | 4 | 48v | 3000 mm |

Air Multi track(Recessed)

| Reference | Conductor | voltage | Length | Length |
|-----------------------|-----------|---------|--------|----------------------|
| NMTR Air SIN ALIT 48v | 4 | 48v | 1 | L x 138.5 x 234.9 mm |
| NMTR Air DOU ALIT 48v | 4 | 48v | 2 | L x 138.5 x 234.9 mm |
| NMTR Air TRI ALIT 48v | 4 | 48v | 3 | L x 138.5 x 234.9 mm |



Watch Video
multi-track installation

Section View Unique




Technical Details

Unique Multi track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|--------------------------|-----------|-----------------|--------------------|---------------|
| NU 40 ... R PCT 48v | 6 | 113.3 | 680 | Ø41.5 |
| NU 60 ... R PCT 48v (H1) | 6 (10) | 123 | 726 (1230) | Ø61.5 |

H1: Higher wattages

Section View Silva

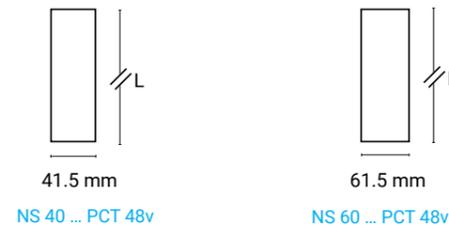


Technical Details

Silva Multi track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|------------------------|-----------|-----------------|--------------------|---------------|
| NS 40 ... PCT 48v | 6 | 113.3 | 680 | Ø41.5 |
| NS 60 ... PCT 48v (H1) | 6 (10) | 123 | 758 (1230) | Ø61.5 |

H1: Higher wattages

Section View Verona

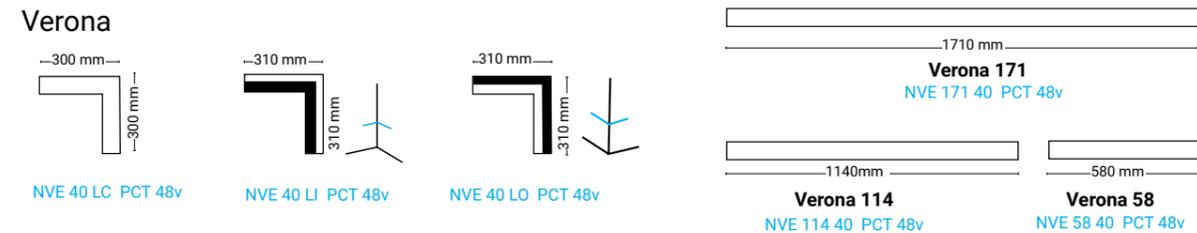


Technical Details

Verona Multi track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimensions (mm) |
|--------------------|-----------|-----------------|--------------------|-------------------|
| NVE 40 58 PCT 48v | 17.8 | 94.7 | 1687 | 580 |
| NVE 40 114 PCT 48v | 33.6 | 100.4 | 3374 | 1140 |
| NVE 40 171 PCT 48v | 49.4 | 102.4 | 5061 | 1710 |
| NVE 40 LC PCT 48v | 17.8 | 94.7 | 1687 | L Ceiling 300x300 |
| NVE 40 LO PCT 48v | 17.8 | 94.7 | 1687 | L Out 310x310 |
| NVE 40 LI PCT 48v | 17.8 | 94.7 | 1687 | L In 310x310 |

Section View Moonico

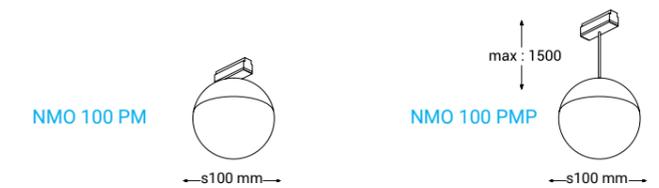

Technical Details

Moonico Multi Track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|-----------------|-----------|-----------------|--------------------|---------------|
| NMO 100 PMP 48v | 6 | 52.8 | 316.8 | 100 |
| NMO 100 PM 48v | 6 | 52.8 | 316.8 | 100 |

Section View Tube Line




Technical Details

Tube Line Multi Track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimensions (mm) |
|------------------|-----------|-----------------|--------------------|-----------------|
| NTL 580 PMT 48v | 17 | 99.2 | 1687 | 580 |
| NTL 860 PMT 48v | 26 | 97.1 | 2527 | 860 |
| NTL 1140 PMT 48v | 33 | 102.2 | 3374 | 1140 |

Section View Lenza Multi Track Adjustable Lenza Multi Track

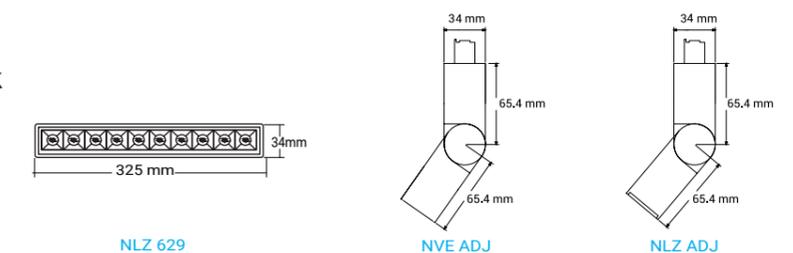

Technical Details

Lenza Multi Track


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimensions (mm) |
|--------------------|-----------|-----------------|--------------------|-----------------|
| NLZ 32 ... PCT 48v | 15 | 100 | 1500 | 325x34x47 |

Adjustable Lenza Multi Track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimensions (mm) |
|-----------------------|-----------|-----------------|--------------------|-----------------|
| NVE ADJ 40 30 PCT 48v | 17.8 | 94.7 | 1687 | 295x34x82 |
| NLZ ADJ 32 PCT 48v | 15 | 100 | 1500 | 325x34x82 |

Section View

Melody




Technical Details

Melody Multi Track

| Reference | load (w) | Impedence (Ω) | Covering range (m) | Dimension (mm) |
|--------------------|----------|---------------|--------------------|----------------|
| NMEL 70 10 ALT 48v | 10 | 4 | 10 m | Ø70 x 105 mm |

Section View

Perfume

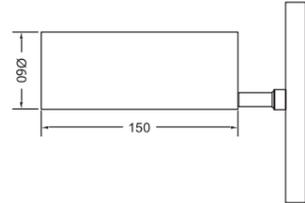


Technical Details

Perfume Multi Track

| Reference | load (w) | Dimension (mm) |
|--------------------|----------|----------------|
| NPE 65 150 ALT 48v | 2 | Ø65 x 150 |

Section View

Pointer

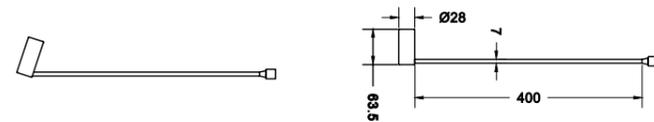


Technical Details

Pointer Multi Track

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Diameter (mm) |
|-------------------|-----------|-----------------|--------------------|------|---------------|
| NPO 28 36 PCT 48v | 6 | 83 | 500 | 30° | Ø28 |

Section View


Duke

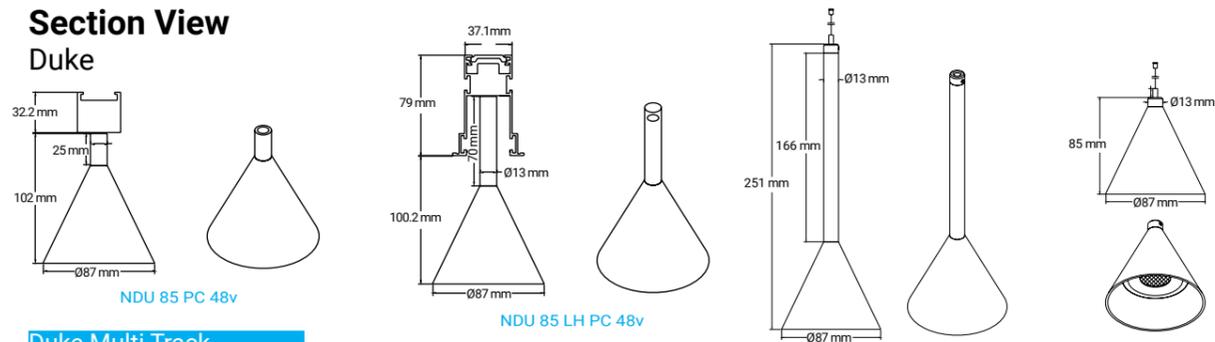

Duke Multi Track

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|------------------|-----------|-----------------|--------------------|------|----------------|
| NDU 87 PCP 48v | 6 | 101.6 | 610 | 36° | Ø87 x 251 |
| NDU 87 PC 48v | 6 | 101.6 | 610 | 36° | Ø87 x 179.2 |
| NDU 87 LH PC 48v | 6 | 101.6 | 610 | 36° | Ø87 x 134.2 |

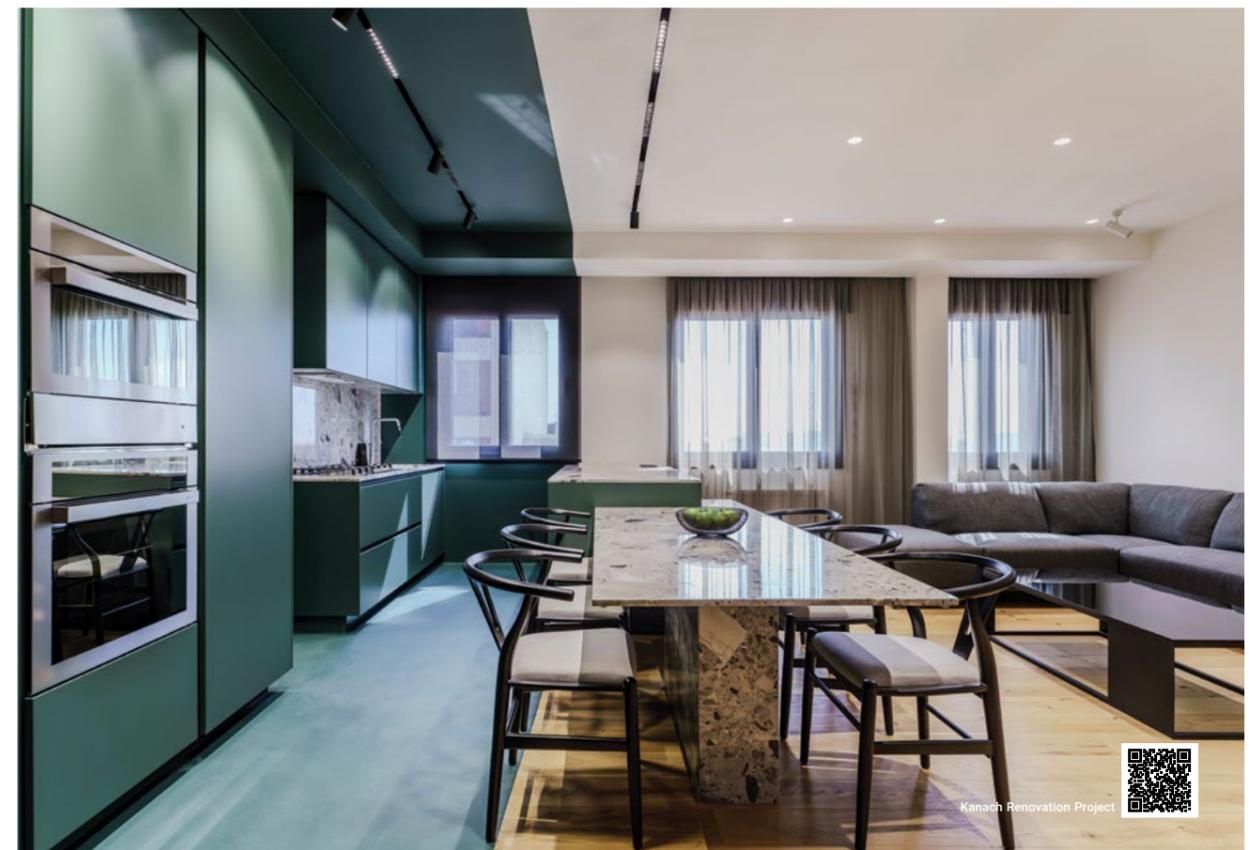

GLORY TRACK SYSTEM




MAGNETIC CONNECTION

Glory system is made of brass material in gold, black, rosegold colors and with the possibility of surface and pendant installation on any type of ceiling. In Glory system, due to the unlimited arrangement of the rails, you can install any number of different lighting sources with magnetic technology, and according to the type of arrangement of the objects in the space, you can easily change the lighting system and experience different lighting.







GLORY TRACK SYSTEM

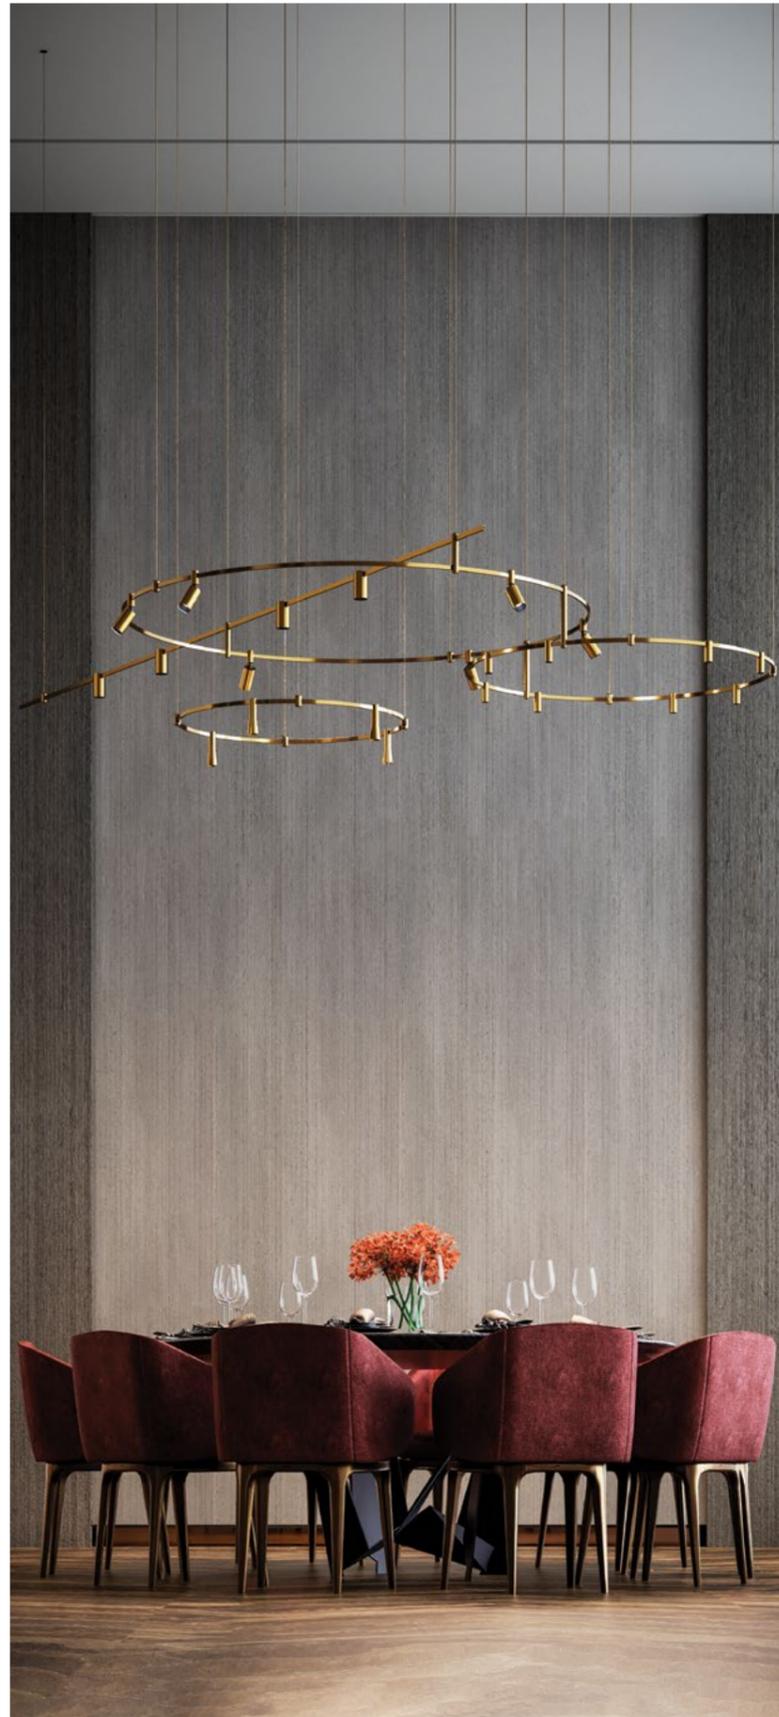

A WIDE RANGE OF LUMINAIRES

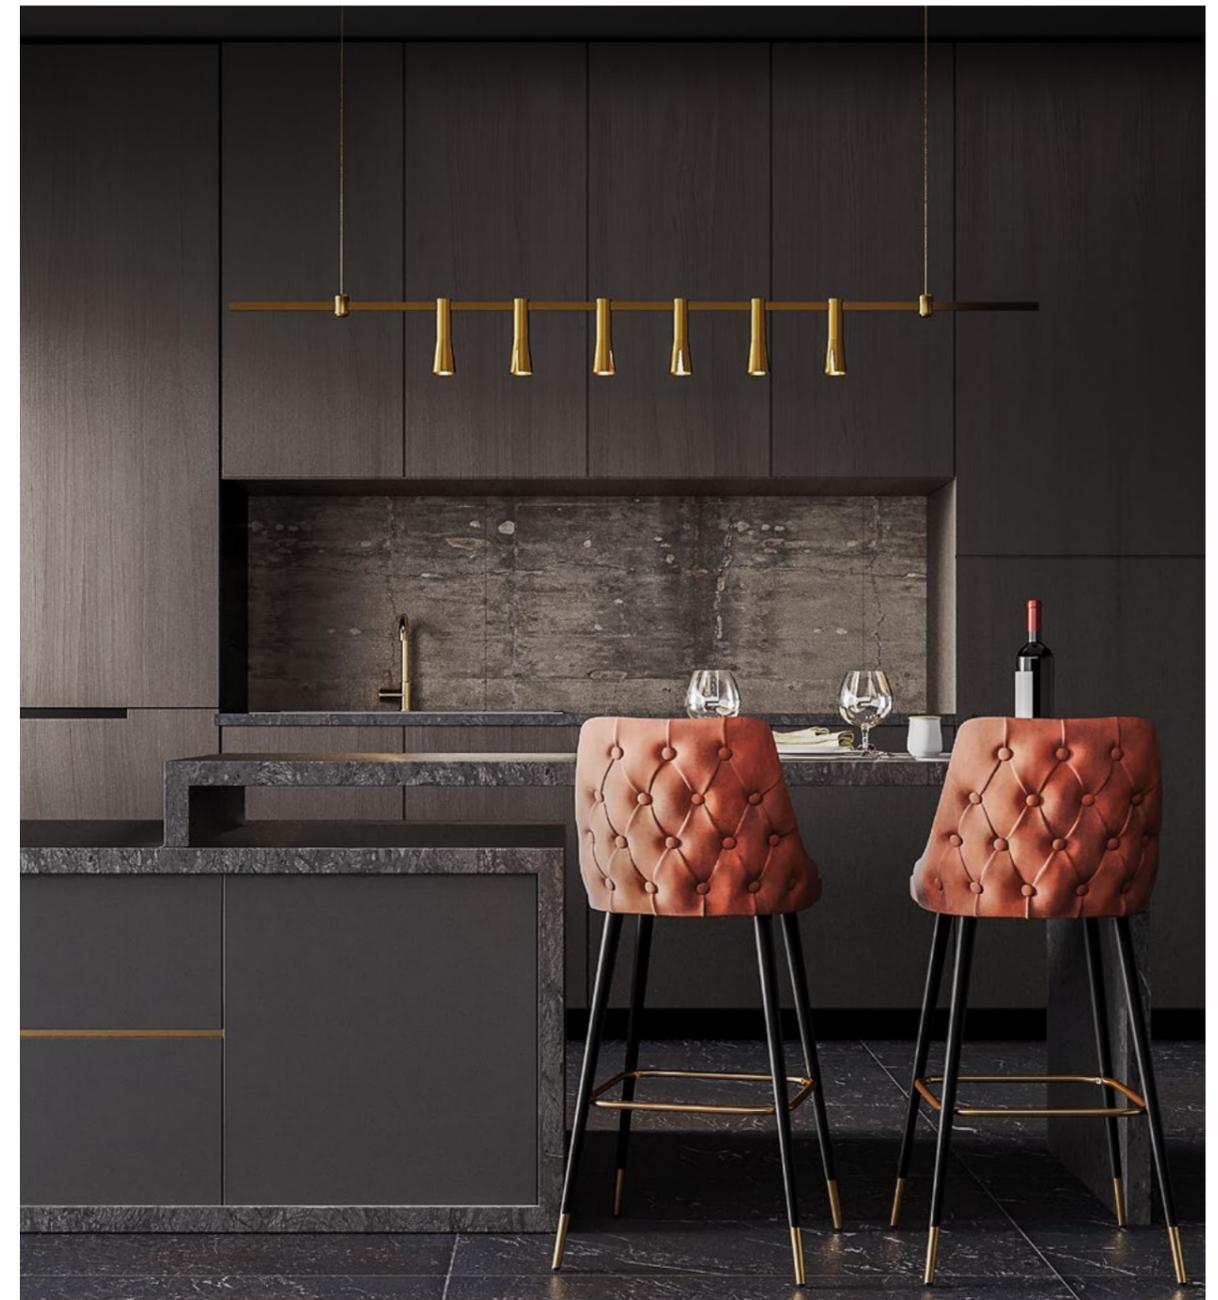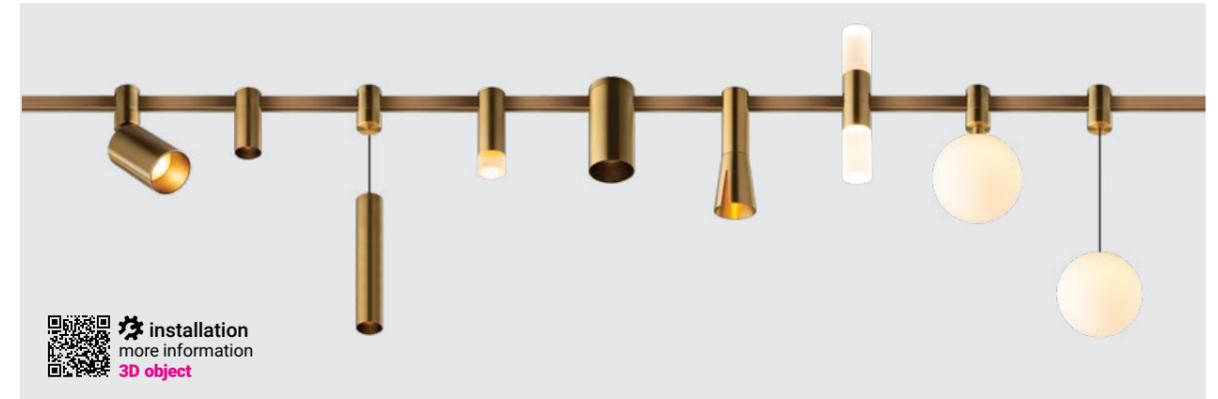

INSTALLATION EXAMPLES




GLORY FINISHES

Brass made with a range of anodized coating



installation
more information
3D object

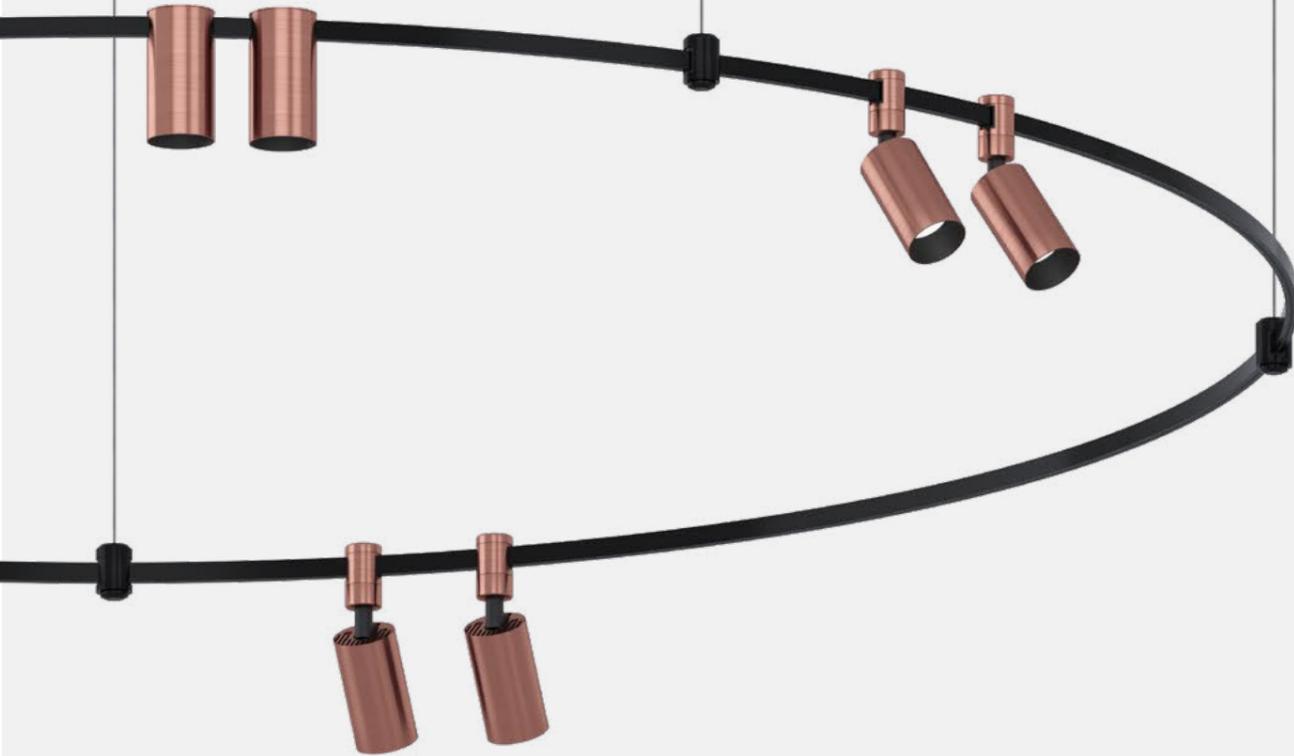

Pendant and Surface-mounted connectors with customizable height with single or double structure



GLORY SYSTEM



Infinite Configurations

Glory tracks can be manufactured in straight lines and curved shapes, using double connections make it possible to create unlimited crossing shapes.


GLORY SYSTEM FEATURES




MAGNETIC CONNECTION

48V Low-Voltage Track System

The Glory lighting system features a magnetic connection that allows various types of light fixtures to be easily installed on the track in any quantity. This flexible setup makes it simple to adjust the lighting arrangement at any time—whether to suit changes in interior layout or personal preference—offering a dynamic and customizable lighting experience.

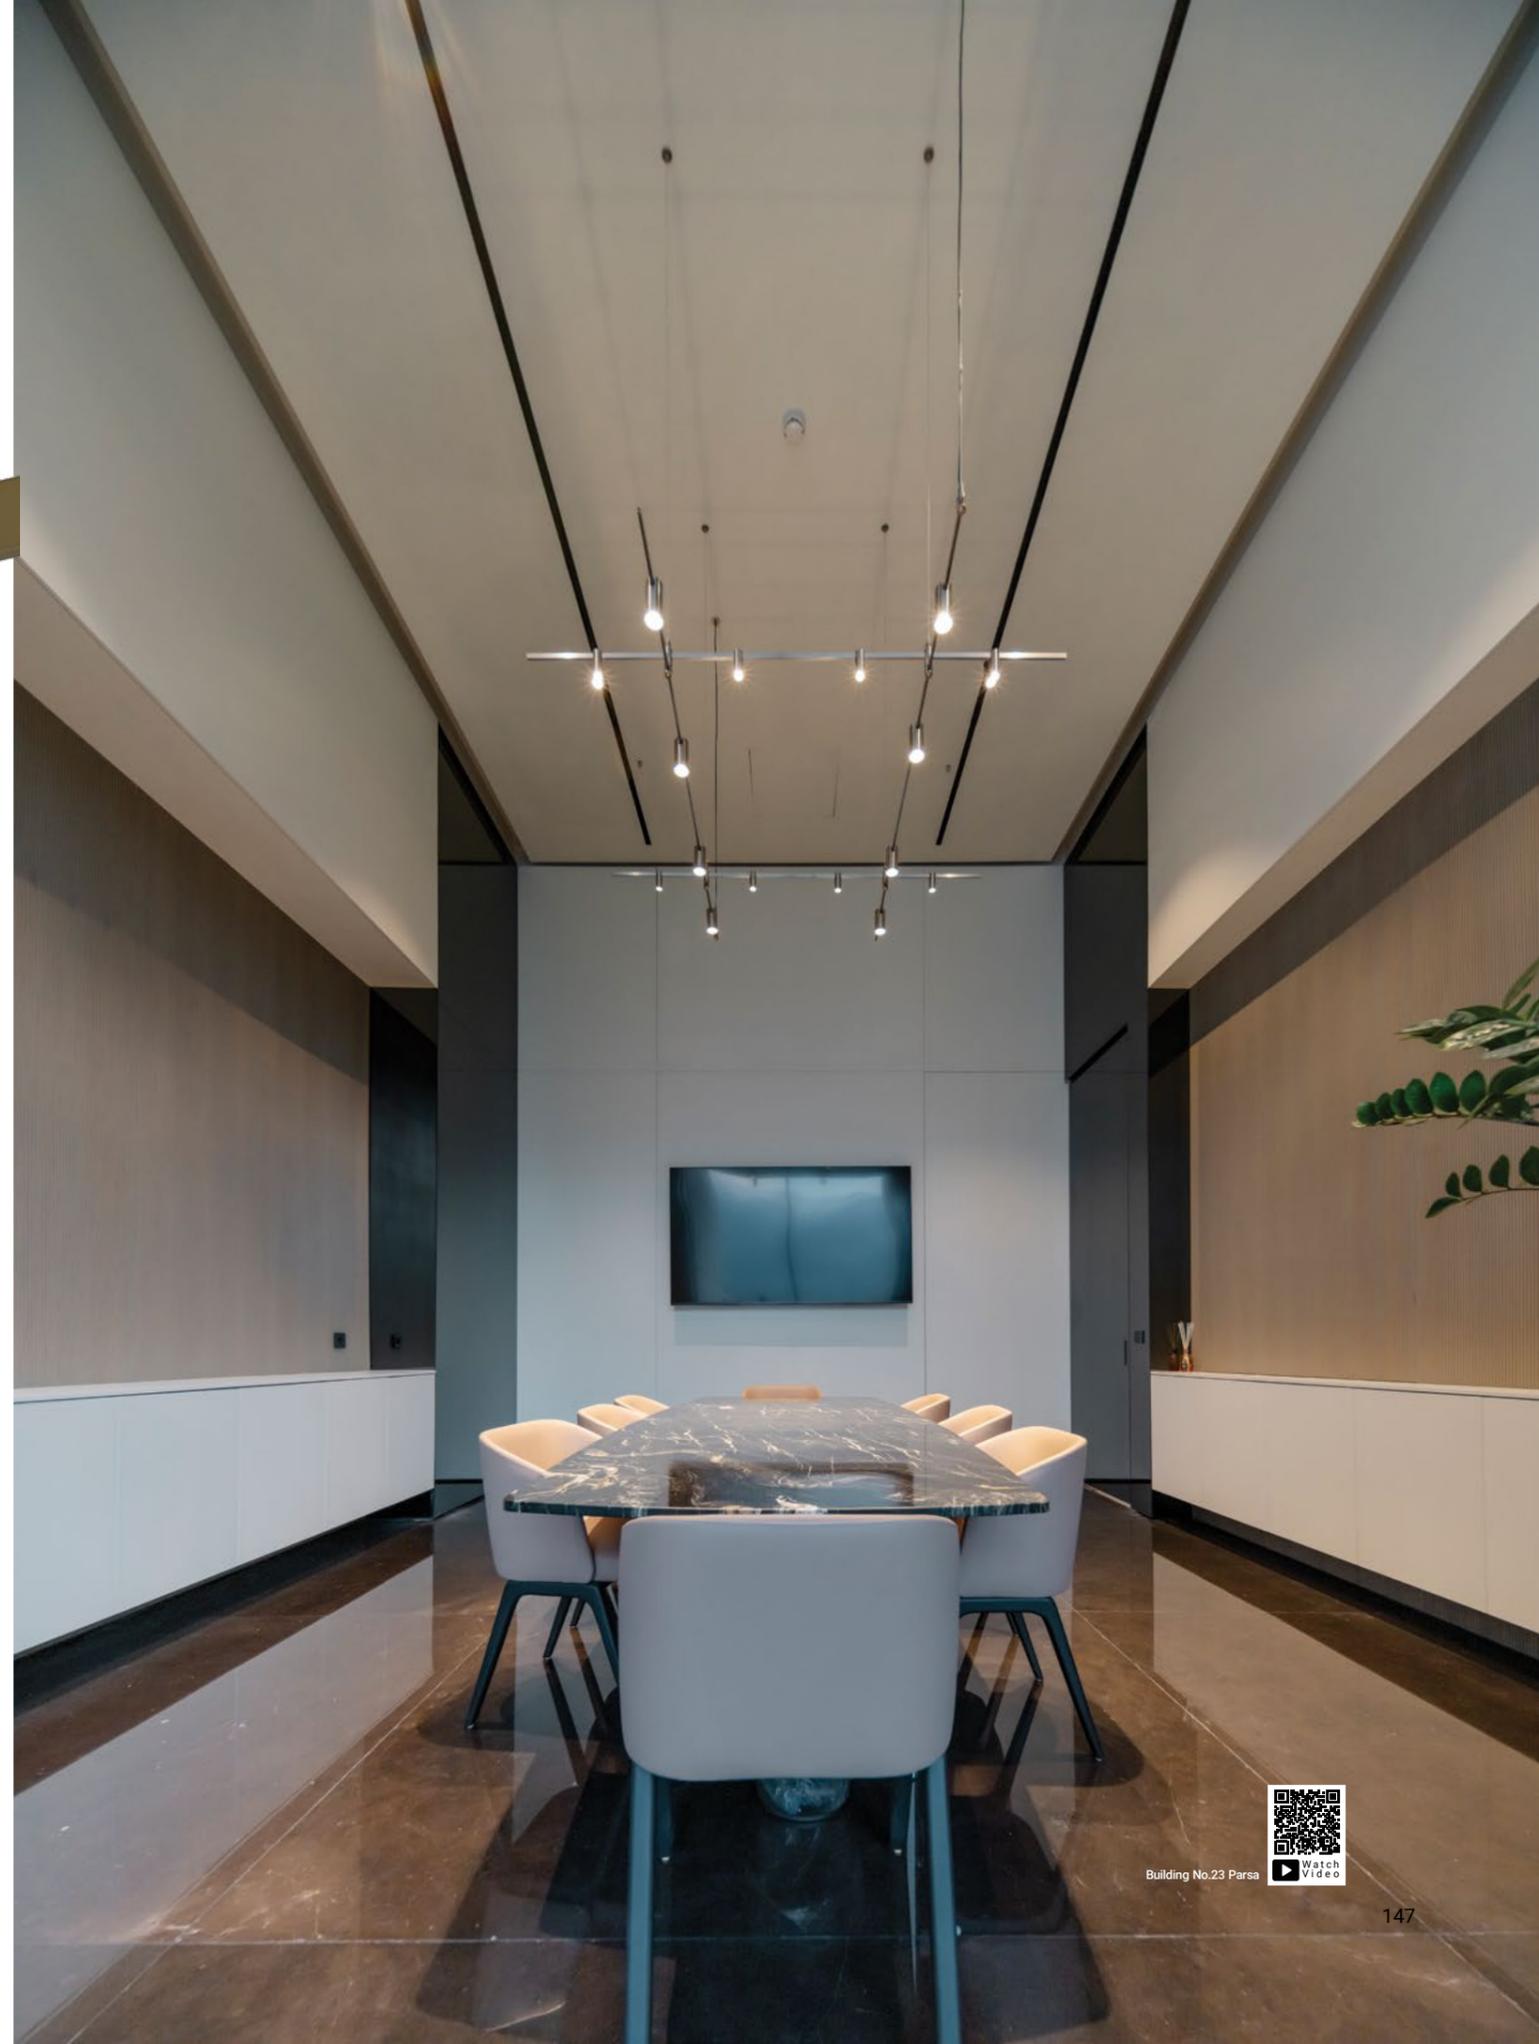


INSTALLATION EXAMPLES

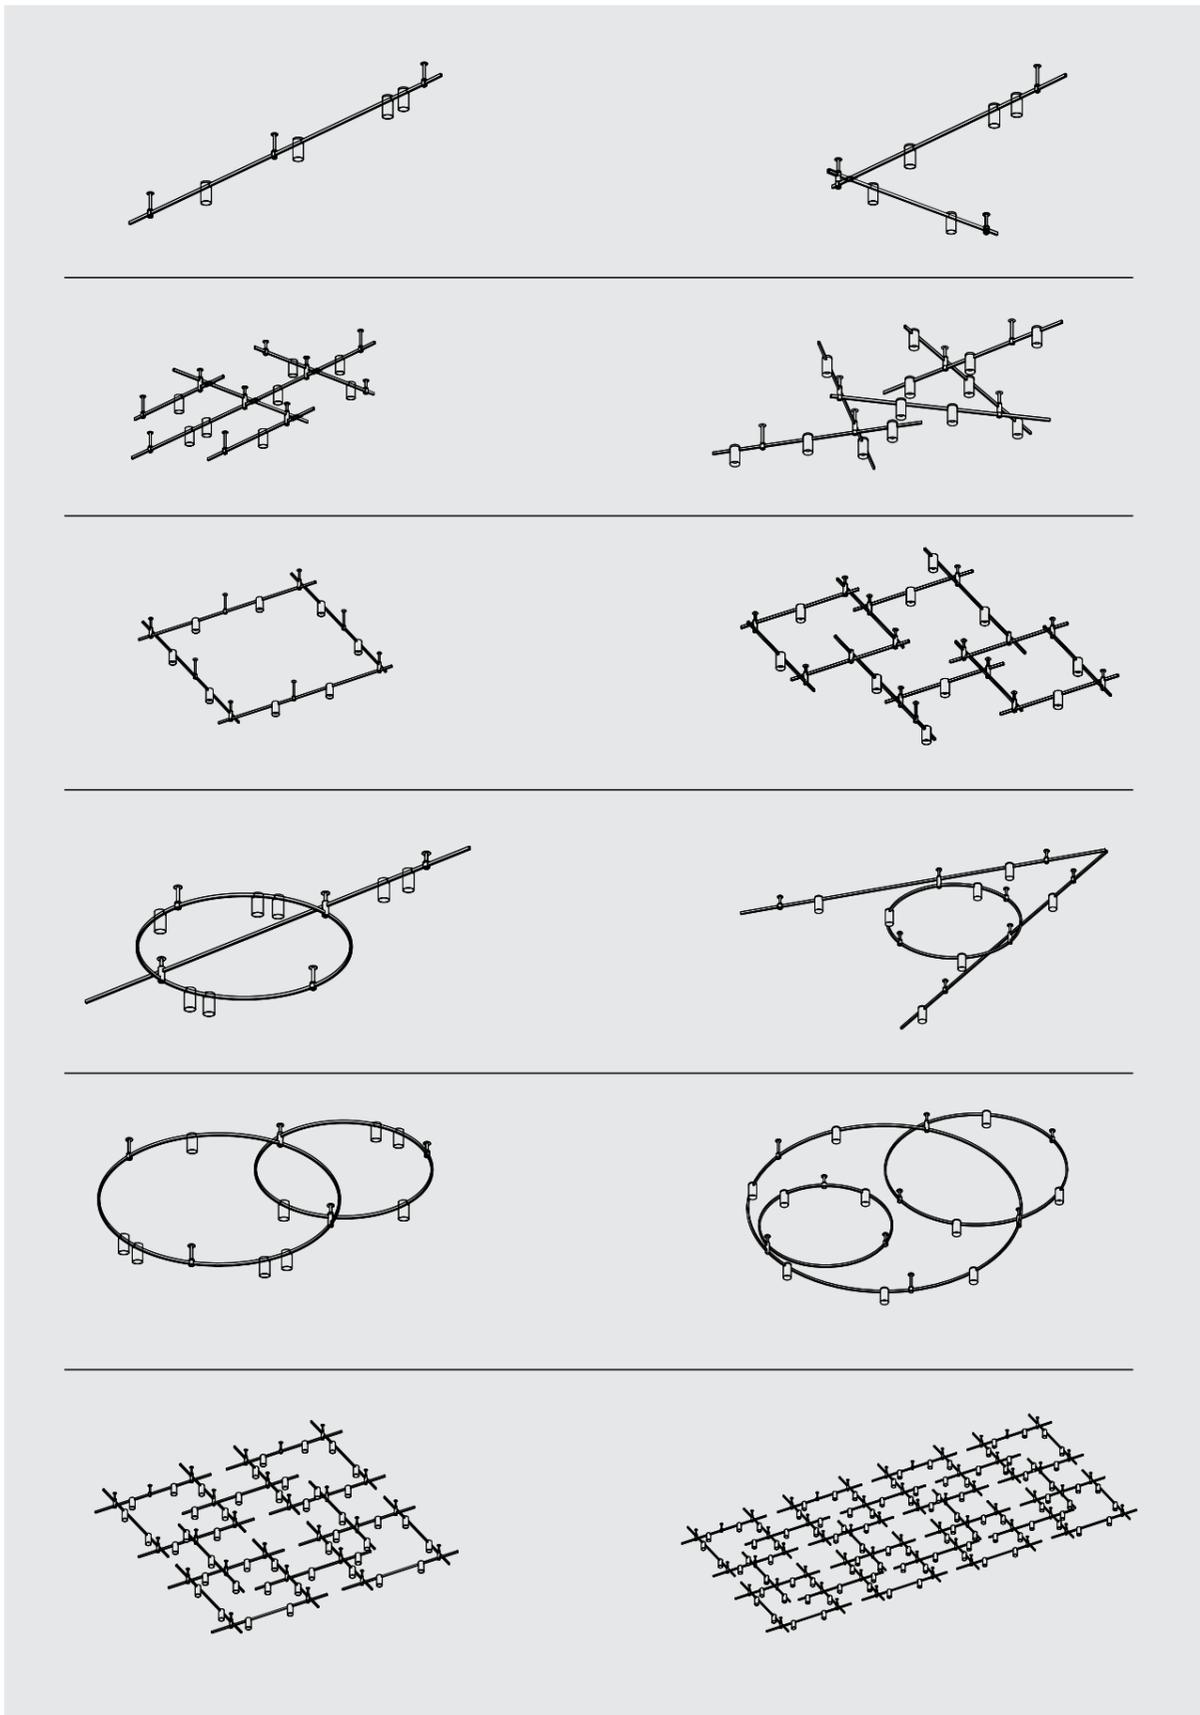

GLORY SYSTEM

Section View

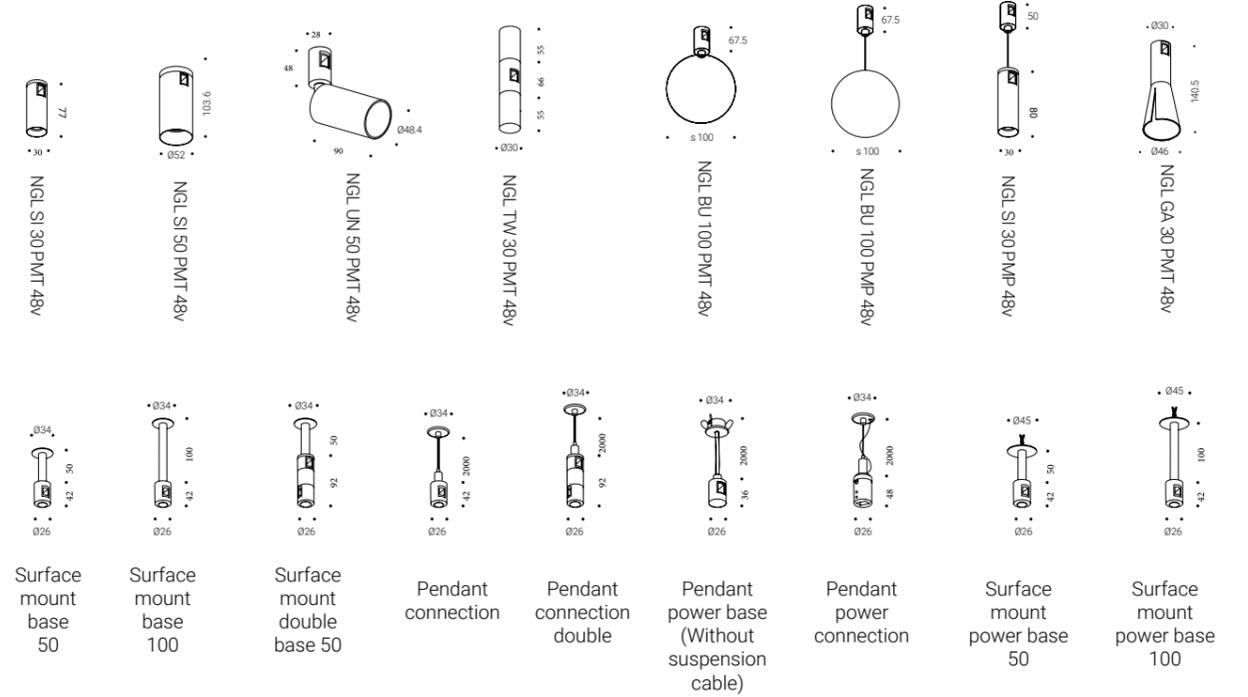

Technical Details


Glory System luminaires

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimensions (mm) |
|------------------------|-----------|-----------------|--------------------|-----------------|
| NGL UN 50 PMT 48v | 10 | 71.9 | 719 | Ø48.4 x 90 |
| NGL SI 30 PMT/PMP 48v | 4 w | 78.7 | 315 | Ø30 x 77 |
| NGL SI 50 PMT/PMP 48v | 10 | 71.9 | 719 | Ø52 x 103.6 |
| NGL BU 100 PMT/PMP 48v | 4 | 67.5 | 270 | Ø100 x 167.5 |
| NGL GA 30 PMT 48v | 4 | 55.5 | 222 | Ø46 x 140.5 |
| NGL TW 30 PMT 48v | 8 | 67 | 536 | Ø30 x 176 |
| NGL SI 30 PMP 48v | 4 | 78.7 | 315 | Ø30 x 80 |
| NGL BU 100 PMP 48v | 4 | 67.5 | 270 | Ø100 |



installation
more information

LINK SYSTEM

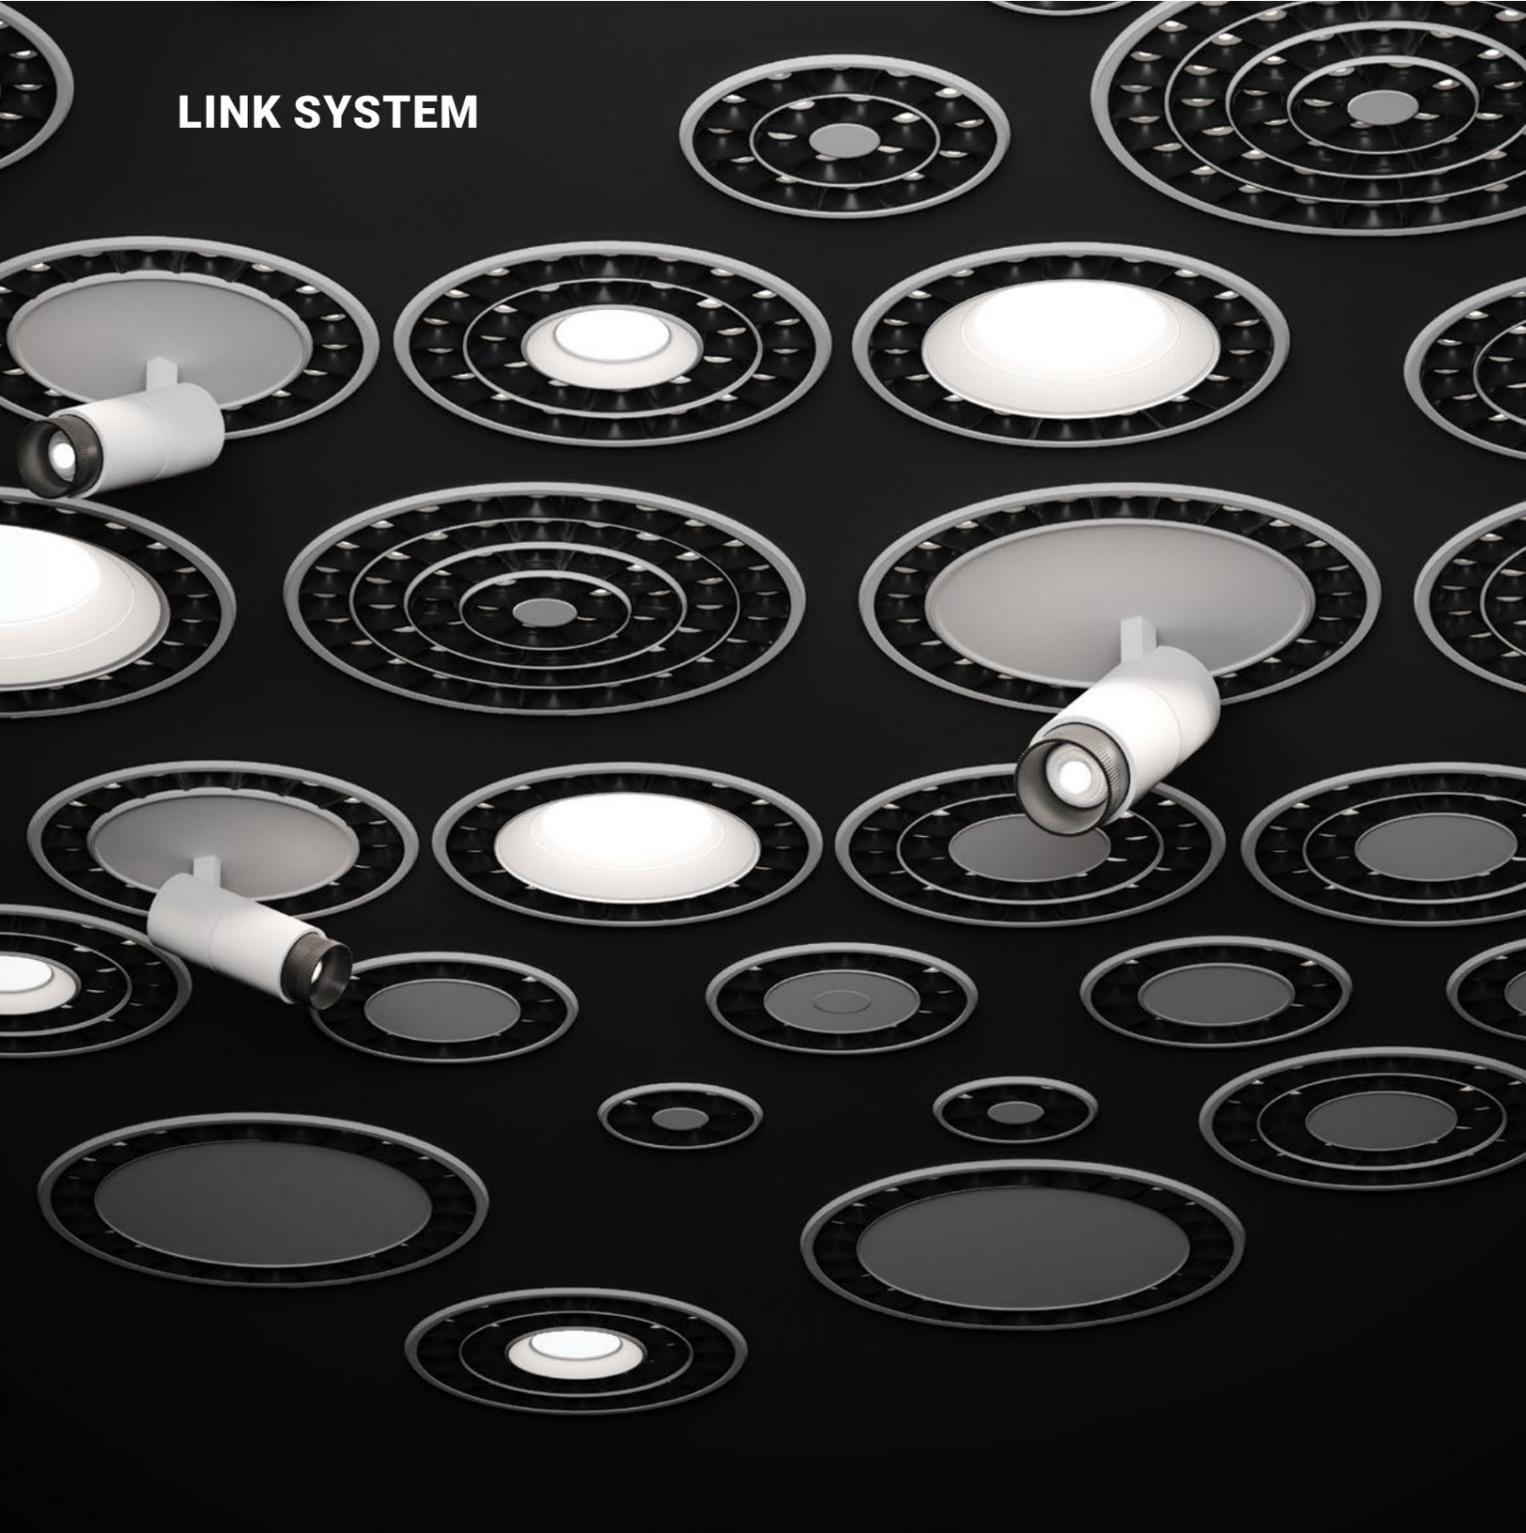


Link is a dark-light lighting system with a unique modular design. In addition to providing general illumination, it offers the flexibility to integrate accent lighting, downlights, and spotlights, as well as to combine with cameras, speakers, detectors, and other smart components.

LINK SYSTEM



-  Ø205 mm | 20 w | 2100 lm
-  Ø160 mm | 20 w | 2100 lm
-  Ø115 mm | 15 w | 1575 lm
-  Ø70 mm | 8 w | 840 lm
-  **Link in**
8 - 20 w | 840 - 2100 lm
-  **Echo Link**
7 - 15 w | 665 - 1425 lm
-  **Zoom Link**
3 - 12 w | 330 - 1320 lm
-  **Point Link**
7 - 20 w | 700 - 2000 lm
-  **Smoke detector**
Ø160 / 115 mm
-  **CCTV Camera**
Ø160 / 115 mm
-  **Speaker**
Ø160 / 115 mm
-  **Vent**
Ø160 / 115 / 70 mm

  **installation**
more information
3D object

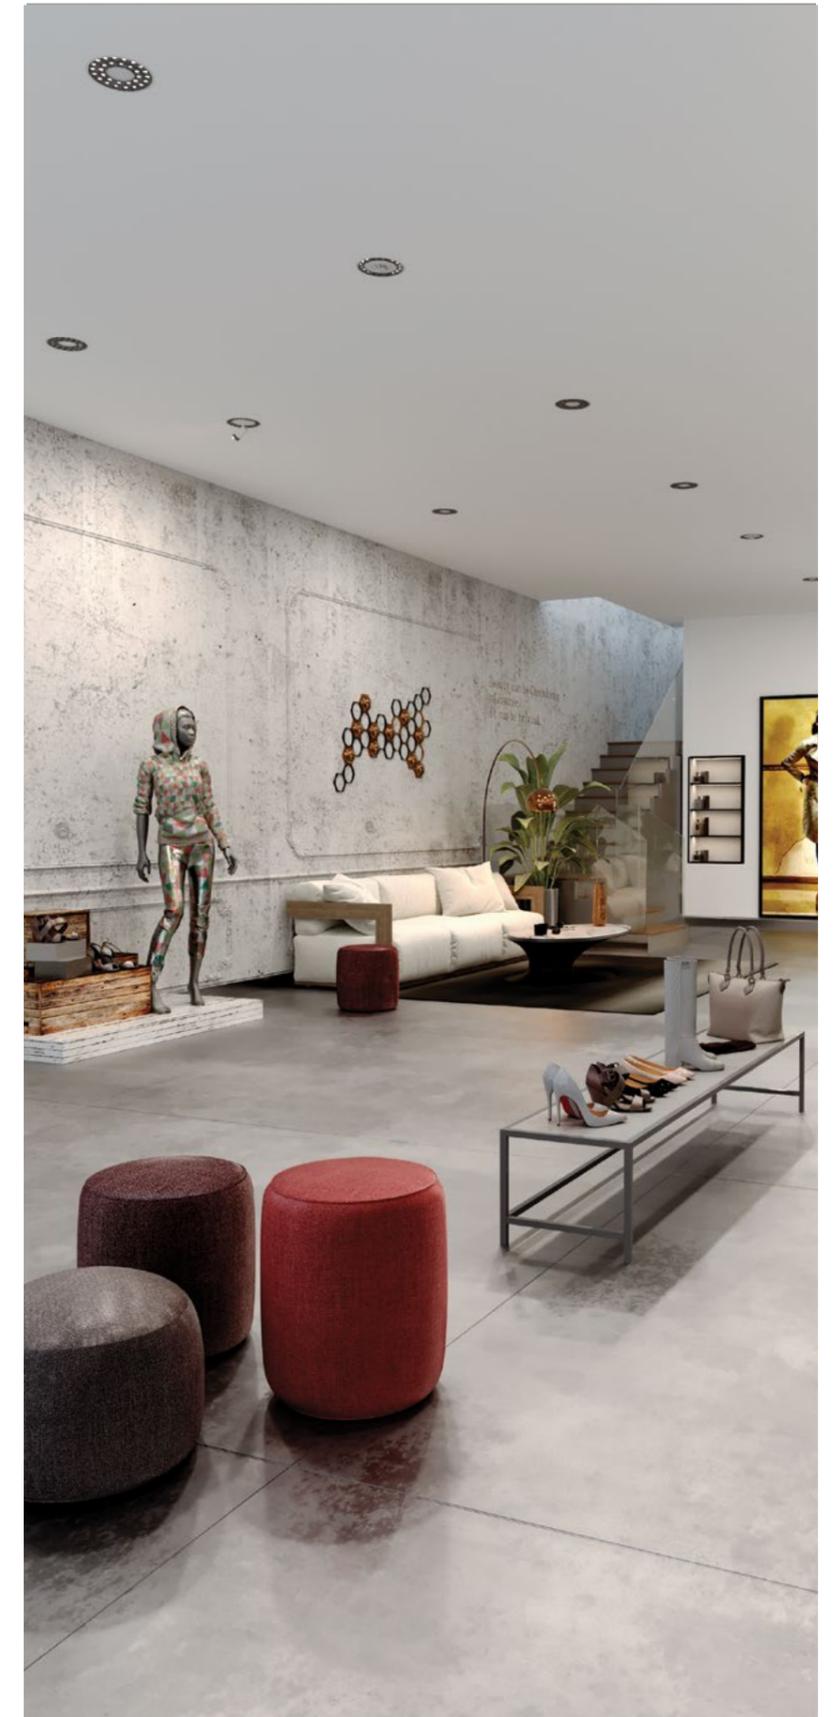

LINK SYSTEM FEATURES



ORDER AND CHAOS!

Perfectly bringing together elements on ceilings, the Link System creates order and simplicity in projects and prevent visual distortion.



Controlling light sources individually

In Link system, the integrated light sources can be controlled individually.

















Dimmability

The light intensity of all light sources in Link system can be adjusted by connecting to the smart system or separately using a smartphone.

LINK SYSTEM TECHNICAL DETAILS

Section View

NINK M ... PMI



NINK P ... PMLI

NINK D ... PMLI

NINK Z ... PMLI

NINK L ... PMLI

LINK

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Cutting (mm) |
|-------------------|-----------|-----------------|--------------------|---------|--------------|
| NINK M 67 35 PMI | 8 | 105 | 840 | 35° SYM | Ø 75 mm |
| NINK M 112 35 PMI | 15 | 105 | 1575 | 35° SYM | Ø 120 mm |
| NINK M 156 35 PMI | 20 | 105 | 2100 | 35° SYM | Ø 165 mm |
| NINK M 202 35 PMI | 20 | 105 | 2100 | 35° SYM | Ø 205 mm |

LINKin

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM |
|--------------------|-----------|-----------------|--------------------|---------|
| NINK L 70 35 PMLI | 8 | 105 | 840 | 35° SYM |
| NINK L 115 35 PMLI | 15 | 105 | 1575 | 35° SYM |
| NINK L 160 35 PMLI | 20 | 105 | 2100 | 35° SYM |

ZOOM LINK

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM |
|-------------------|-----------|-----------------|--------------------|---------------|
| NINK Z 70 S PMLI | 3 | 110 | 330 | 20° - 50° SYM |
| NINK Z 115 S PMLI | 8 | 110 | 880 | 20° - 50° SYM |
| NINK Z 160 S PMLI | 12 | 110 | 1320 | 20° - 50° SYM |

ECHO LINK

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM |
|-----------------|-----------|-----------------|--------------------|----------|
| NINK D 70 PMLI | 7 | 95 | 665 | Diffused |
| NINK D 115 PMLI | 10 | 95 | 950 | Diffused |
| NINK D 160 PMLI | 15 | 95 | 1425 | Diffused |

POINT LINK

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM |
|-----------------|-----------|-----------------|--------------------|---------|
| NINK P 70 PMLI | 7 | 100 | 700 | 24° SYM |
| NINK P 115 PMLI | 12 | 100 | 1200 | 24° SYM |
| NINK P 160 PMLI | 20 | 100 | 2000 | 24° SYM |


CANAL SYSTEM



The «Canal system» was created with the line & dot arrangement idea in modern architecture.

The system creates an effect of continuous and dark line in the ceiling due to an extruded profile suitable for false ceilings with internal wiring, and also a variety of linear lights, spot lights, ... , can be installed on this system.

CANAL SYSTEM

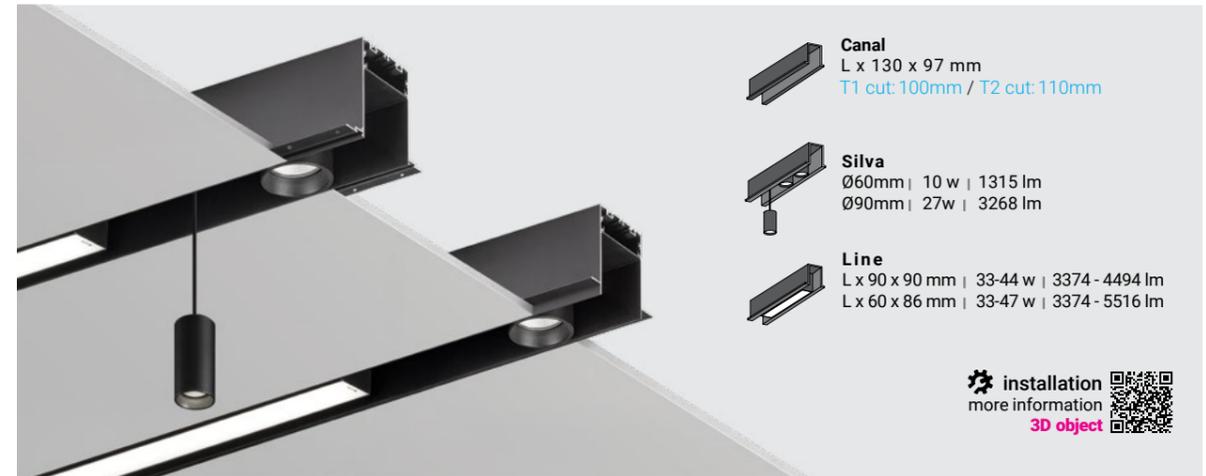


SPOTLINE SYSTEM



The combination of linear lighting and spotlights is a modern solution for providing both general and accent lighting at the same time. Spotline system is an easy way of accomplishing that purpose, available in recessed, surface mounted and pendant mode.

SPOTLINE SYSTEM

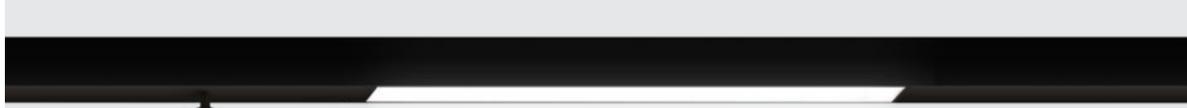

Line Recessed
 NL 60 : L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m cut: 65mm
 NL 90 : L x 90 x 90 mm | up to 41 w/m | up to 4855 lm/m cut: 95mm

Line Recessed Trimless
 NL 60 : L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m cut: 62mm
 NL 90 : L x 90 x 90 mm | up to 41 w/m | up to 4855 lm/m cut: 92mm

Line
 NL 60 : L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m
 NL 90 : L x 90 x 90 mm | up to 41 w/m | up to 4855 lm/m

Unique
 NU 60 PCL : Ø 60 mm | up to 10 w | up to 1230 lm
 NU 90 PCL : Ø 90 mm | 27 w | 3268 lm


 **installation**
 more information
3D object



Women's gym 

CANAL


Section View Profile

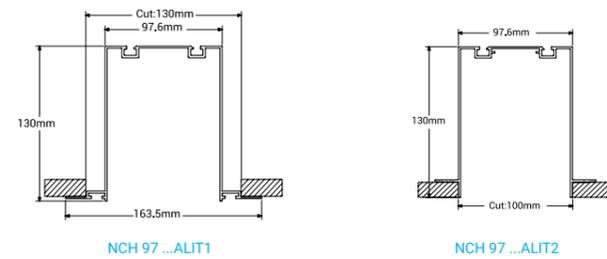

Technical Details

| Reference | Dimension (mm) |
|------------------|-----------------|
| NCH 97 ... ALIT1 | L x 163.5 x 130 |
| NCH 97 ... ALIT2 | L x 97.6 x 130 |

Section View Silva

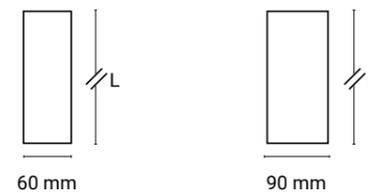

Technical Details

SILVA CANAL

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|-------------------|-----------|-----------------|--------------------|-------------------|----------------|
| NS 60 PC/PCP (H1) | 5.5 (10) | 80.5 (123) | 433 (1230) | 20°/ 30°/ 50° SYM | Ø60 x L |
| NS 90 PC/PCP (H1) | 10 (27) | 121 (131) | 1315 (3268) | 20°/ 32°/ 60° SYM | Ø90 x L |

Section View Line



Technical Details

LINE CANAL


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|----------------------|-----------|-----------------|--------------------|----------------|
| NL 60 114 PM CH (H1) | 33 (44) | 100 (101) | 3374 (4495) | 1140x60x86 |
| NL 90 114 PM CH (H1) | 33 (47) | 100 (115) | 3374 (5516) | 1140x90x90 |



Watch Video
installation

SPOTLINE

Section View

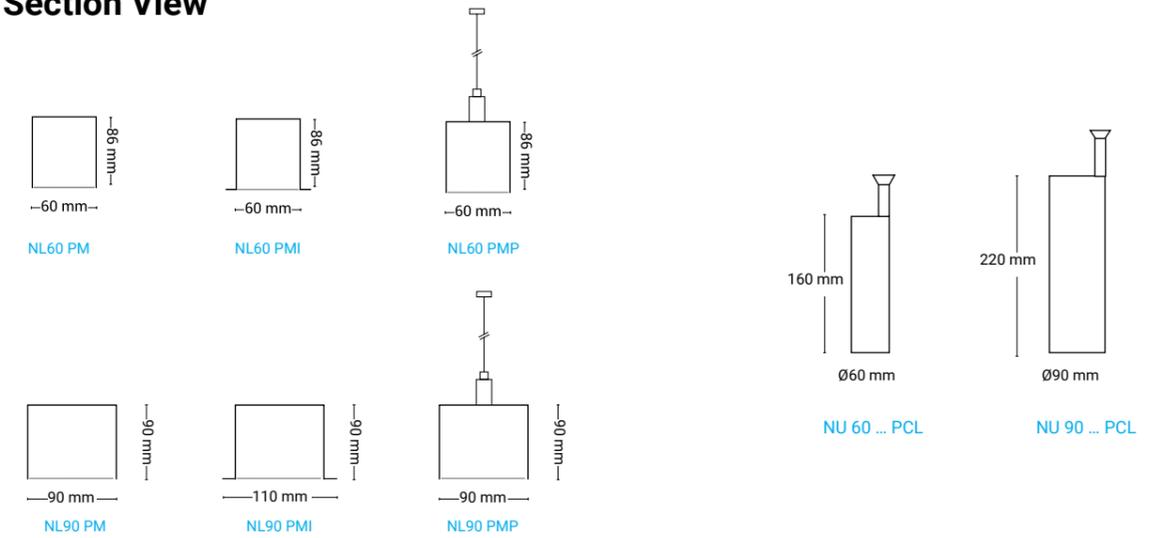

Technical Details

UNIQUE

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|---------------------|-----------|-----------------|--------------------|-------------------|----------------|
| NU 60 20 R PCL (H1) | 5.5 (10) | 80.5 (123) | 433 (1230) | 20°/ 30°/ 50° SYM | Ø60x100 |
| NU 90 60 R PCL | 27 | 121 | 3268 | 20°/ 32°/ 60° SYM | Ø90x200 |

LINE

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|-----------------------------|-------------|-----------------|--------------------|----------------|
| NL 60 114 ◊ PM/PMP/PMI (H1) | 33.6 (44.2) | 100 (101) | 3374 (4495) | L x 60 x 60 |
| NL 60 171 ◊ PM/PMP/PMI (H1) | 49.4 (65.3) | 102 (103) | 5061 (6741) | L x 60 x 60 |
| NL 60 227 ◊ PM/PMP/PMI (H1) | 65.2 (86.4) | 103 (104) | 6748 (8988) | L x 60 x 60 |
| NL 60 284 ◊ PM/PMP/PMI (H1) | 81 (107.5) | 104 (104) | 8435 (11235) | L x 60 x 60 |

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|-----------------------------|-------------|-----------------|--------------------|----------------|
| NL 90 114 ◊ PM/PMP/PMI (H1) | 33.6 (47.6) | 100.42 (115.88) | 3374 (5516) | L x 90 x 90 |
| NL 90 171 ◊ PM/PMP/PMI (H1) | 49.4 (70.4) | 102.45 (117.53) | 5061 (8274) | L x 90 x 90 |
| NL 90 227 ◊ PM/PMP/PMI (H1) | 65.2 (93.2) | 103.50 (118.37) | 6748 (11032) | L x 90 x 90 |
| NL 90 284 ◊ PM/PMP/PMI (H1) | 81 (116) | 104.14 (118.88) | 8435 (13790) | L x 90 x 90 |




Watch Video
installation

LINEAR LUMINAIRES

INSTALLATION TYPES



INSTRUCTURE

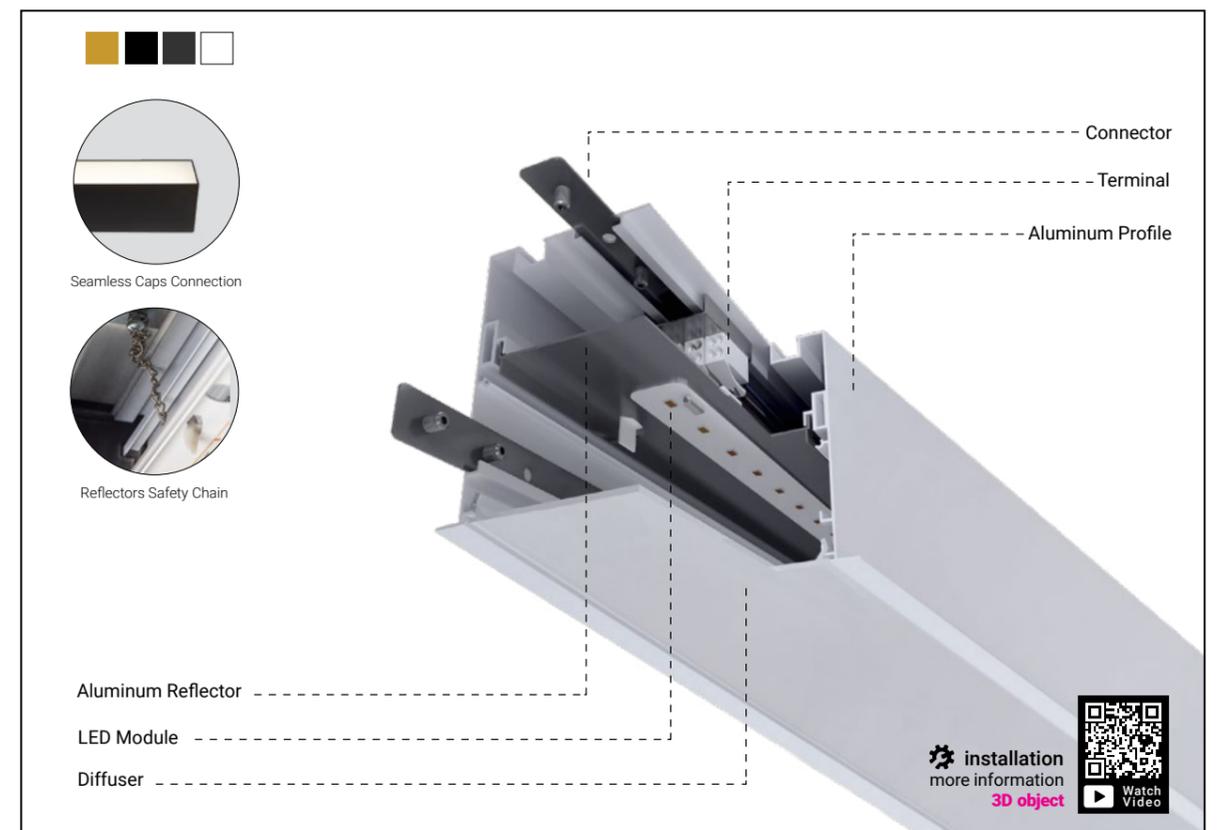

PROLINE






NPL ... PMD
L x 86 x 43.7 mm | 40 w/m | 4915 lm/m

Proline Luminare

Specially designed for targeted lighting of work places and office spaces with limited glare (UGR<19)
Features a unique optical system that provides both direct and indirect lighting simultaneously
Independent control of each side of the light
Indirect lighting provided by Bat-wing lenses for broader and more uniform ceiling coverage
Direct lighting with lenses and glare-reducing shaders with


installation
more information
3D object

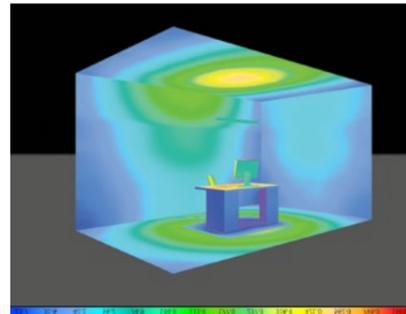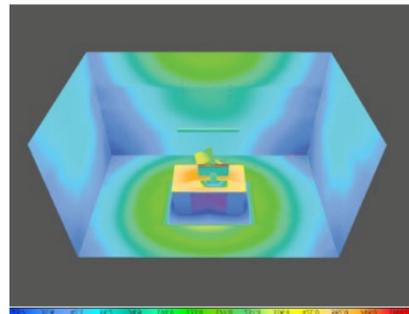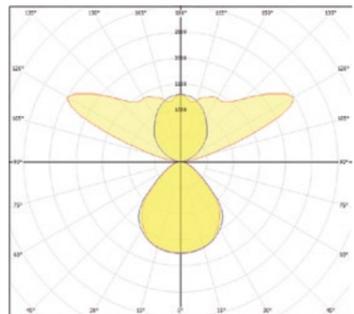



Proline is a modern linear light with adjustable light direction, enabling it to be used as a downlight, an uplight (for indirect illumination), or a combination of both. This versatility makes Proline an excellent choice for office environments.

ARC LINE

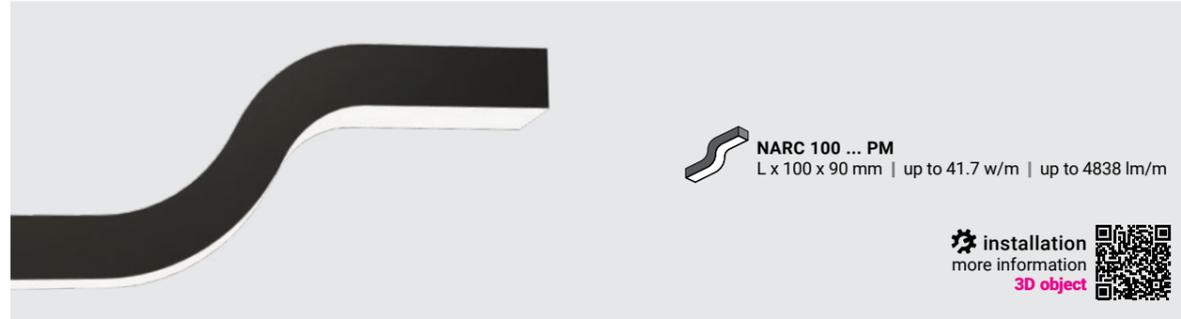

Features

- IP44 protection rating against moisture and dust, suitable for outdoor spaces (thanks to the use of a special integrated, sealed diffuser), introduced for the first time in Iran
- Integrated click-on diffusers with production capability up to 30 meters in length
- Full aluminum profile body with the option of custom manufacturing in curved forms along the Z-axis, for the first time in Iran and even the Middle East



LINE SURFACE MOUNT




NL 90 PM
L x 90 x 90 mm | up to 41w/m | up to 4855 lm/m


NL 60 PM
L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m

NL 30 PC
L x 35 x 86 mm | up to 29 w/m | up to 2970 lm/m

 **installation**
more information
3D object

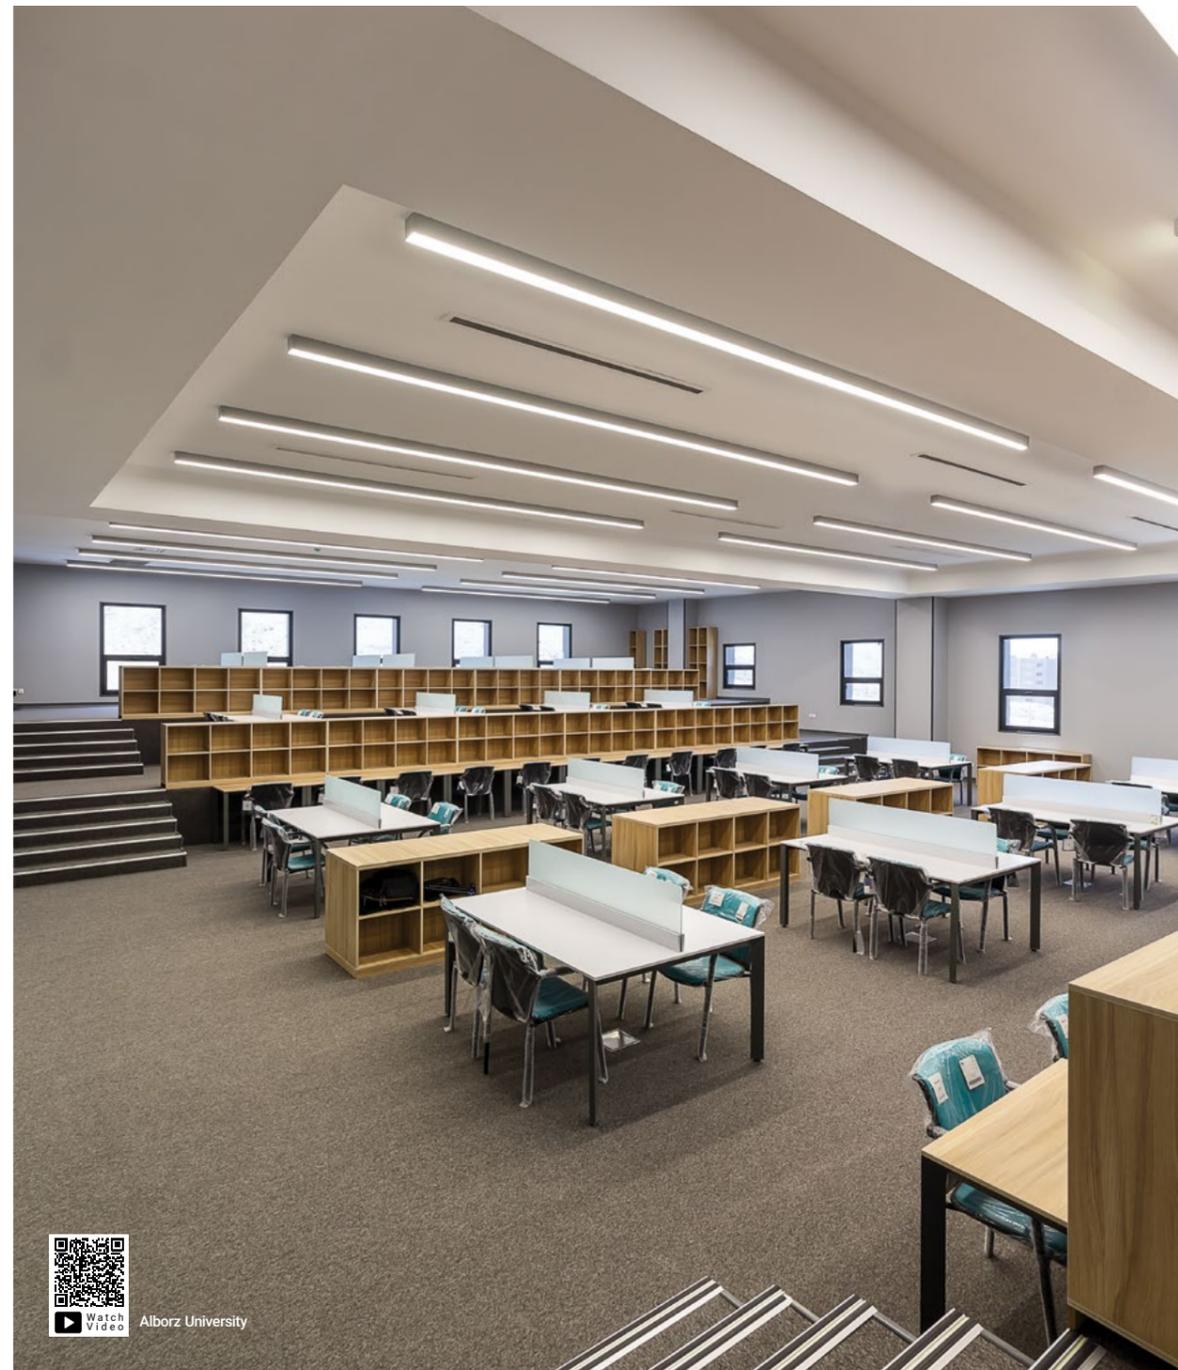

LINE PENDANT

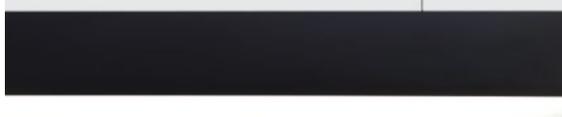


NL 90 PMp
L x 90 x 90 mm | up to 41w/m | up to 4855 lm/m

NL 60 PMp
L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m

NL 30 PCp
L x 35 x 86 mm | up to 29 w/m | up to 2970 lm/m

 **installation**
more information
3D object

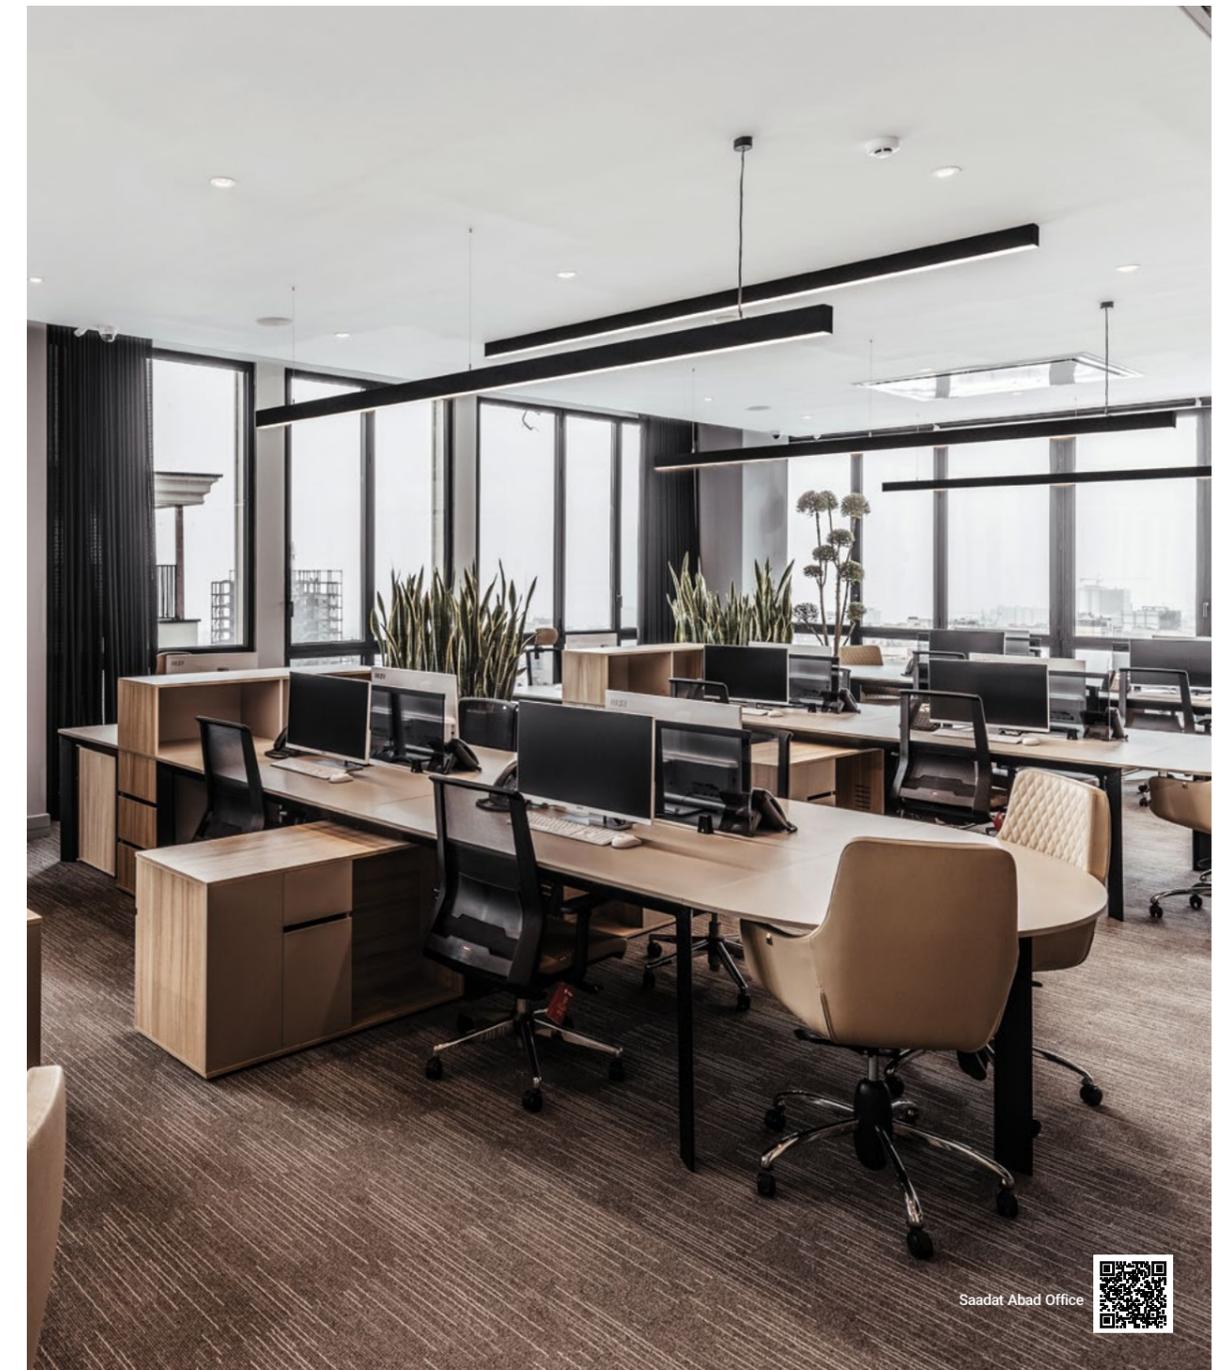

LINE RECESSED




 **NL 90 PMi**
L x 90 x 90 mm | up to 41w/m | up to 4855 lm/m
cut: 95mm

 **NL 60 PMi**
L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m
cut: 65mm

 **NL 30 PCi**
L x 35 x 86 mm | up to 29 w/m | up to 2970 lm/m
cut: 40mm

 **installation**
more information
3D object

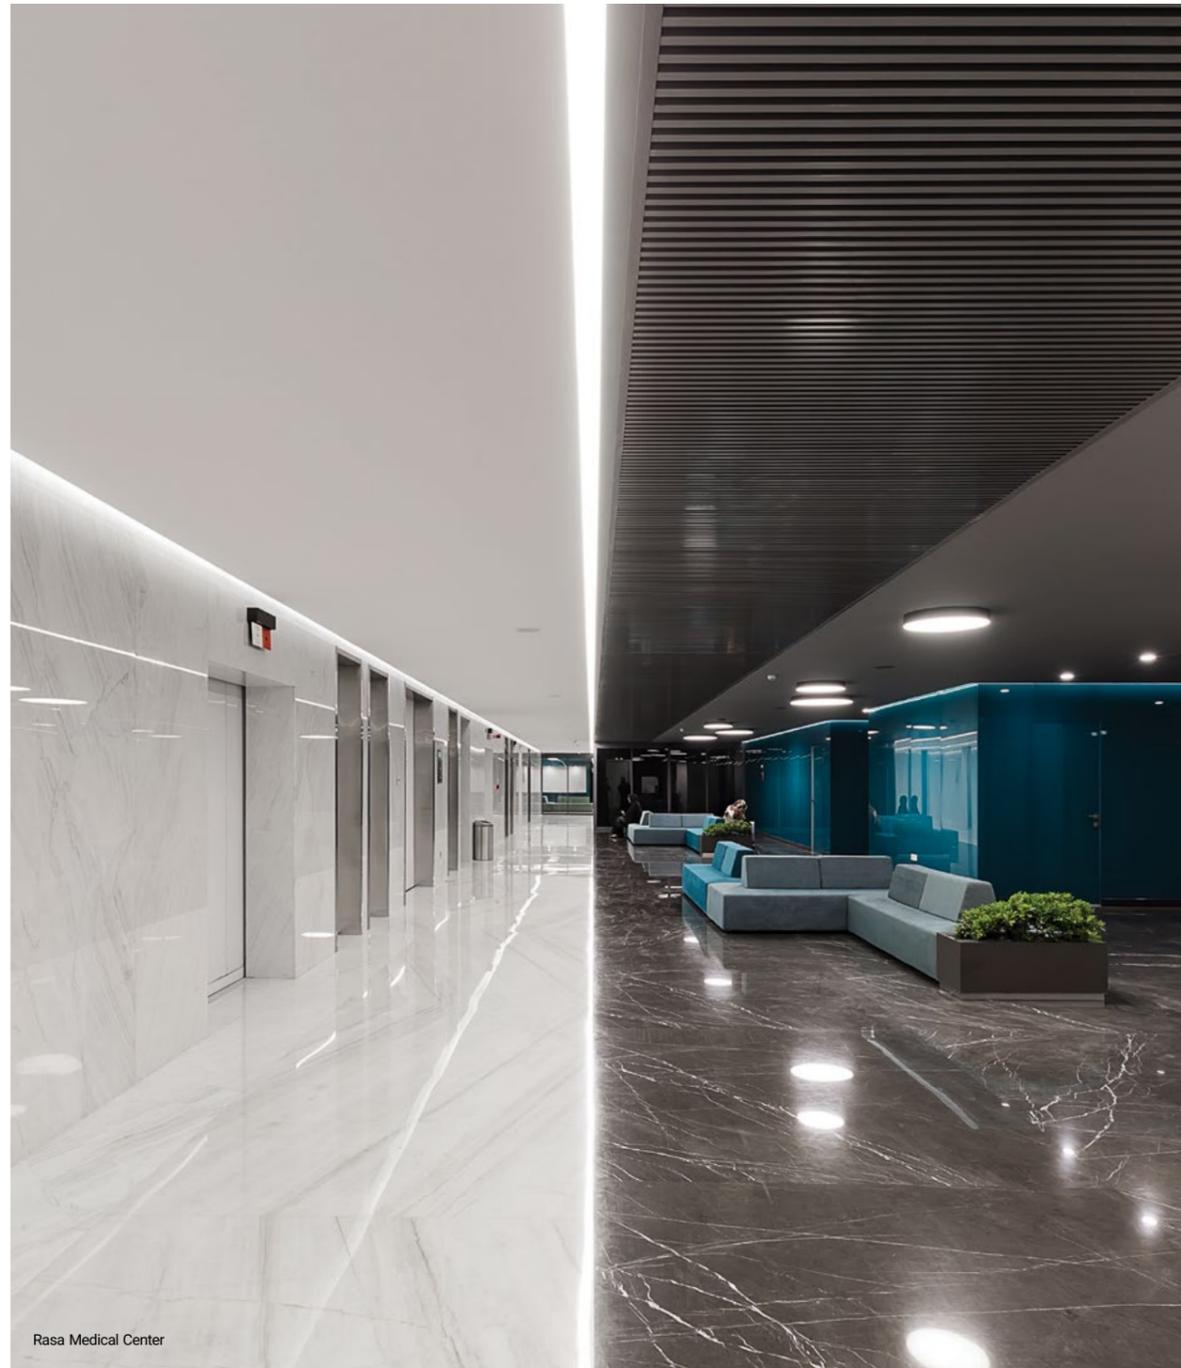

LINE RECESSED TRIMLESS




 **NL 90 PMiT**
L x 90 x 90 mm | up to 41w/m | up to 4855 lm/m
cut: 92mm


 **NL 60 PMiT**
L x 60 x 86 mm | up to 38 w/m | up to 3950 lm/m
cut: 62mm

 **NL 30 PCiT**
L x 35 x 86 mm | up to 29 w/m | up to 2970 lm/m
cut: 37mm

 **installation**
more information
3D object

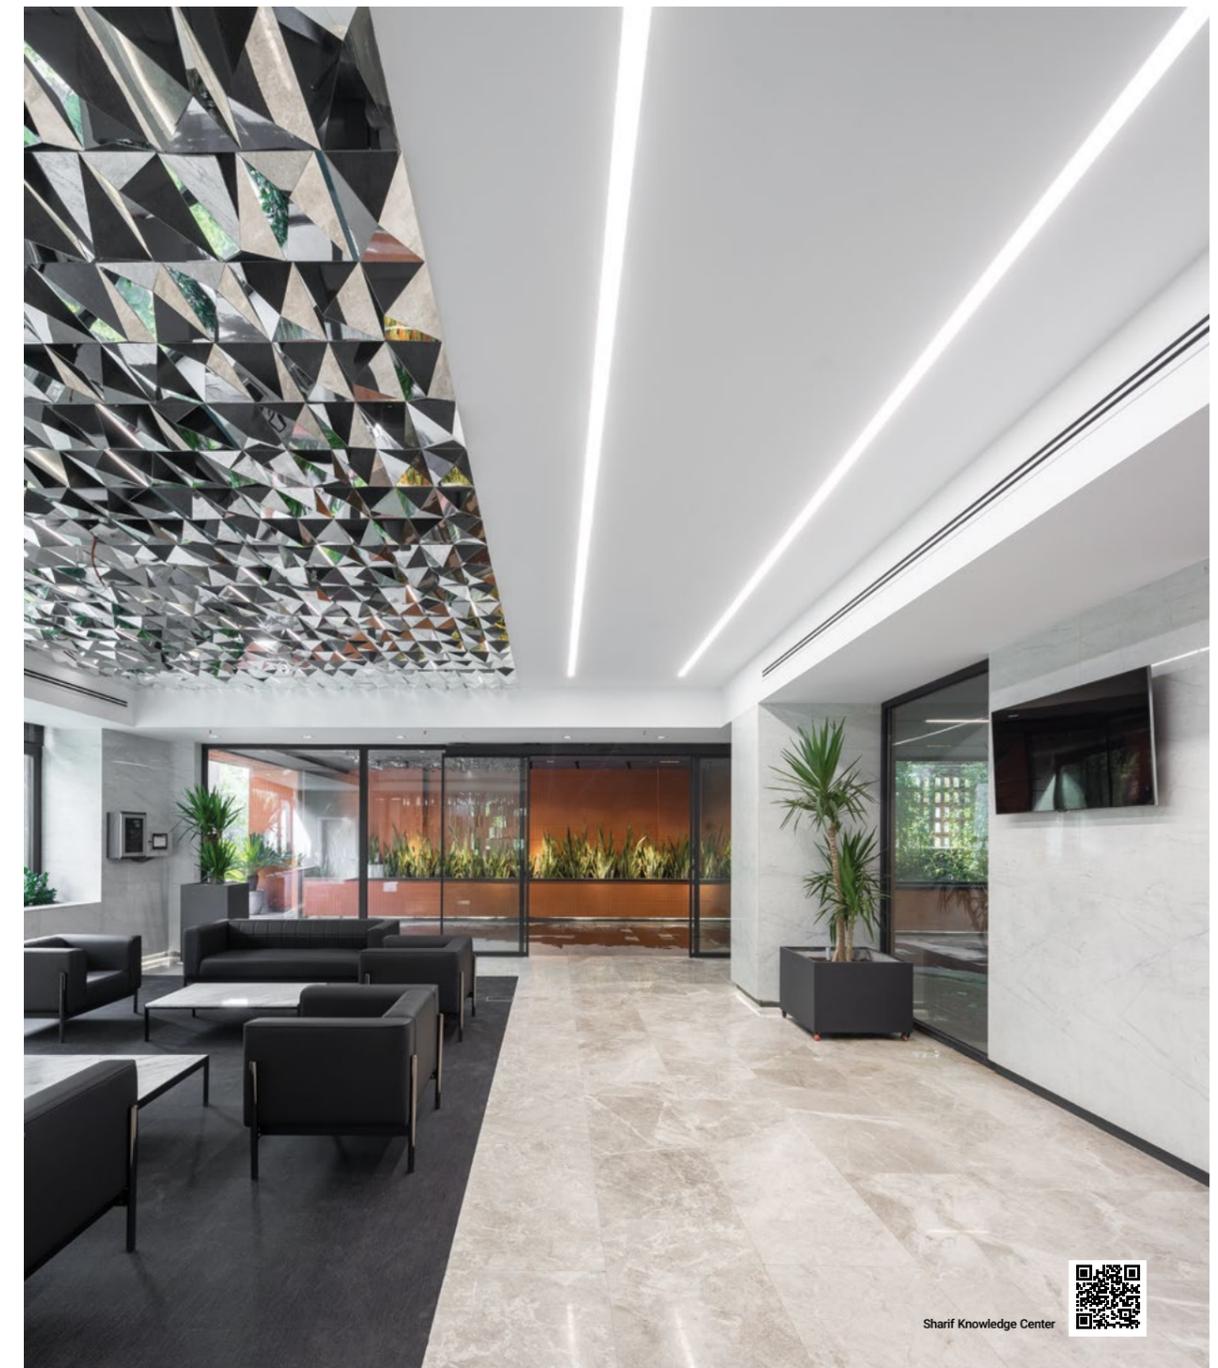


LINE LOW HEIGHT



NL 90 LH
L x 90 x 55 mm | up to 41w/m | up to 4855 lm/m
cut: 92mm

NL 60 LH
L x 60 x 55 mm | up to 38 w/m | up to 3950 lm/m
cut: 62mm

 installation
more information
3D object

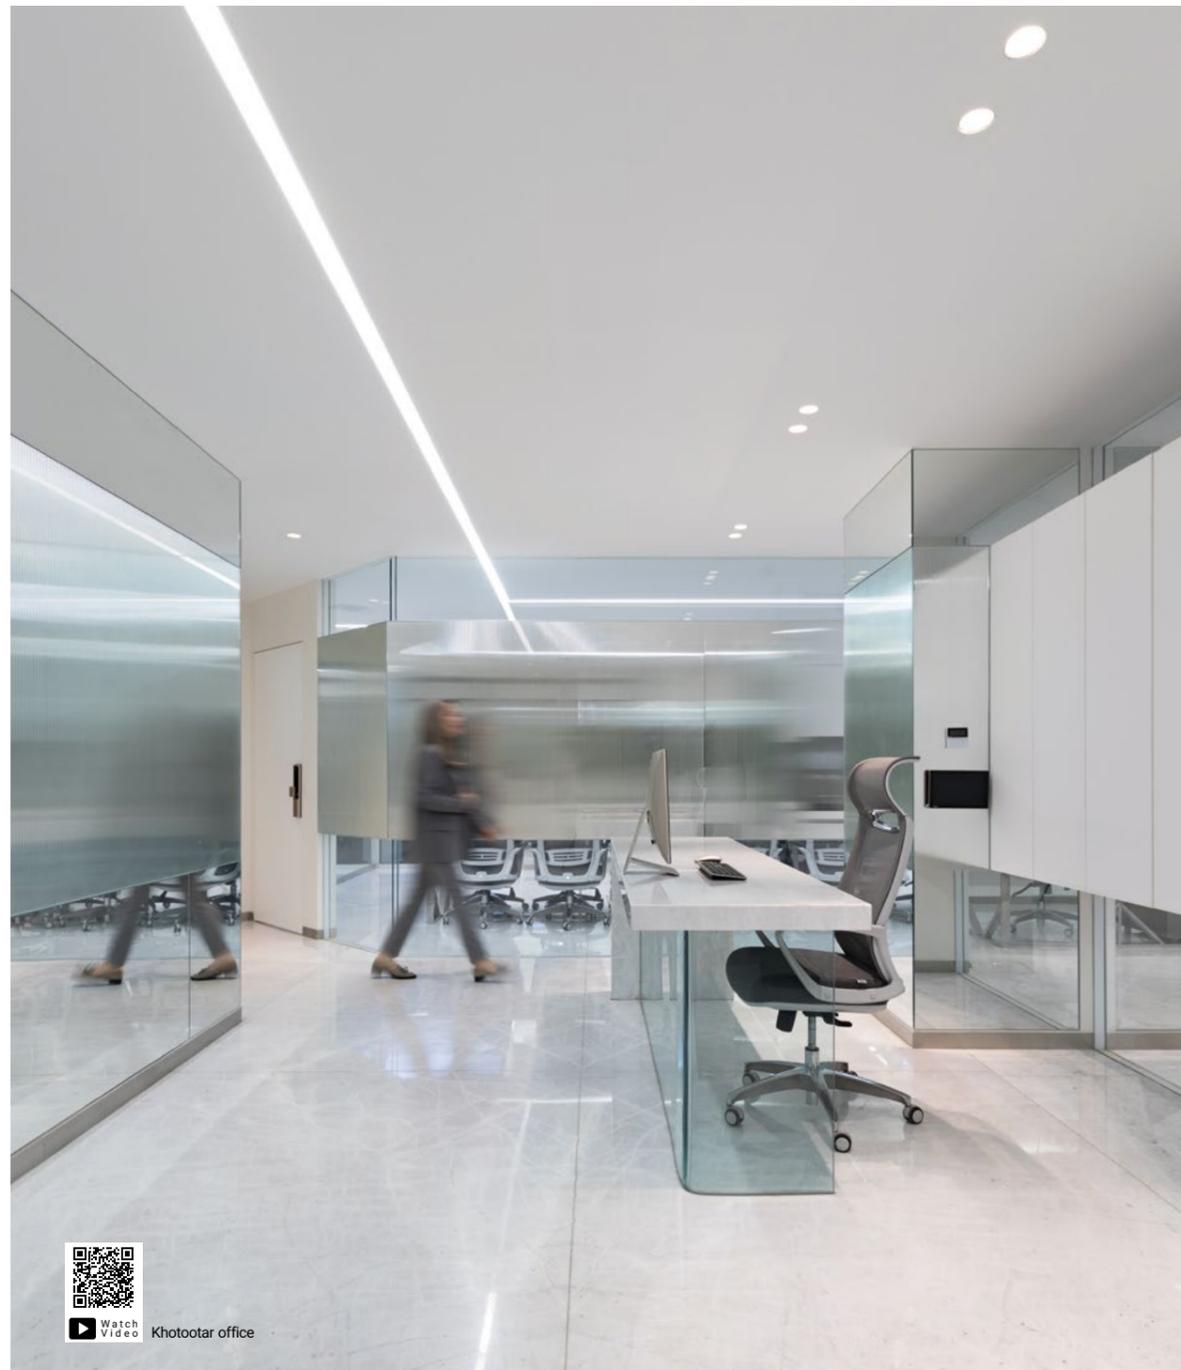

SUBLINE




NL 90 SUB ... Gli
L x 107mm x 92 mm
up to 41w/m
up to 4400 lm/m



Sealant gasket

 installation
more information
3D object

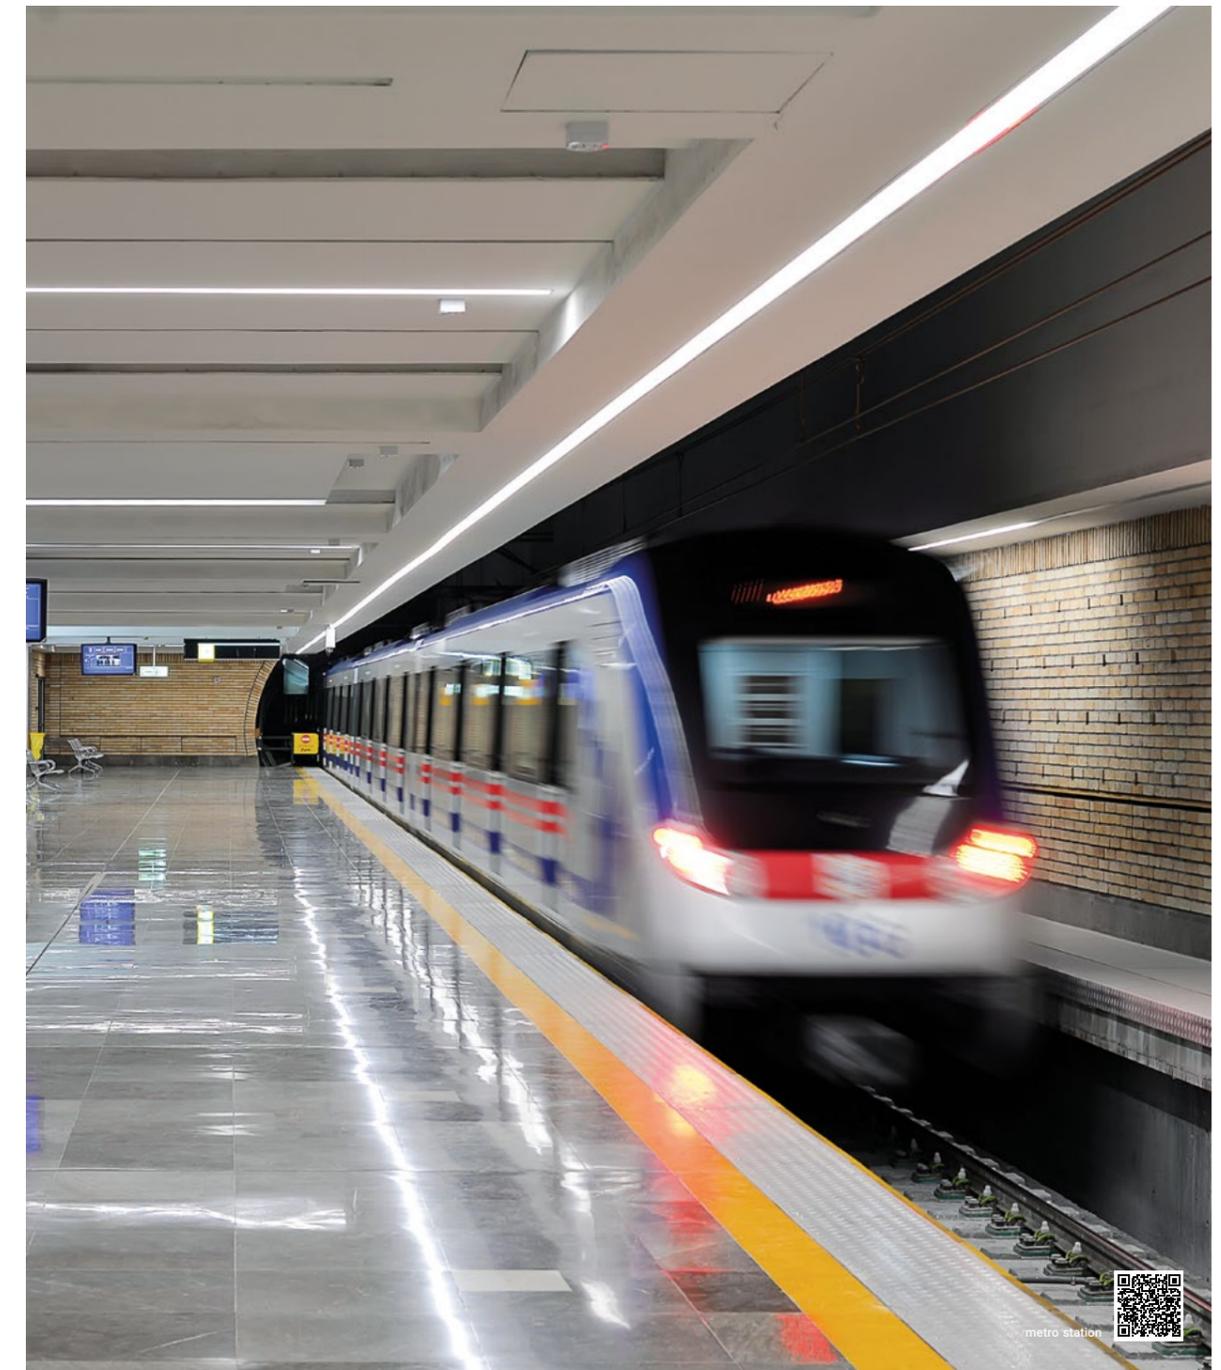





LINE UP & DOWN



LINE (Series: NL 30 / 60 / 90 ... PMi)
System Component & installation Instruction

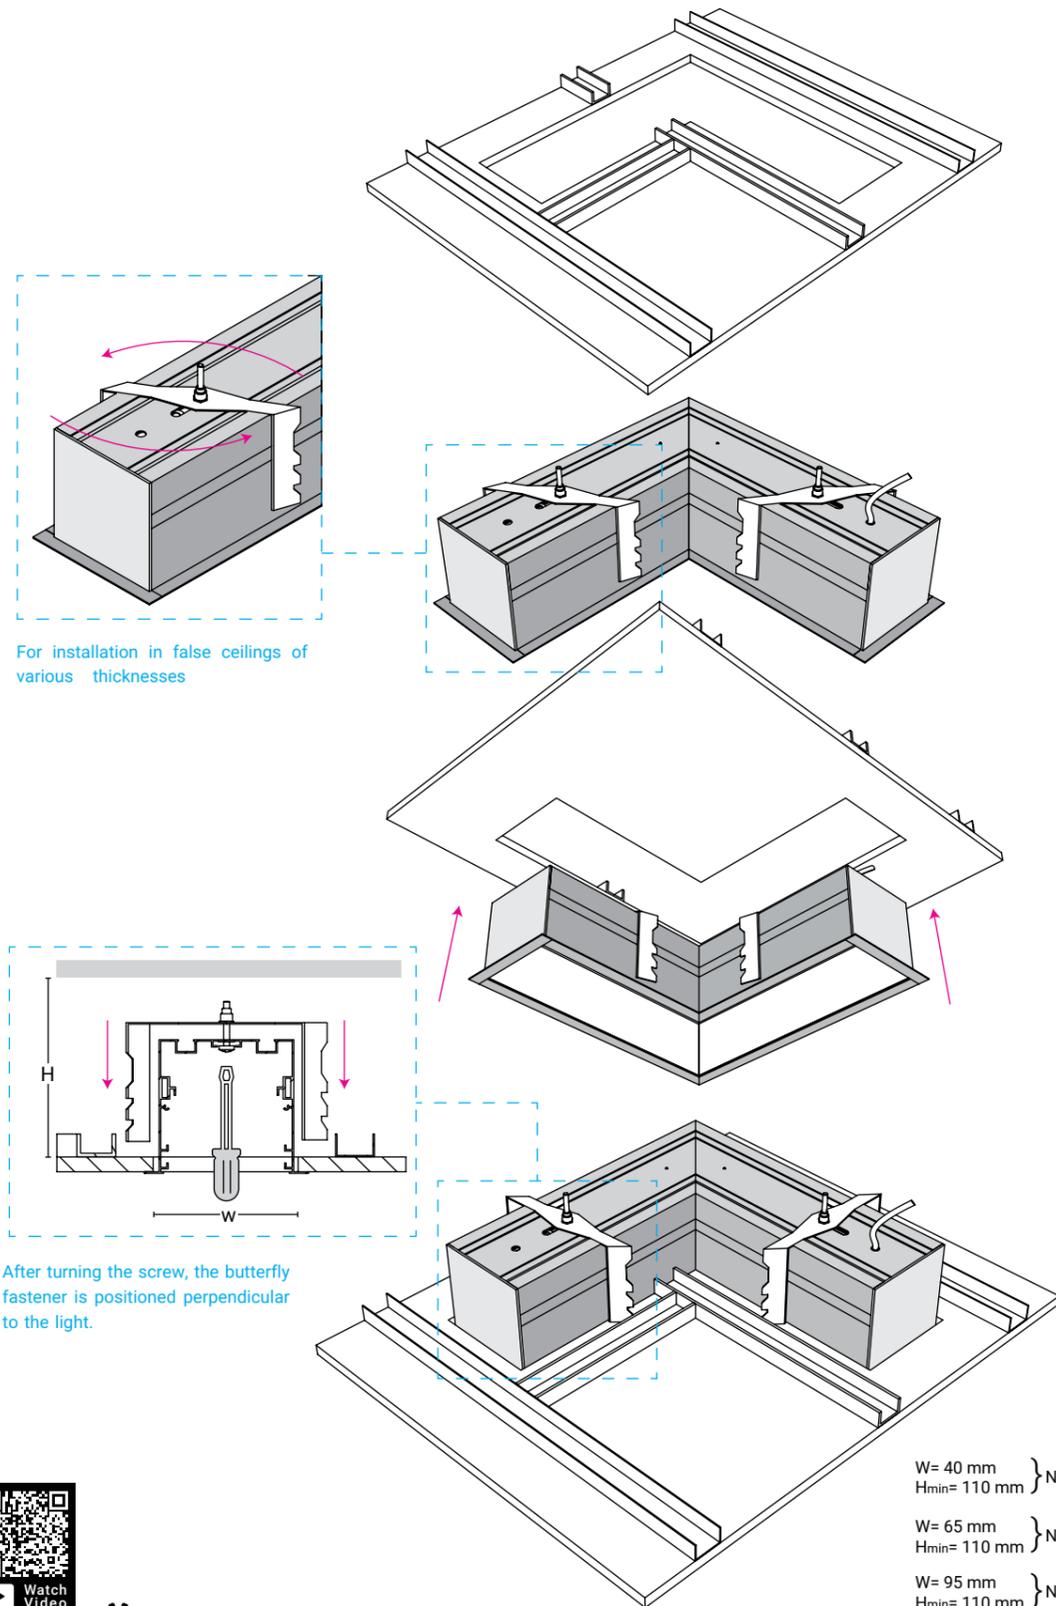


LINE (Series: NL 30 / 60 / 90 ... PMp)
System Component & installation Instruction

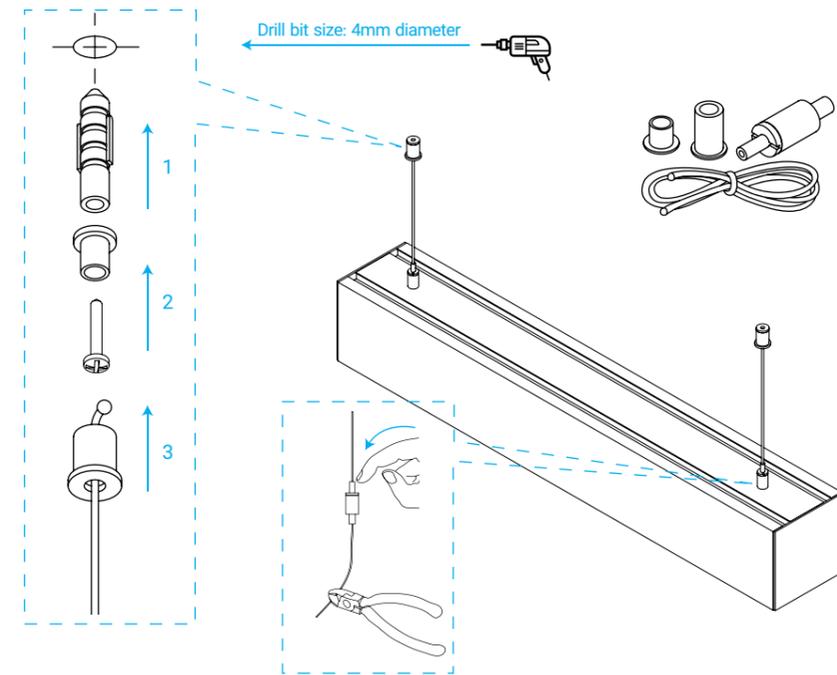

The maximum height of the Line light from the ceiling is 20 centimeters. The Line light provides the ambient lighting for the environment.

LINE (Series: NL 30 / 60 / 90 ... PM)
System Component & installation Instruction

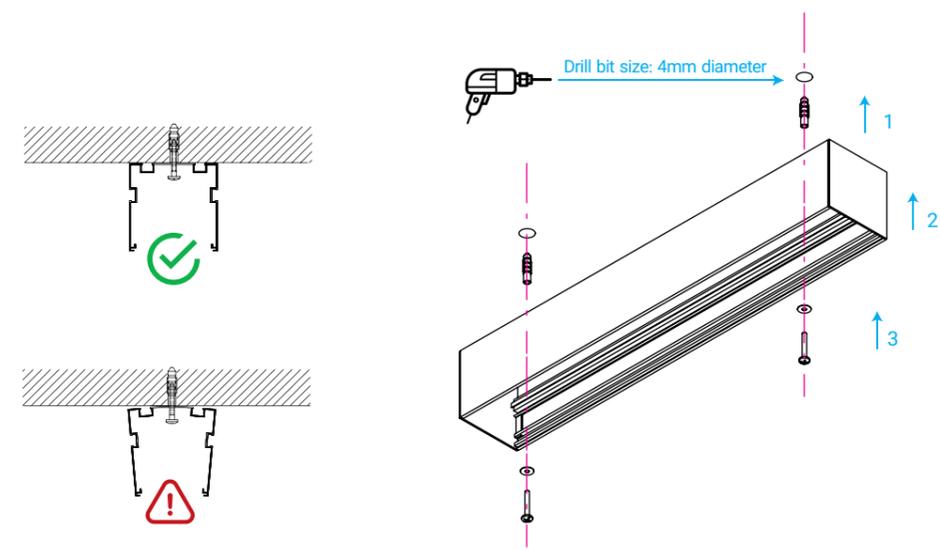


For recessed linear lights: The body (profile) is directly screwed to the ceiling or wall



LINE

NL 30 Section View

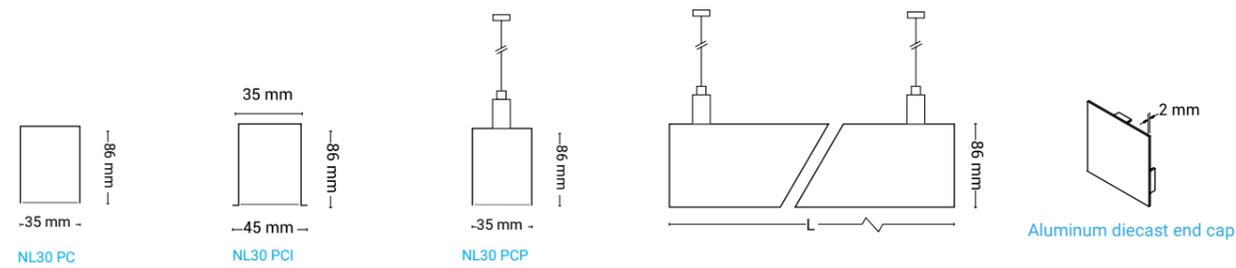


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|----------------------|-----------|-----------------|--------------------|-------------|
| NL 30 114 PC/PCP/PCI | 33.6 w | 47.3 | 1590 | 1140 |
| NL 30 171 PC/PCP/PCI | 49.4 w | 48 | 2385 | 1710 |
| NL 30 227 PC/PCP/PCI | 65.2 w | 48 | 3181 | 2270 |
| NL 30 284 PC/PCP/PCI | 81 w | 49 | 3976 | 2840 |

PCP: pendant PCI: recessed PC: surface

NL 60 Section View

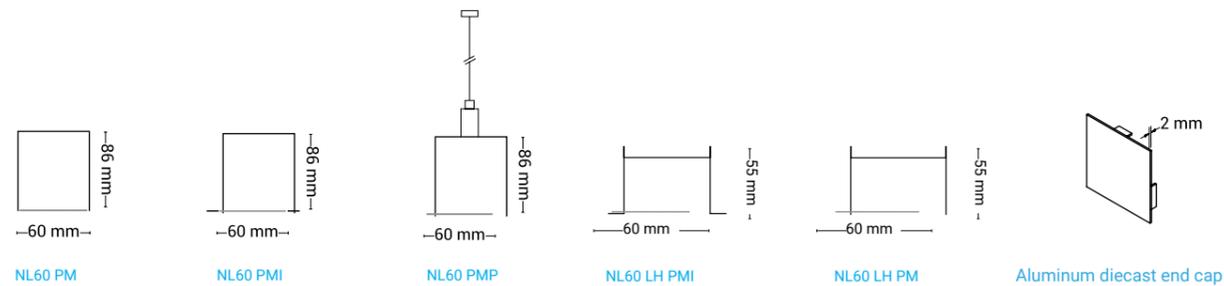


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|--------------------------------------|-------------|-----------------|--------------------|-------------|
| NL 60 114 \diamond PM/PMP/PMI (H1) | 33.6 (44.2) | 100 (101) | 3374 (4495) | 1140 |
| NL 60 171 \diamond PM/PMP/PMI (H1) | 49.4 (65.3) | 102 (103) | 5061 (6741) | 1710 |
| NL 60 227 \diamond PM/PMP/PMI (H1) | 65.2 (86.4) | 103 (104) | 6748 (8988) | 2270 |
| NL 60 284 \diamond PM/PMP/PMI (H1) | 81 (107.5) | 104 (105) | 8435 (11235) | 2840 |

PCP: pendant PCI: recessed PC: surface H1, H2: higher wattages
 \diamond : replace LH for ordering low high profiles

NL 90 Section View

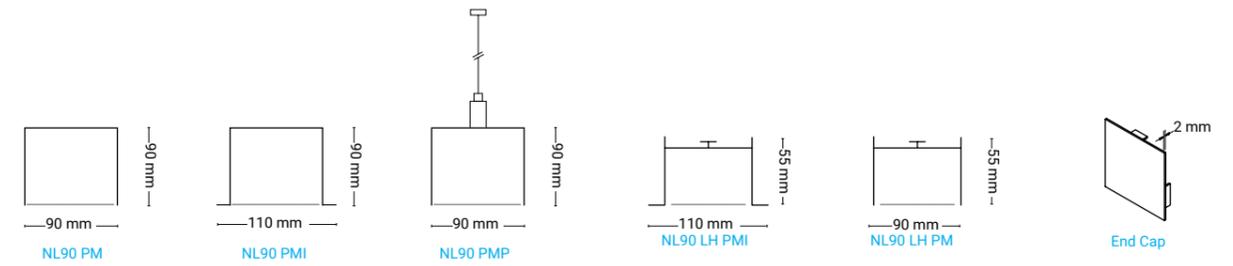


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|--------------------------------------|-------------|-----------------|--------------------|-------------|
| NL 90 114 \diamond PM/PMP/PMI (H1) | 33.6 (47.6) | 100.42 (115.88) | 3374 (5516) | 1140 |
| NL 90 171 \diamond PM/PMP/PMI (H1) | 49.4 (70.4) | 102.45 (117.53) | 5061 (8274) | 1710 |
| NL 90 227 \diamond PM/PMP/PMI (H1) | 65.2 (93.2) | 103.50 (118.37) | 6748 (11032) | 2270 |
| NL 90 284 \diamond PM/PMP/PMI (H1) | 81 (116) | 104.14 (118.88) | 8435 (13790) | 2840 |
| NL90 114 PM/PMP/PMI (H2) | 73 | 110 | 8040 | 1140 |
| NL90 227 PM/PMP/PMI (H2) | 144 | 111.6 | 16080 | 2270 |

PCP: pendant PCI: recessed PC: surface H1, H2: higher wattages

LINE NL 60 UP-DOWN Section View

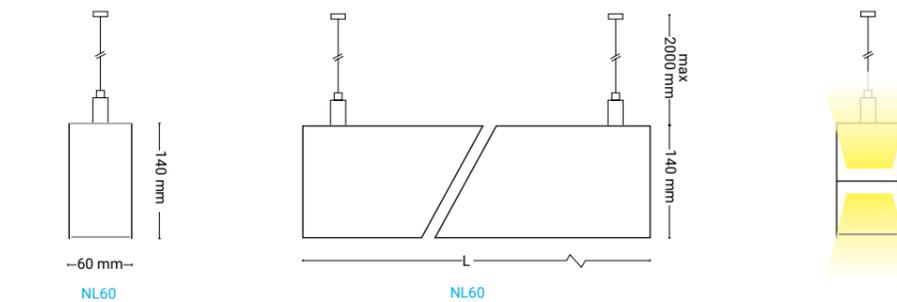


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|---------------|-----------|-----------------|--------------------|-------------|
| NL 60 114 PMD | 67.2 | 100 | 6748 | 1140 |
| NL 60 171 PMD | 98.8 | 102 | 10122 | 1710 |
| NL 60 227 PMD | 130.4 | 103 | 13496 | 2270 |
| NL 60 284 PMD | 162 | 104 | 16870 | 2840 |

PCP: pendant


SUBLINE Section View

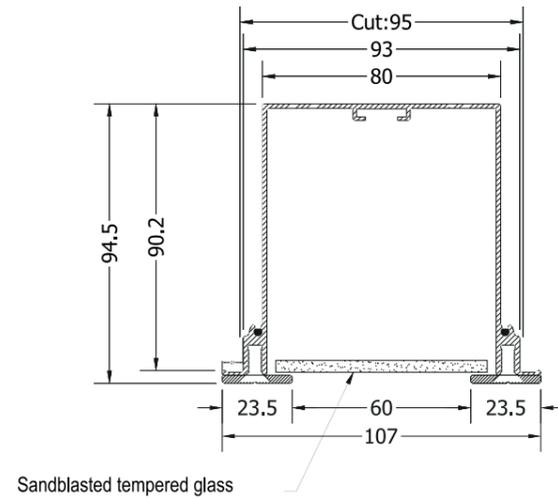

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|-------------------|-----------|-----------------|--------------------|------------------|
| NL 90 SUB 114 Gli | 39 | 104 | 4046 | 1140 X 95 X 94.5 |
| NL 90 SUB 171 Gli | 58 | 105 | 6069 | 1710 X 95 X 94.5 |
| NL 90 SUB 227 Gli | 76 | 106 | 8092 | 2270 X 95 X 94.5 |
| NL 90 SUB 284 Gli | 97 | 104 | 10115 | 2840 X 95 X 94.5 |


ARC LINE Section view

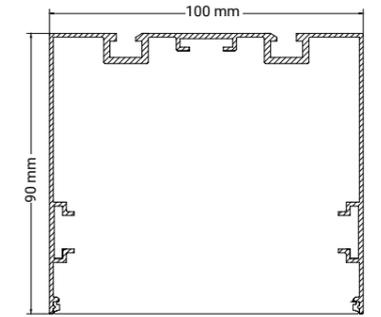

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|-----------------|-------------|-----------------|--------------------|----------------|
| NARC 100 114 PM | 33.6 (47.6) | 100 (115) | 3374 (5516) | 1140 |
| NARC 100 171 PM | 49.4 (70.4) | 102 (117) | 5061 (8274) | 1710 |
| NARC 100 227 PM | 65.2 (93.2) | 103 (118) | 6748 (11032) | 2270 |
| NARC 100 284 PM | 81 (116) | 104 (118) | 8435 (13790) | 2840 |

PROLINE Section View

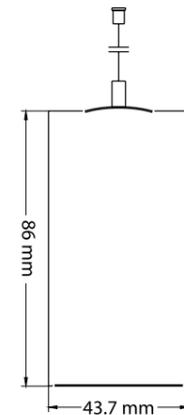

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|-------------|-----------|-----------------|--------------------|------------------|
| NPL 114 PMD | 46 | 121 | 5606 | L x 86 x 43.7 mm |
| NPL 171 PMD | 68 | 123 | 8409 | L x 86 x 43.7 mm |
| NPL 227 PMD | 89 | 125 | 11212 | L x 86 x 43.7 mm |
| NPL 284 PMD | 111 | 126 | 14015 | L x 86 x 43.7 mm |

PCP: pendant

VEORNA - SLIM - HIDDEN LINEAR LUMINAIRES



Verona trimless recessed linear
See information and download 3D object




Verona surface mount
See information and download 3D object




Verona pendant
See information and download 3D object

- 
Verona NVE 16 PC
 L x 16 x 17 mm | up to 10 w/m | up to 881 lm/m cut: 17mm
- 
Verona NVE 21 PC/ PCP/ PCIT
 L x 21 x 19 mm | up to 10 w/m | up to 881 lm/m cut: 23mm
- 
Verona NVE 21 PCI LH (Curved Edge)
 L x 21 x 12.5 mm | up to 10 w/m | up to 881 lm/m cut: 23mm
- 
Verona NVE 21 PCI
 L x 21 x 19 mm | up to 10 w/m | up to 881 lm/m cut: 23mm
- 
Verona NVE 40 PC/ PCP/ PCIT
 L x 34 x 34 mm | up to 22.6 w/m | up to 1830 lm/m cut: 35mm
- 
Verona NVE 40 PCI
 L x 39 x 30 mm | up to 22.6 w/m | up to 1830 lm/m cut: 40mm
- 
Verona NVE 40 LH PCI
 L x 44 x 16 mm | up to 22.6 w/m | up to 1830 lm/m cut: 35mm
- 
Slim NLS 45 PCIT
 L x 45 x 12.5 mm | up to 10 w/m | up to 881 lm/m cut: 45mm
- 
Slim NLS 40 PCIT
 L x 40 x 30 mm | up to 10 w/m | up to 881 lm/m cut: 40mm
- 
Hidden NHI 45 PM
 L x 45 x 45 mm | up to 20 w/m | up to 1762 lm/m

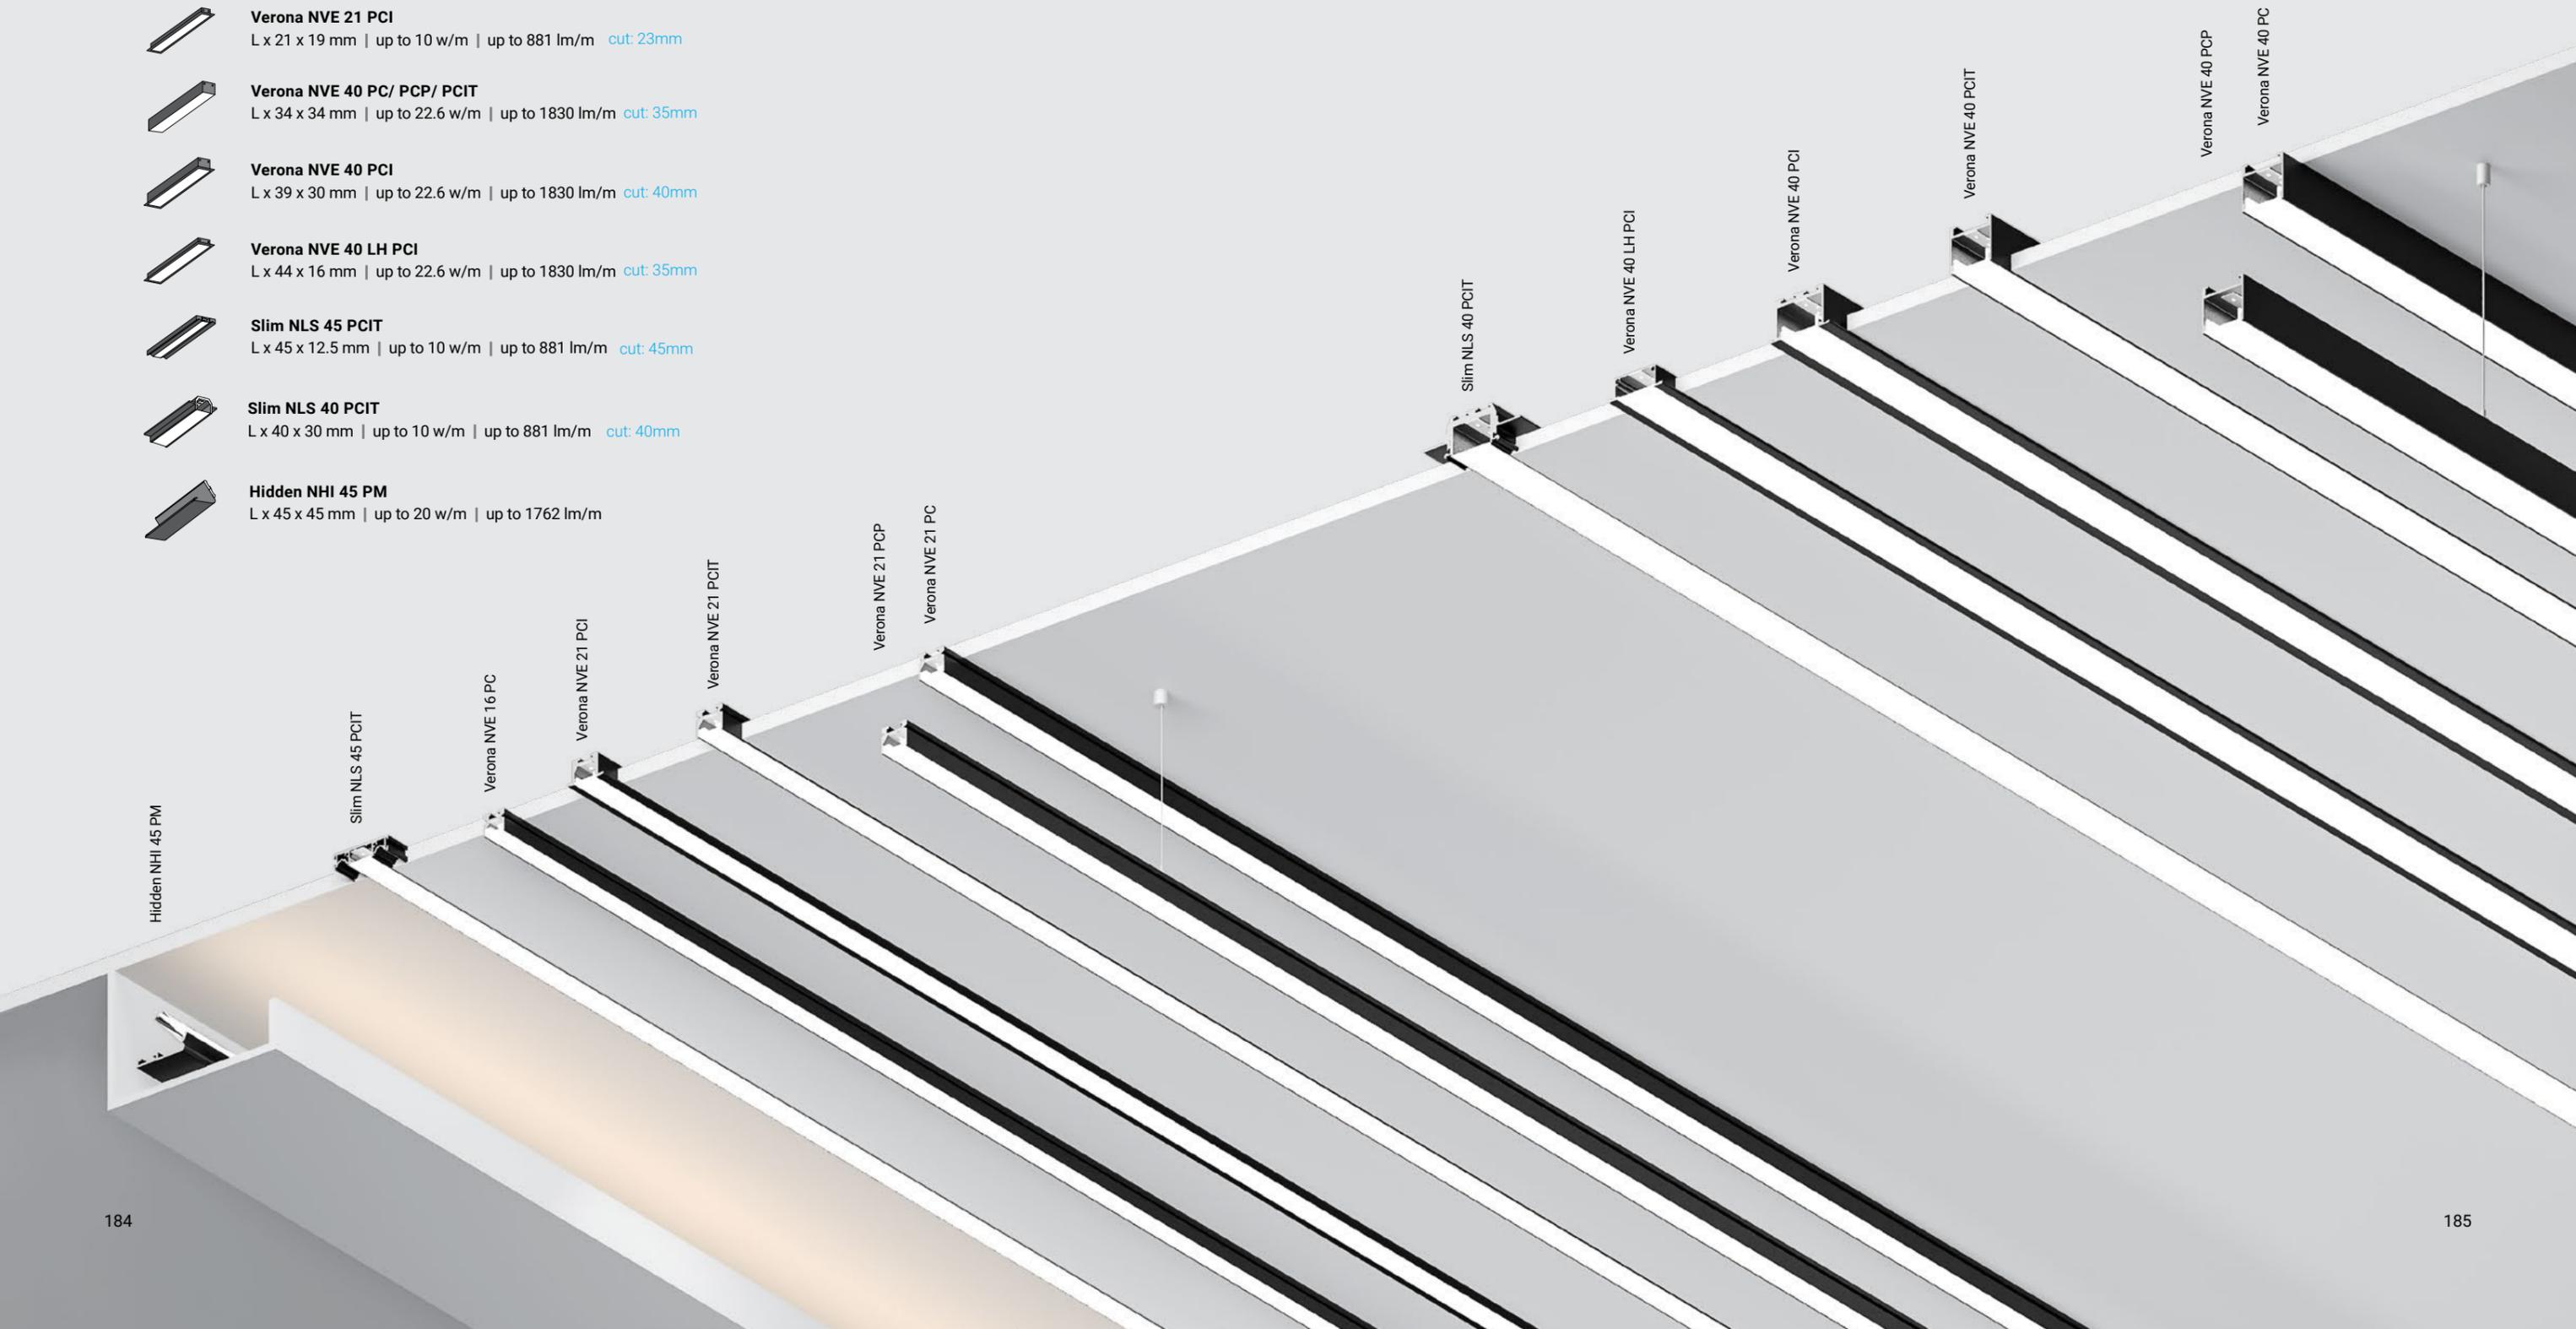


GUIDE LINE

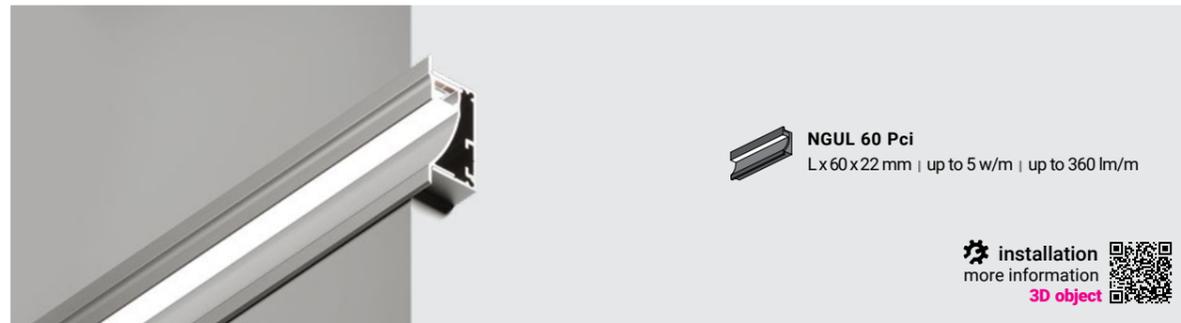



GUIDE LINE

Section View

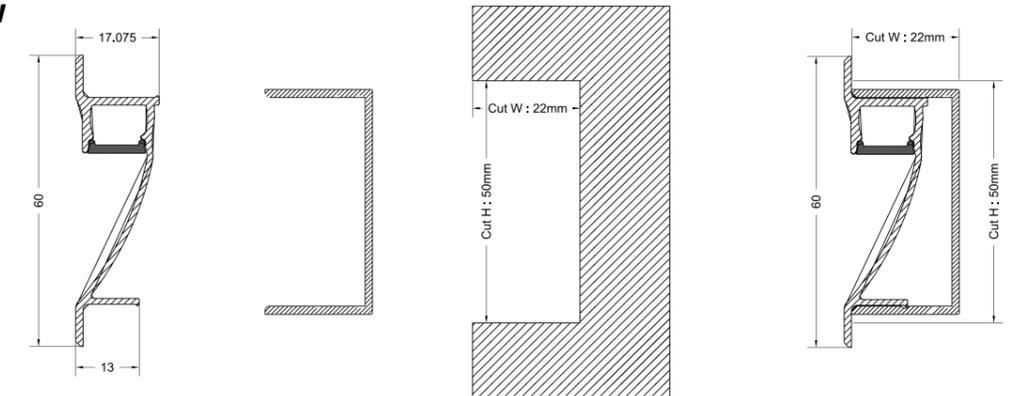


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|-------------|-----------|-----------------|--------------------|-------------|
| NGUL 60 Pci | 5 w | 72 | 360 | 1000 |

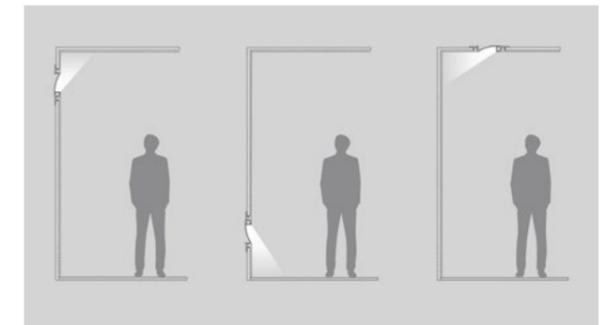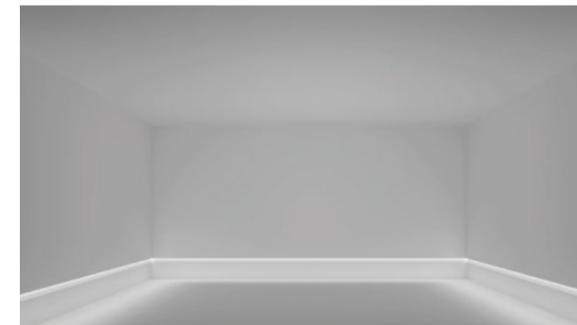

CORNER LINE

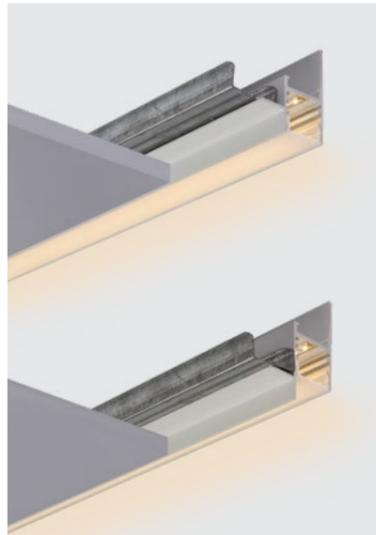

NCL H 40 PCI (H1)
1000 mm | up to 10 w/m | up to 881 lm/m | up to 88 lm/w



NCL H 40 PCI (H1)
1000 mm | up to 22.6 w/m | up to 1830 lm/m | up to 93 lm/w



NCL 40 PCI (H1)
1000 mm | up to 22.6 w/m | up to 1830 lm/m | up to 93 lm/w



CV Driver



Tridonic LED Strip






installation
more information
3D object



Watch Video
Diplomat Apartment

CORNER LINE


Section view

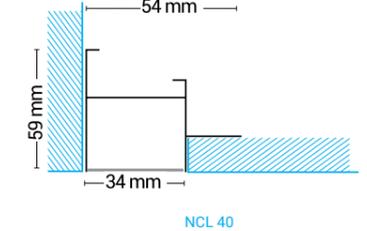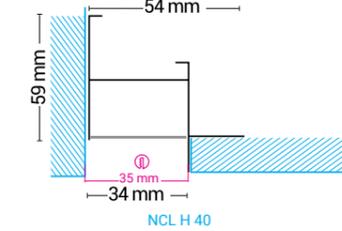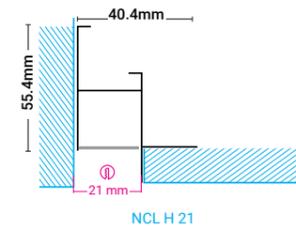

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|-------------------|-------------|-----------------|--------------------|-------------|
| NCL H 40 PCI (H1) | 14.2 (22.6) | 93 (81) | 1323 (1830) | 1000 |
| NCL H 21 PCI (H1) | 5 (10) | 88 | 440 (881) | 1000 |
| NCL 40 PCI (H1) | 14.2 (22.6) | 93 (81) | 1323 (1830) | 1000 |

H1, H2: higher wattages



Watch Video
installation






Heart Clinic

VERONA

Section View

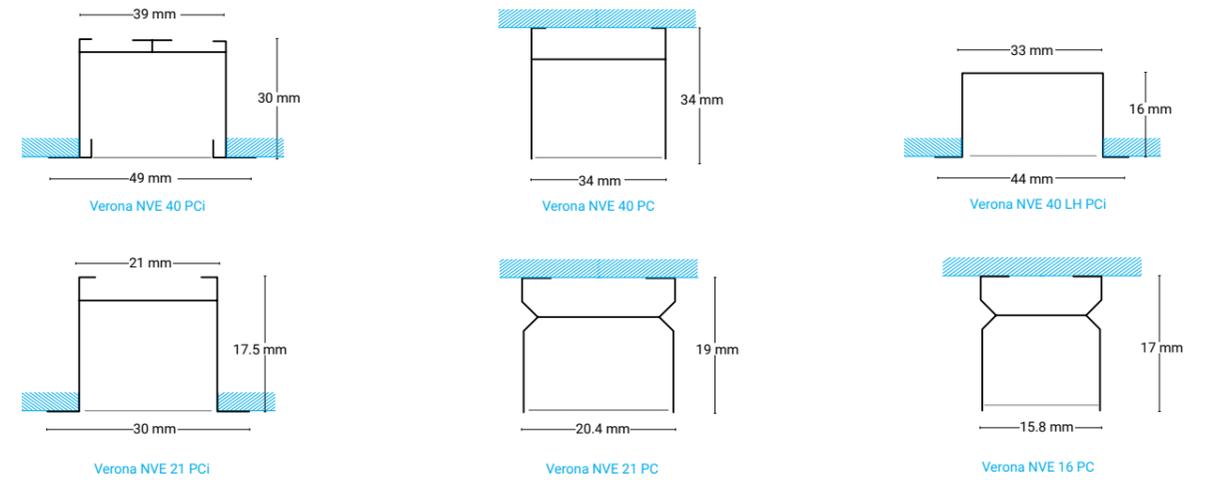


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|--------------------|-------------|-----------------|--------------------|-------------|
| NVE 16 PC (H1) | 5 (10) | 88 | 440 (881) | 1000 mm |
| NVE 21 PC (H1) | 5 (10) | 88 | 440 (881) | 1000 mm |
| NVE 21 PCI (H1) | 5 (10) | 88 | 440 (881) | 1000 mm |
| NVE 40 LH PCI (H1) | 14.2 (22.6) | 93 (81) | 1323 (1830) | 1000 mm |
| NVE 40 PC (H1) | 14.2 (22.6) | 93 (81) | 1323 (1830) | 1000 mm |
| NVE 40 PCI (H1) | 14.2 (22.6) | 93 (81) | 1323 (1830) | 1000 mm |

PCI: recessed PC: surface H1: higher wattages

SLIM

Section View

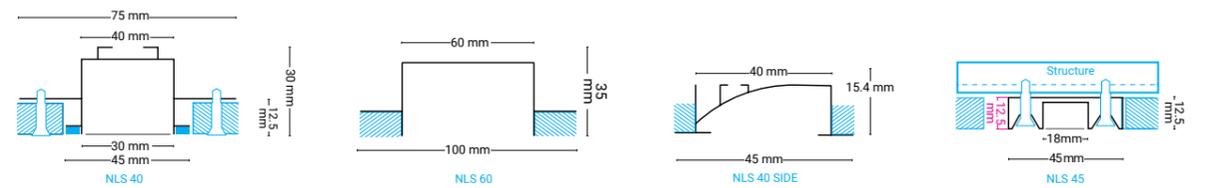

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|-----------------------|-------------|-----------------|--------------------|-------------|
| NLS 60 PCIT (H1) | 14.2-22.6 w | 93-81 lm/w | 1323 (1830) | 1000 |
| NLS 45 PCIT | 10 w | 88 lm/w | 881 | 1000 |
| NLS 40 PCIT (H1) | 14.2-22.6 w | 93-81 lm/w | 1323 (1830) | 1000 |
| NLS 40 SIDE PCIT (H1) | 14.2-22.6 w | 93-81 lm/w | 1323 (1830) | 1000 |

H1: higher wattages



Watch Video
installation

CURVE LINE




Customizable lights model Curve Line, designed to meet your unique architectural needs, are available in recessed, surface-mounted, and pendant modes to provide general lighting for your space.

CURVE LINE




NLC CS 100 PM/PMP
L x W x H mm | up to 39 w/m | up to 3378 lm/m
Customizable

installation
more information
3D object

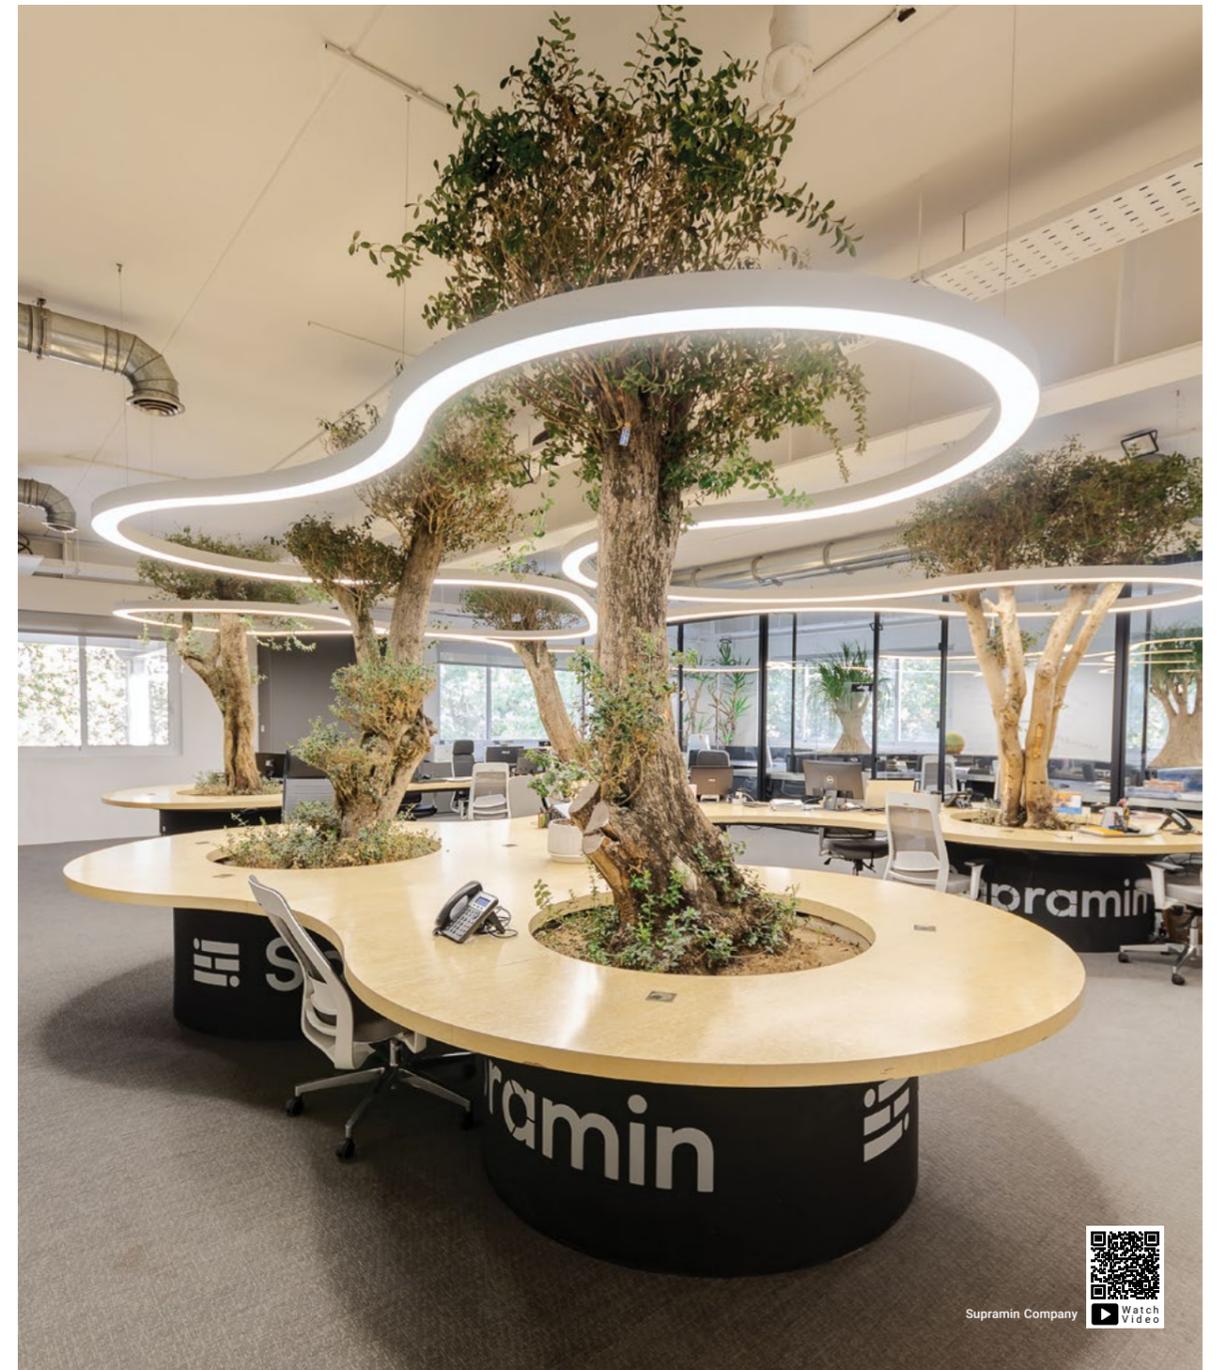


Supramin Company
Watch Video

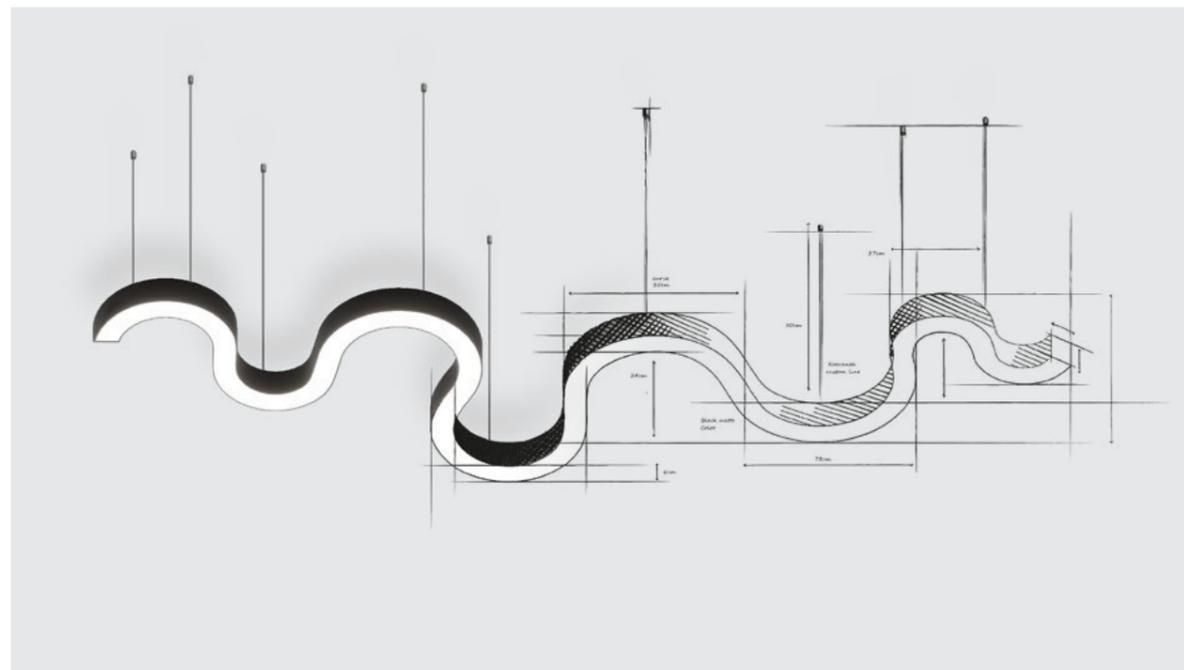

CURVE LINE

Section View

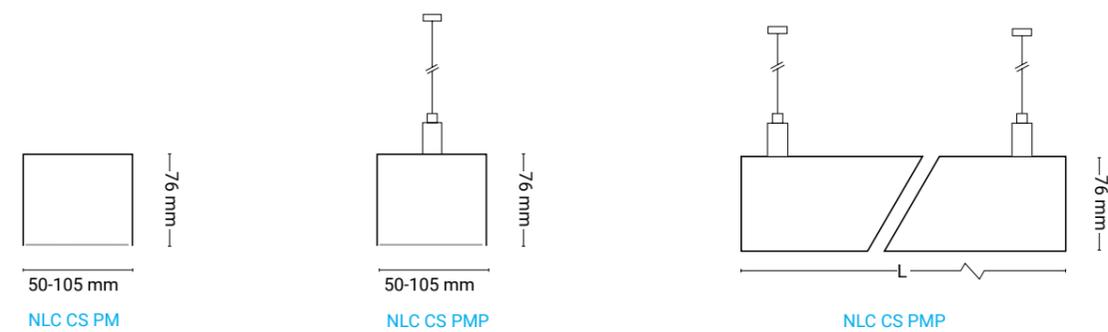

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|-------------------|-----------|-----------------|--------------------|-------------|
| NLC CS 100 PM/PMP | 38.7 | 87.2 | 3378 | 1000 |

PCP: pendant PC: surface



Red Ribbon Office



VIEW (IP68)



NV 23 ... Pui
L x 23.5 x 36 mm | up to 9.5 w/m | up to 921 lm/m
cut: 25mm


NV 30 ... Pui
L x 35 x 55 mm | up to 14 w/m | up to 1120 lm/m
cut: 37mm

Primary Profile

Easy Connection using springs




installation
more information
3D object

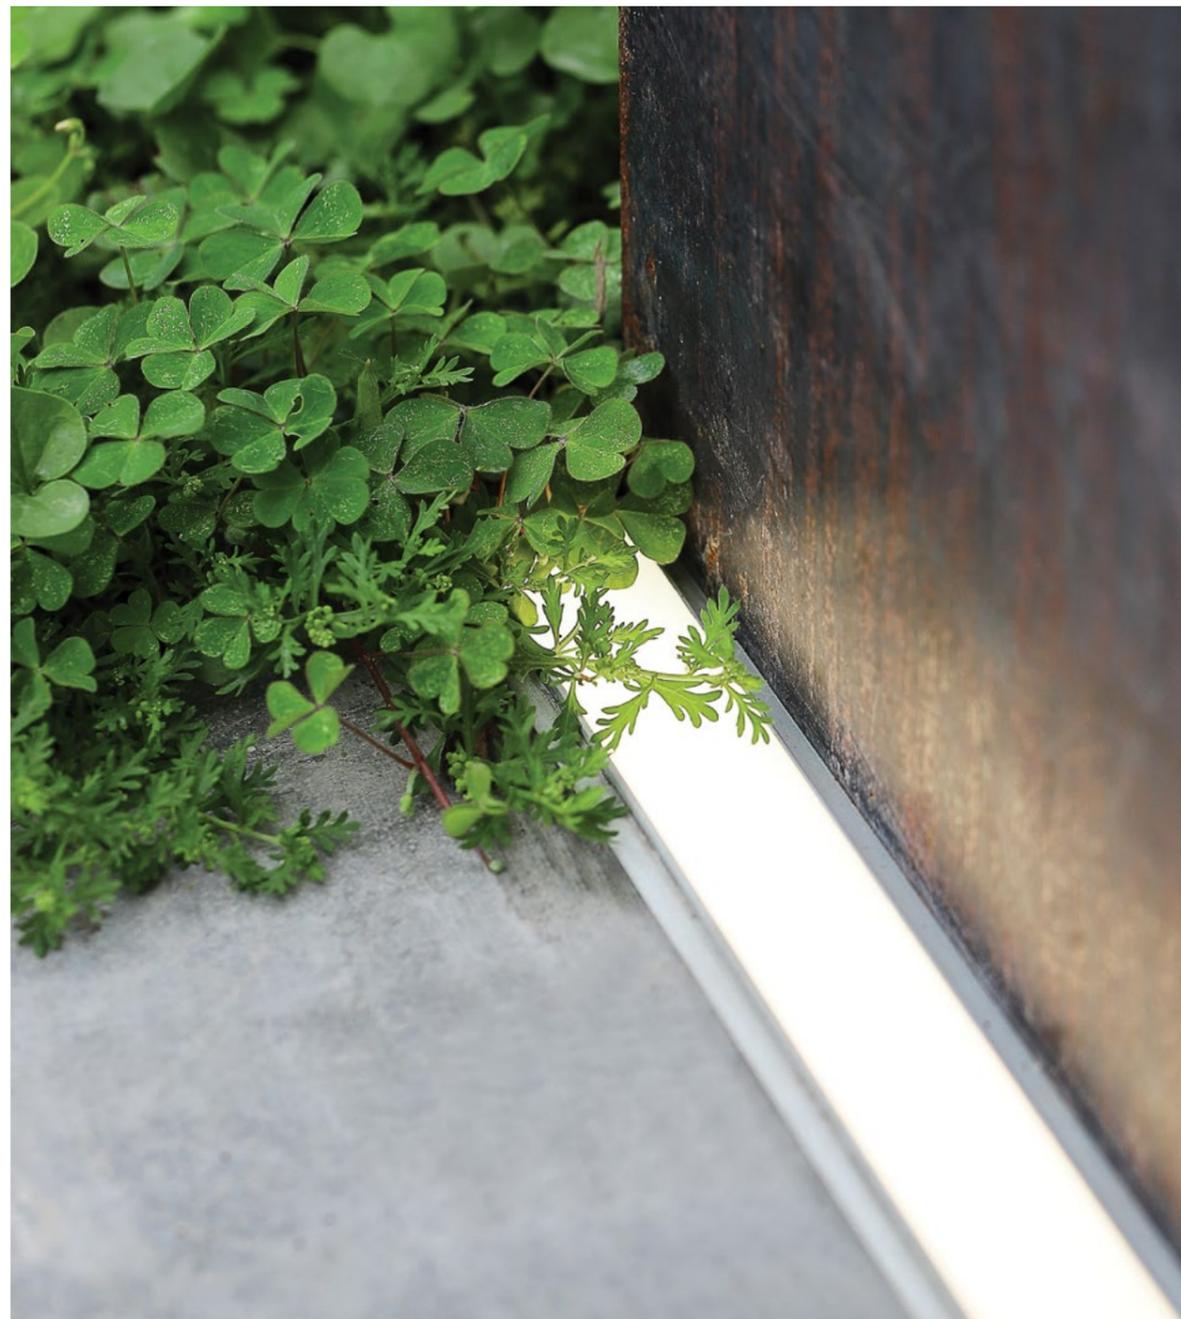

Private Villa Watch Video




Nooraneh "View" linear luminaires using LED RGB, provide variety of light colors, Uniform color changing and the lack of glare are the key features of this luminaire.

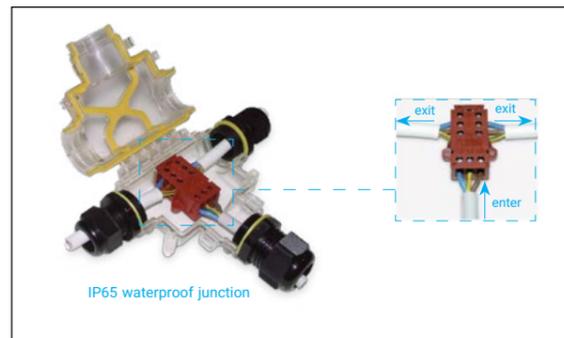

All connectors used in "View" has IP65 , IP68 protection rating and can be accessed in case of any fault.

VIEW

Section View

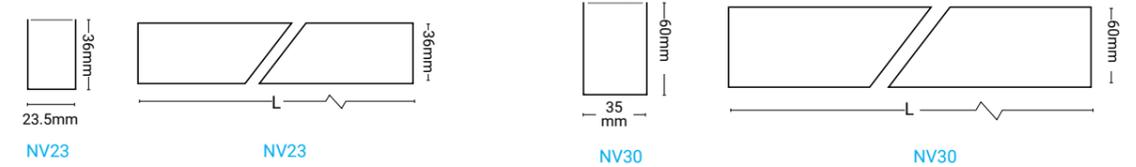

Technical Details

| Reference | Power (w/m) | Efficacy (lm/w) | Luminous flux (lm/m) | Dimension (mm) |
|----------------|-------------|-----------------|----------------------|----------------|
| NV 30 Pui (H1) | 6.2 (14) | 96.7 (80) | 600 (1120) | L x 35 x 55 |
| NV 23 Pui (H1) | 5.5 (9.5) | 92.9 (96.9) | 511 (921) | L x 23.5 x 36 |

H1: higher wattages


MANNA



NM 1818 PMI
180 x 180 mm | 35 w | 4250 lm
12°, 24°, 38° beam angle



NM 1834 PMI
180 x 340 mm | 2 x 35 w | 8500 lm



Customize
12°, 24°, 38° beam angle



Magnetic installation



ADJUSTABLE



FRAMED OR FRAMLESS

installation
more information
3D object



Watch Video
A1 Commercial Building

MANNA MINI (TRIMLESS)



NM 1010 PMI
105 x 105 mm | up to 10 w | up to 1315 lm
12°, 38°, 60° beam angle |



NM 1020 PMI
200x105 mm | up to 2x20 w | up to 2630 lm
12°, 38°, 60° beam angle |



Customize
12°, 38°, 60° beam angle



Magnetic installation



Lens



Reflector



ADJUSTABLE






installation
more information
3D object



Private villa
Watch Video


MANNA

Installing Instruction

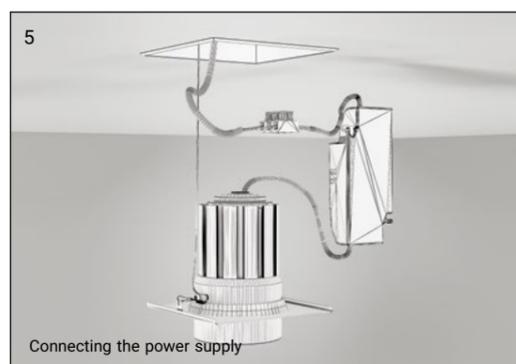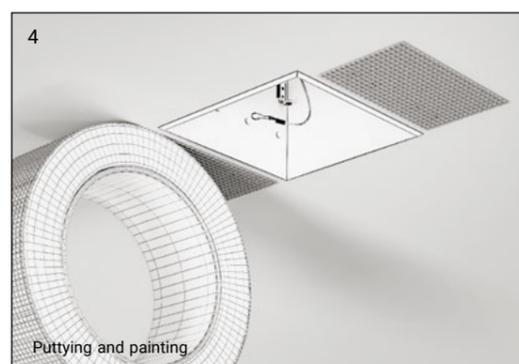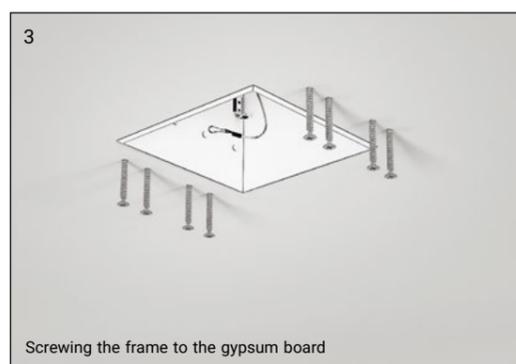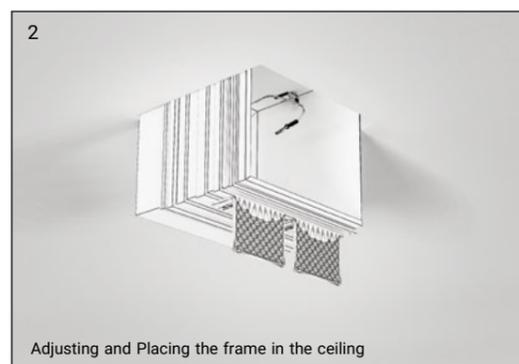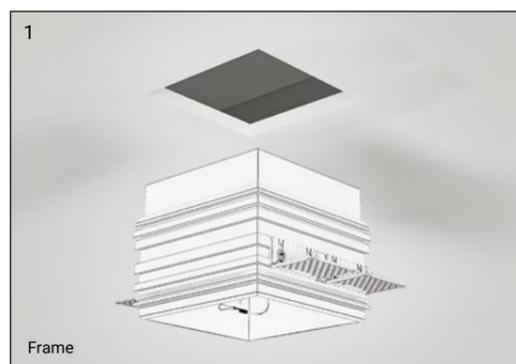

MANNA

Section View

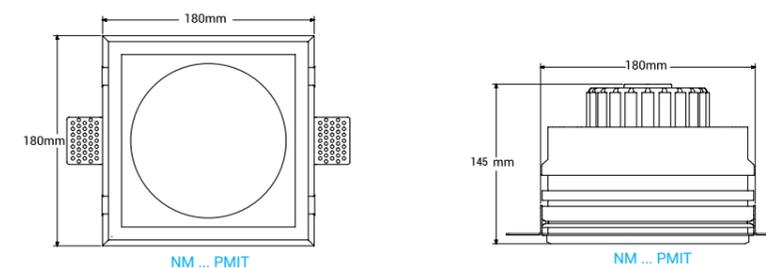

Technical Details


| Reference | Power (mm) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Cutting Diameter (mm) |
|---------------------|------------|-----------------|--------------------|---------|-----------------------|
| NM 1818 12 PMI/PMIT | 35 | 121.4 | 4250 | 12° SYM | 180x180 |
| NM 1818 24 PMI/PMIT | 35 | 121.4 | 4250 | 24° SYM | 180x180 |
| NM 1818 38 PMI/PMIT | 35 | 121.4 | 4250 | 38° SYM | 180x180 |
| NM 1834 12 PMI/PMIT | 2 x 35 | 121.4 | 2 x 4250 | 12° SYM | 180x340 |
| NM 1834 24 PMI/PMIT | 2 x 35 | 121.4 | 2 x 4250 | 24° SYM | 180x340 |
| NM 1834 38 PMI/PMIT | 2 x 35 | 121.4 | 2 x 4250 | 38° SYM | 180x340 |

PMI : recessed PMIT: trimless recessed



MANNA MINI

Section View

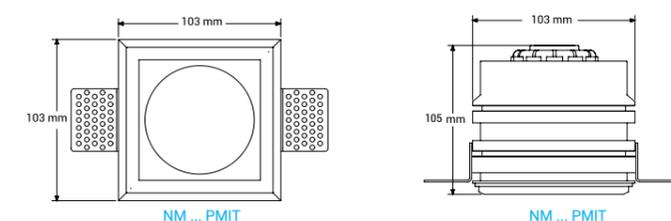

Technical Details

| Reference | Power (mm) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Cutting Diameter (mm) |
|--------------------------|--------------|-----------------|--------------------|---------|-----------------------|
| NM 1010 12 PMI/PMIT (H1) | 5.5 (10) | 131.5 (88.3) | 1315 (485.7) | 12° SYM | 105x105 |
| NM 1010 38 PMI/PMIT (H1) | 5.5 (10) | 131.5 (88.3) | 1315 (485.7) | 38° SYM | 105x105 |
| NM 1010 60 PMI/PMIT (H1) | 5.5 (10) | 131.5 (88.3) | 1315 (485.7) | 60° SYM | 105x105 |
| NM 1020 12 PMI/PMIT (H1) | 2 x 5.5 (10) | 131.5 (88.3) | 2 x 1315 (485.7) | 12° SYM | 200x105 |
| NM 1020 38 PMI/PMIT (H1) | 2 x 5.5 (10) | 131.5 (88.3) | 2 x 1315 (485.7) | 38° SYM | 200x105 |
| NM 1020 60 PMI/PMIT (H1) | 2 x 5.5 (10) | 131.5 (88.3) | 2 x 1315 (485.7) | 60° SYM | 200x105 |

PMI : recessed PMIT: trimless recessed H1: higher wattages




PINTO-R



NP 60 Pmit
Ø598 mm | 50 w | 6393 lm

NP 90 Pmit
Ø898 mm | 67 w | 8524 lm

NP 120 Pmit
Ø1180 mm | 100 w | 12787 lm
Customize

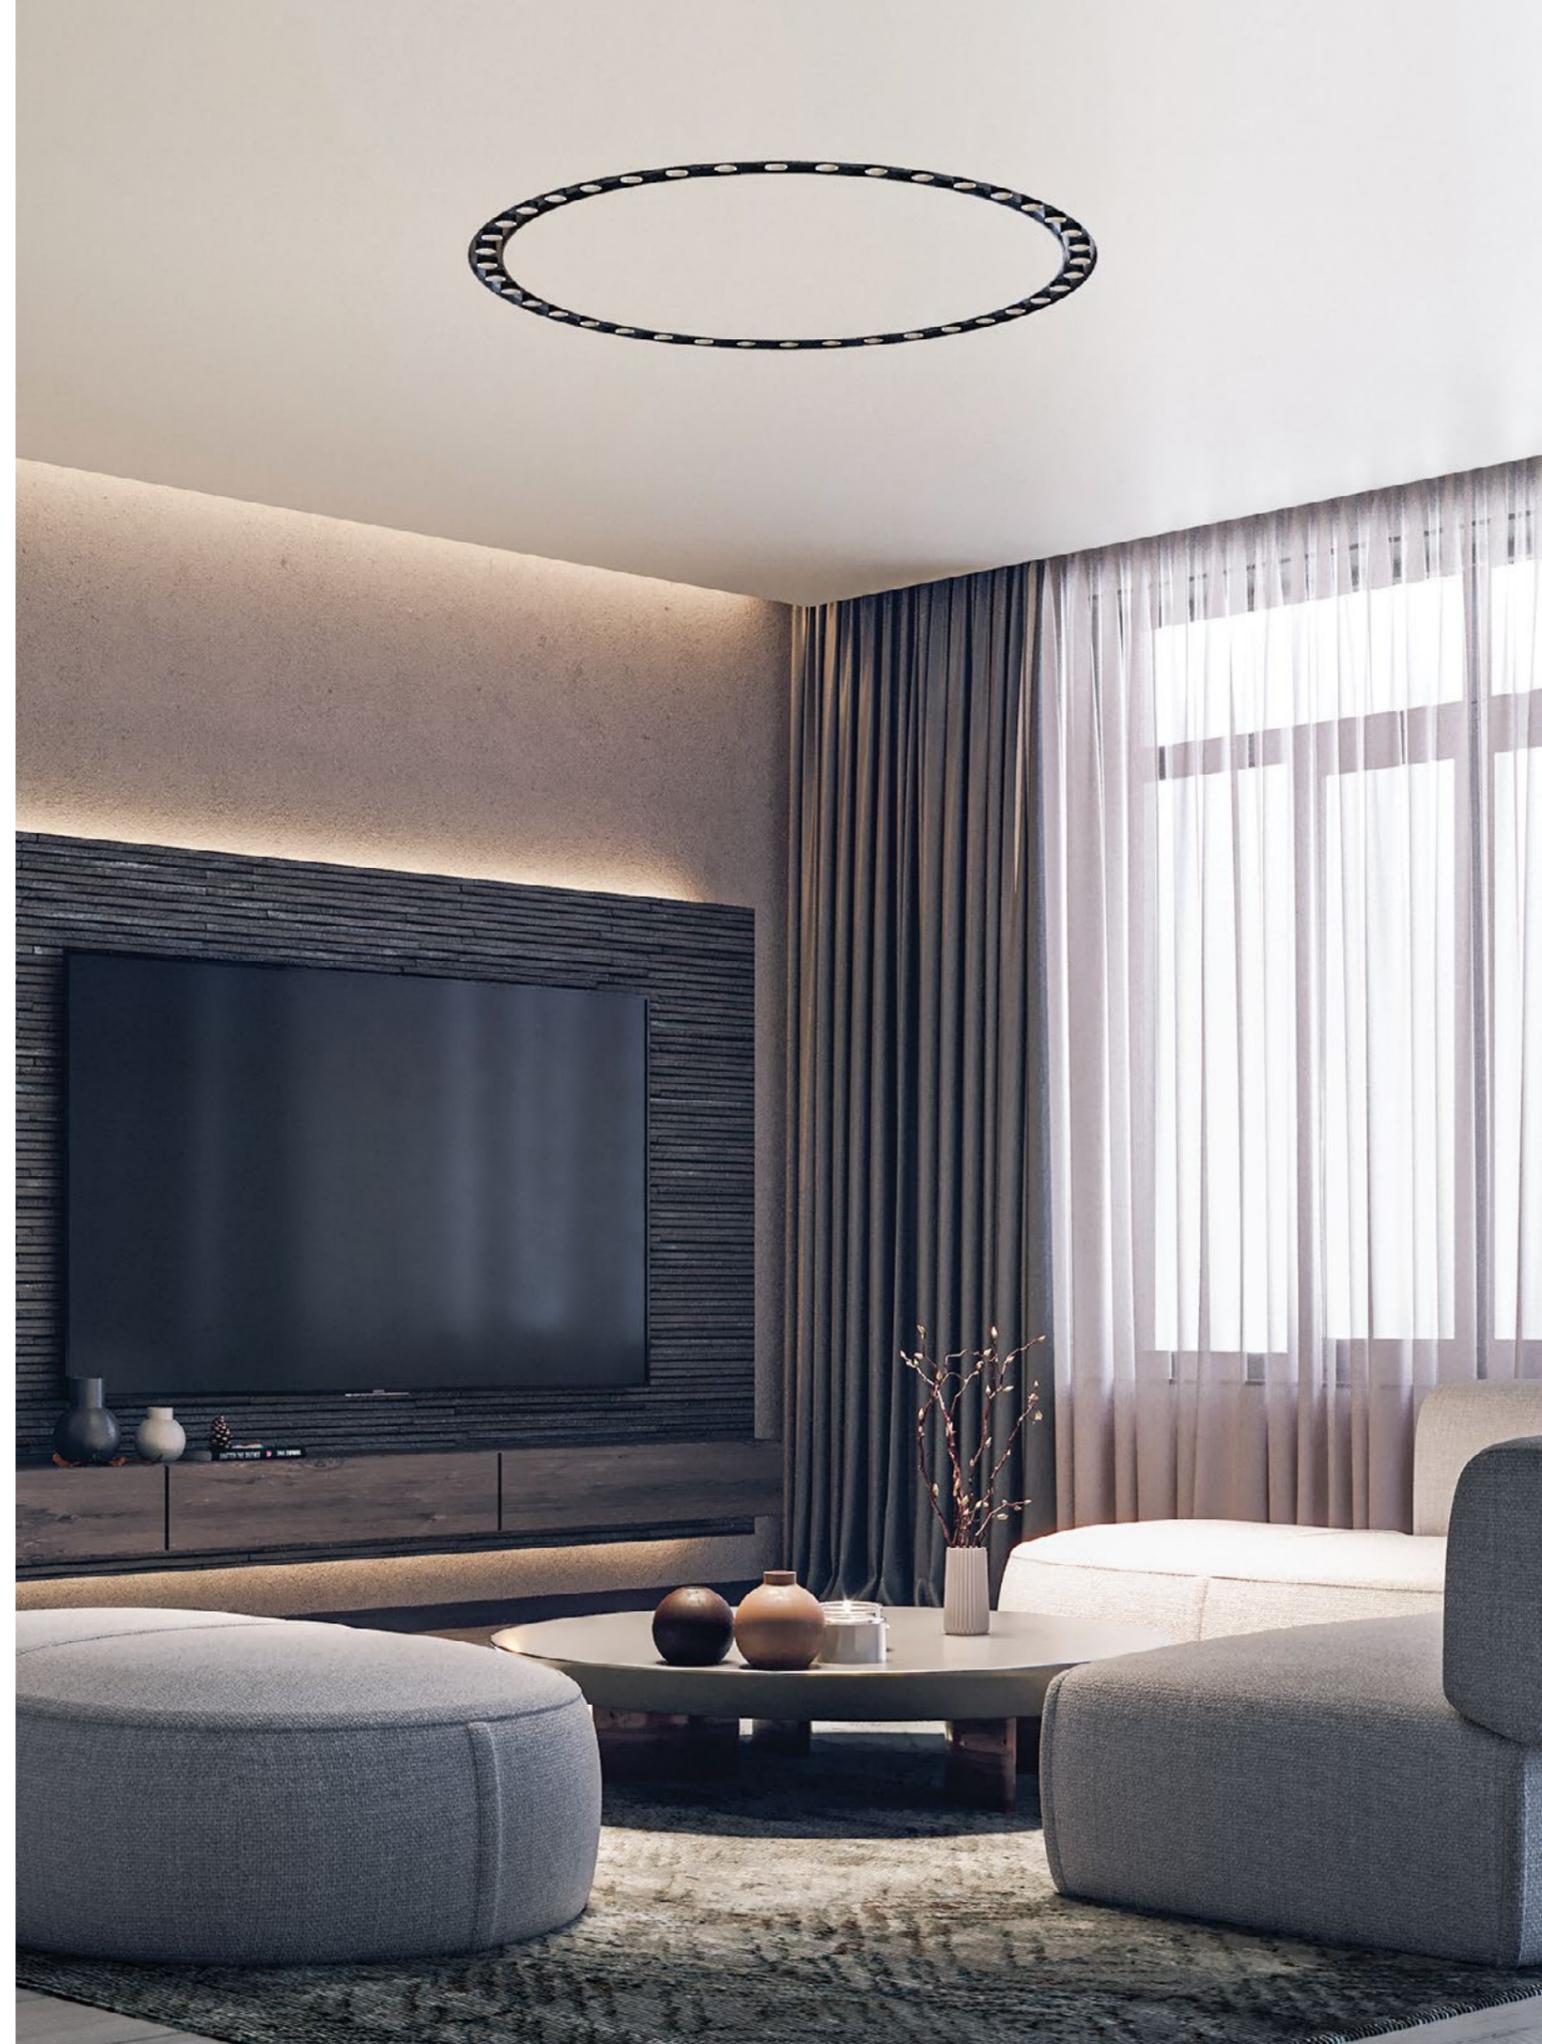

PINTO-L




-  **NP L 611 PMIT/PM**
Ø60x115 mm | 7 w | 532 lm
Customizable
-  **NP L 617 PMIT/PM**
Ø60x170 mm | 10 w | 798 lm
Customizable
-  **NP L 622 PMIT/PM**
Ø60x225 mm | 12 w | 1064 lm
Customizable
-  **NP S 1111 PMIT/PM**
Ø115x115 mm | 12 w | 1064 lm
Customizable



PINTO-R

Section View

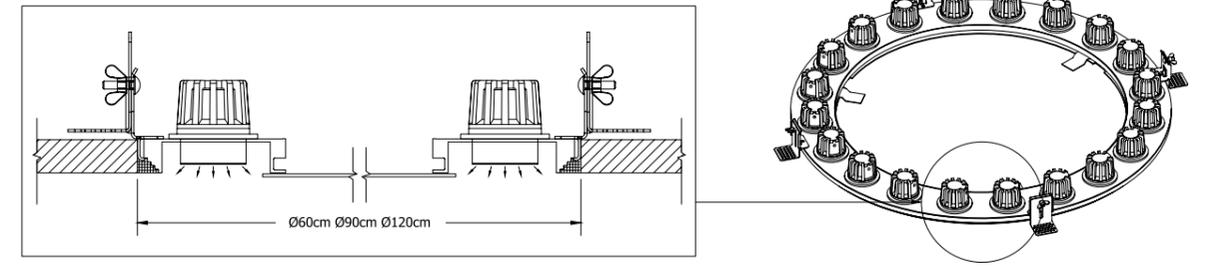


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Diameter (mm) |
|-------------|-----------|-----------------|--------------------|------------------|---------------|
| NP 60 Pmit | 37 | 100.6 | 3724 | 15°/38°/60°/ SYM | Ø 600 |
| NP 90 Pmit | 57 | 102.7 | 5852 | 15°/38°/60°/ SYM | Ø 900 |
| NP 120 Pmit | 77 | 103.6 | 7980 | 15°/38°/60°/ SYM | Ø 1200 |

PINTO-L

Section View

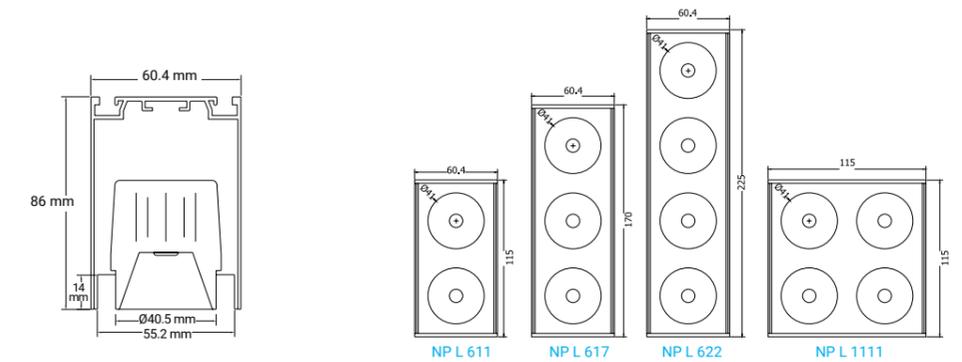

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|----------------|-----------|-----------------|--------------------|------------------|----------------|
| NP L 611 PMIT | 7 | 76 | 532 | 15°/38°/60°/ SYM | 60.4 x 115 |
| NP L 617 PMIT | 10 | 79.8 | 798 | 15°/38°/60°/ SYM | 60.4 x 170 |
| NP L 622 PMIT | 12 | 88.6 | 1064 | 15°/38°/60°/ SYM | 60.4 x 225 |
| NP S 1111 PMIT | 12 | 88.6 | 1064 | 15°/38°/60°/ SYM | 115 x 115 |
| NP L 611 PM | 7 | 76 | 532 | 15°/38°/60°/ SYM | 60.4 x 115 |
| NP L 617 PM | 10 | 79.8 | 798 | 15°/38°/60°/ SYM | 60.4 x 170 |
| NP L 622 PM | 12 | 88.6 | 1064 | 15°/38°/60°/ SYM | 60.4 x 225 |

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|----------------|---|-----------------|--------------------|------------------|----------------|
| NP SIN MODULE | 3.5 | 76 | 266 | 15°/38°/60°/ SYM | Custom |
| NP DOU MODULE | 7 | 76 | 532 | 15°/38°/60°/ SYM | Custom |
| NP TRI MODULE | 10 | 79.8 | 798 | 15°/38°/60°/ SYM | Custom |
| NP L H ... AL | Surfaced mount custom length pinto line profile | | | | |
| NP L H ... ALI | Recessed custom length pinto line profile | | | | |
| NP L H ... ALP | Pendant custom length pinto line profile | | | | |

PICO




NPIC SIN ... PMi
 Ø 40x79 mm | 8 w | 369 lm

NPIC DOU ... PMi
 Ø 133x41 mm | 10 w | 462 lm


NPIC QOU ... PMi
 Ø 133x41 mm | 14 w | 842 lm

UGR<9
 APERTURE SIZE 10 mm
 EFFICACY : 46-60 lm/W
 CRI : 90+
 BEAM ANGLES : 39°/56° SYM

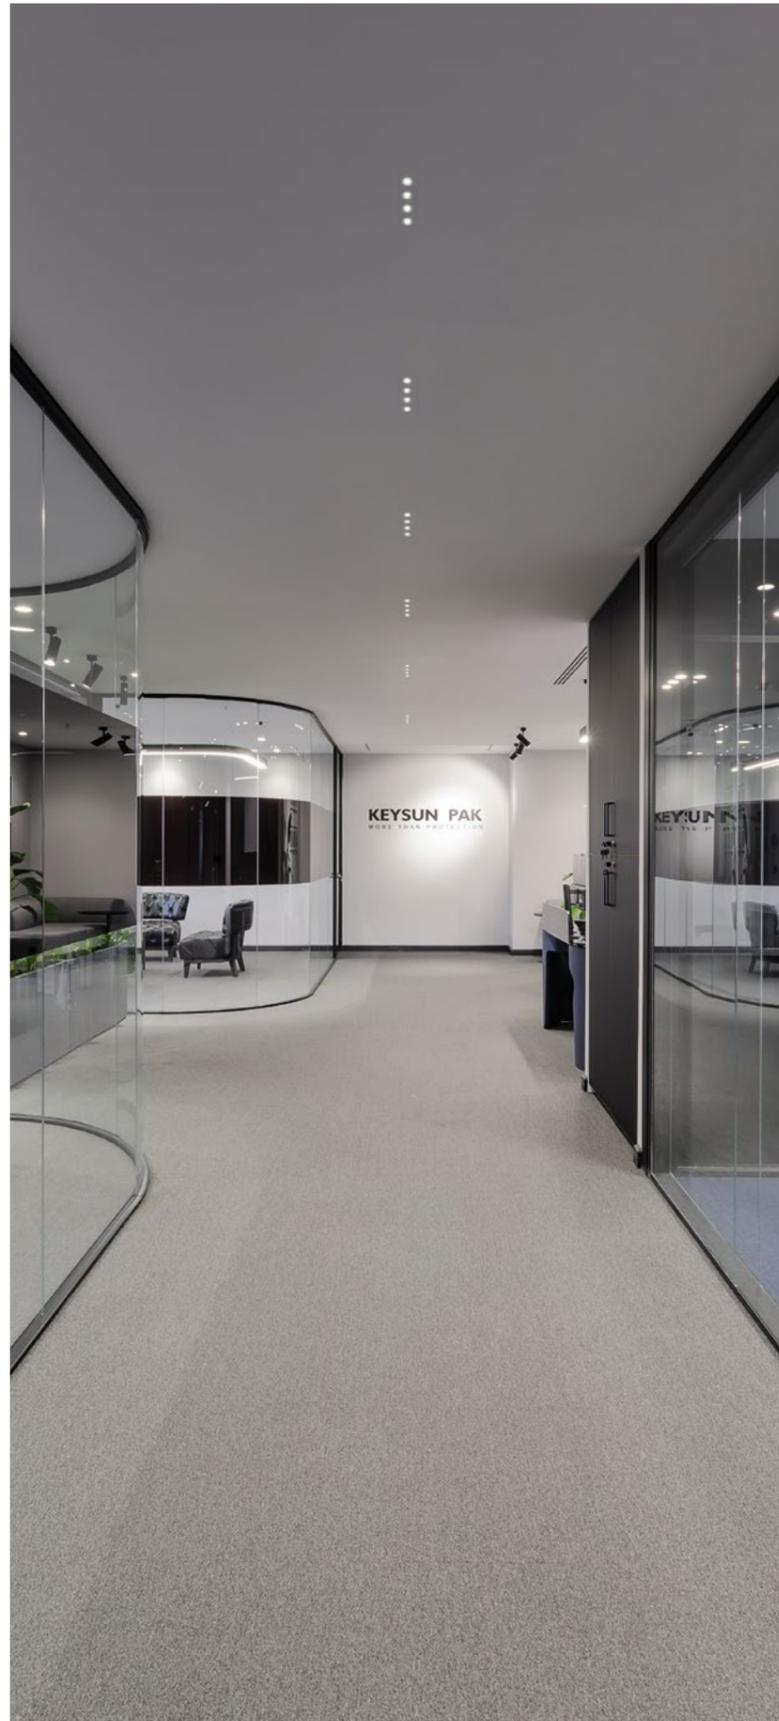

PICO

Section View

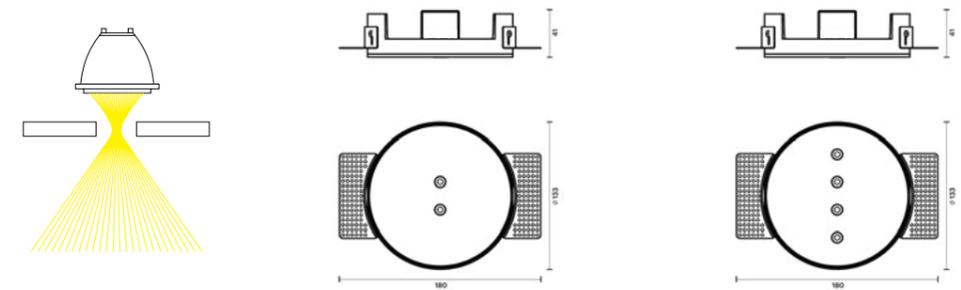

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|-----------------|-----------|-----------------|--------------------|---------|----------------|
| NPIC SIN 39 PMi | 8 | 48 | 369 | 39° SYM | Ø 40 x 79 |
| NPIC SIN 56 PMi | 8 | 48 | 369 | 56° SYM | Ø 40 x 79 |
| NPIC DOU 41 PMi | 10 | 46 | 462 | 41° SYM | Ø 133 x 41 |
| NPIC DOU 59 PMi | 10 | 46 | 462 | 59° SYM | Ø 133 x 41 |
| NPIC QOU 31 PMi | 14 | 60 | 842 | 31° SYM | Ø 133 x 41 |
| NPIC QOU 52 PMi | 14 | 60 | 842 | 52° SYM | Ø 133 x 41 |



MELLOW



NME 60 36 Pmi

Ø 55 mm | up to 6.7 w | up to 513 lm
36° beam angle



NME 70 40 Pmi

Ø 65 mm | 8 w | up to 893 lm
40° beam angle



NME 80 40 Pmi

Ø 75 mm | 10 w | 1230 lm
40° beam angle | cut: Ø80mm




rotatable fixing fasteners



Trimless installation in plaster board






installation
more information
3D object

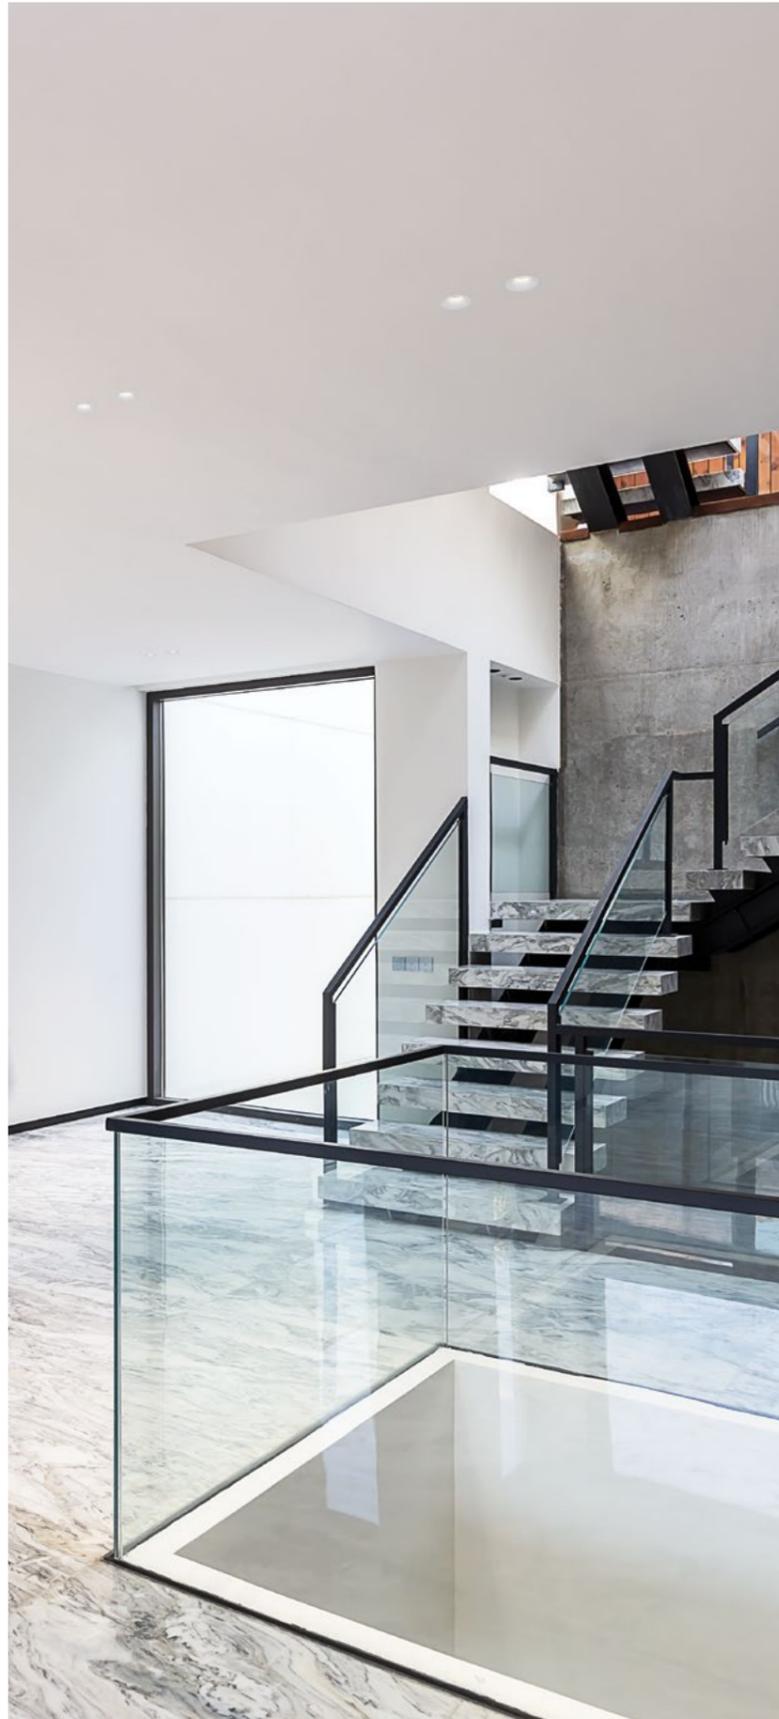

MELLOW

Section View

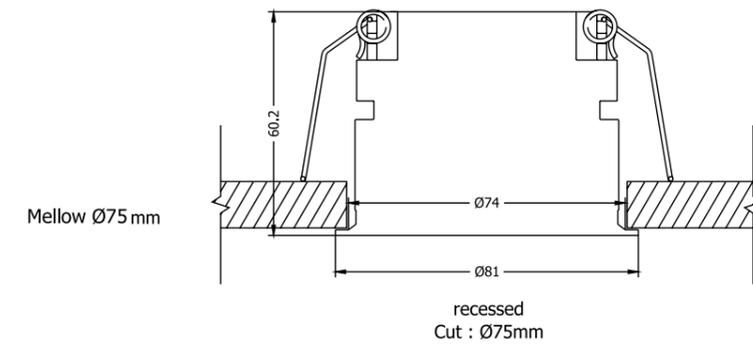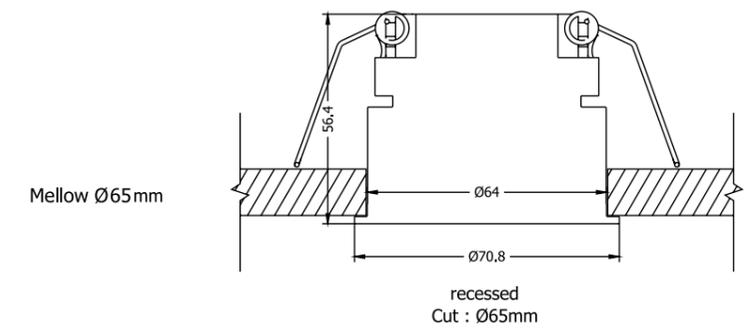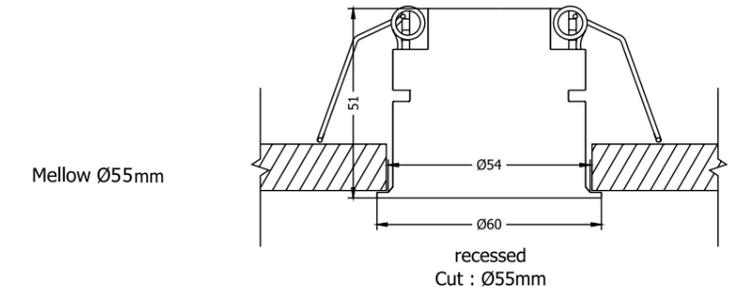

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Diameter (mm) |
|---------------|-----------|-----------------|--------------------|---------|---------------|
| NME 60 36 Pmi | 5 | 123 | 615 | 36° SYM | Ø 55 |
| NME 70 36 Pmi | 8 | 123 | 984 | 36° SYM | Ø 65 |
| NME 80 36 Pmi | 10 | 123 | 1230 | 36° SYM | Ø 75 |



Watch Video
installation

NEXO




NEX 55 36 Pmr
 Ø 69.8 mm | 6 w | 588 lm
 36° beam angle | cut: Ø55mm



NEXO

Section View

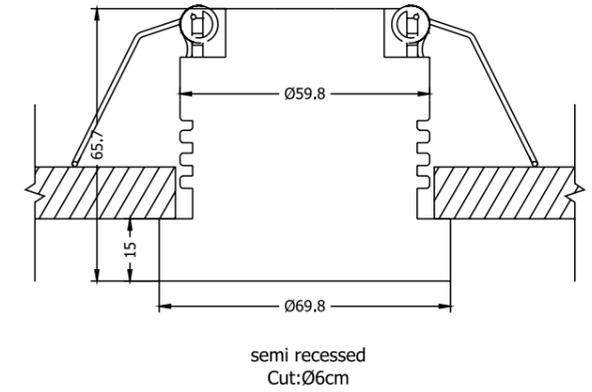

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|------------|-----------|-----------------|--------------------|---------|----------------|
| NEX 36 Pmr | 6 | 98 | 588 | 36° SYM | Ø 69.8 x 65.7 |



CUBE




 **NCU 8080 PC**
80 x 80 mm | 10 w | 853 lm
38° beam angle



CUBE

Section View

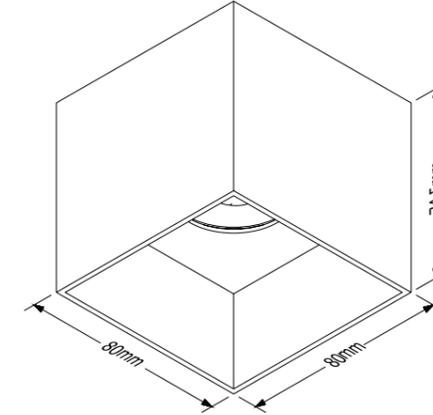

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|-------------|-----------|-----------------|--------------------|---------|----------------|
| NCU 8080 PC | 10 | 85.30 | 853 | 38° SYM | 80 x 80 |



SLIDE




NSLI 60
 Ø 60mm | up to 10 w | up to 1230 lm
 20°, 30°, 50° beam angle
 cut: 90mm



rotatable fixing fasteners



recessed housing



Trimless installation in plaster board




installation
 more information
 3D object



SLIDE


Section View

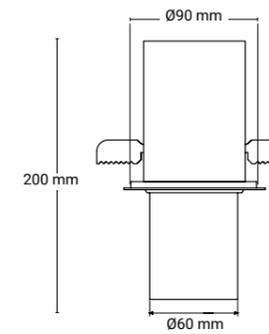


NSLI 60

Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Cutting Diameter (mm) |
|-----------------------|-----------|-----------------|--------------------|---------|-----------------------|
| NSLI 60 20 R PCI (H1) | 5.5 (10) | 80.5 (123) | 443 (1230) | 20° SYM | Ø 90 |
| NSLI 60 30 R PCI (H1) | 5.5 (10) | 80.5 (123) | 443 (1230) | 30° SYM | Ø 90 |
| NSLI 60 50 R PCI (H1) | 5.5 (10) | 80.5 (123) | 443 (1230) | 50° SYM | Ø 90 |



NSLI 60 20 R PCI



NSLI 60 30 R PCI



NSLI 60 50 R PCI



NSLI 60 20 R PCI



NSLI 60 30 R PCI



NSLI 60 50 R PCI



TRIMO-C



NTR C 60 36 ALIT
 Ø60 mm | up to 6.7 w | up to 650 lm
 cut: Ø60mm

NTR C 78 36 ALIT
 Ø80 mm | up to 10 w | up to 975 lm
 cut: Ø80mm

NTR C 100 36 ALIT
 Ø100 mm | up to 20 w | up to 1891 lm
 cut: Ø100mm

NTR C ... 36 ALI
 Ø60 mm | up to 6.7 w | up to 650 lm
 cut: Ø60mm

NTR C ... 36 ALI
 Ø80 mm | up to 10 w | up to 975 lm
 cut: Ø80mm

NTR C ... 36 ALI
 Ø100 mm | up to 20 w | up to 1891 lm
 cut: Ø100mm



Frameless installation with adjustable brackets




installation
 more information
 3D object



Panorama Residential Building

TRIMO-S

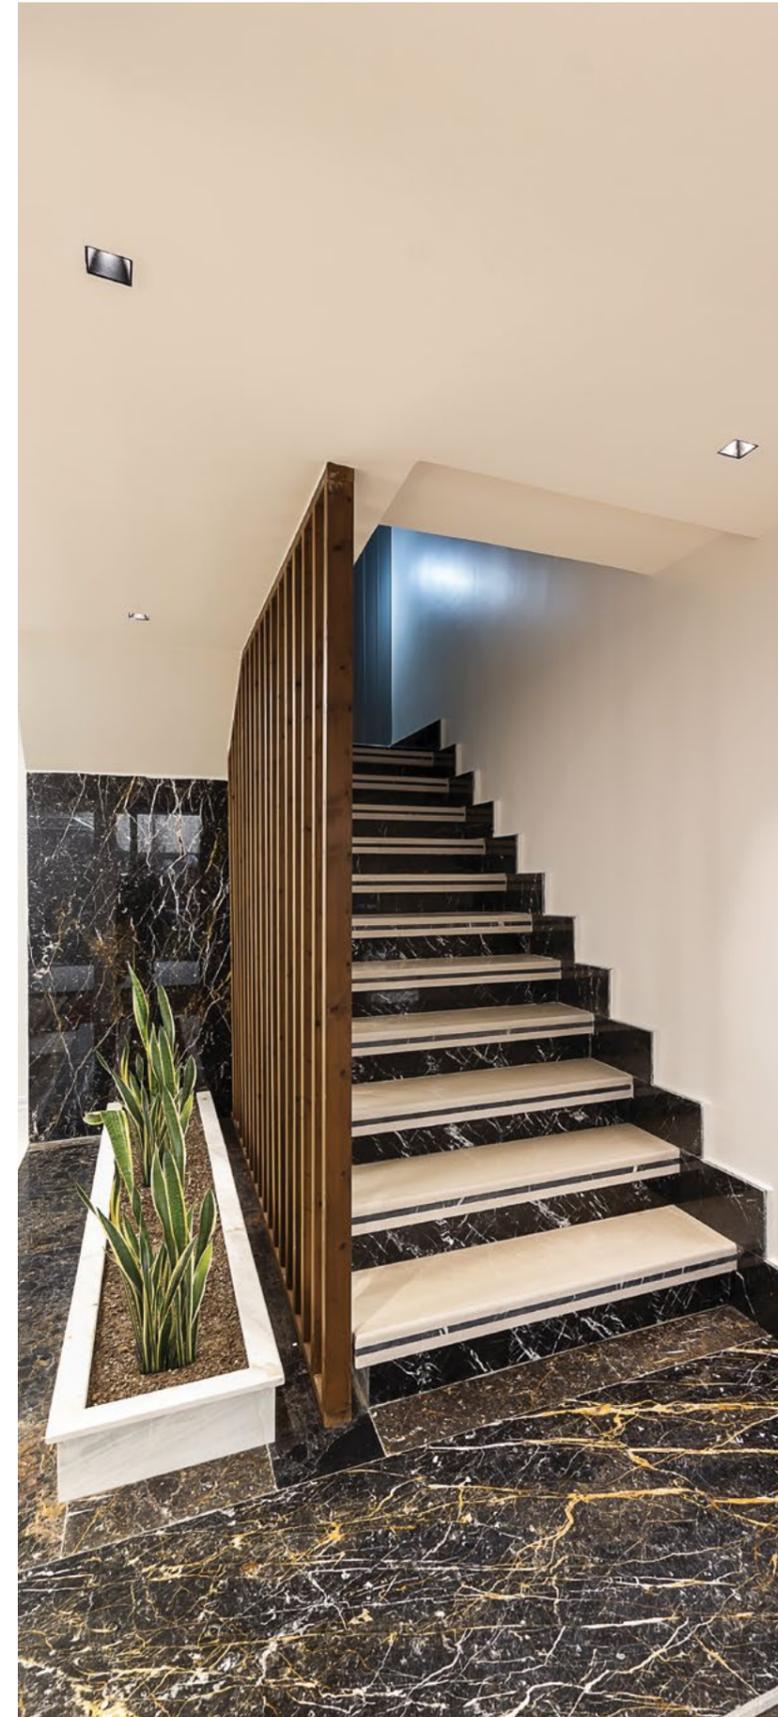


NTRS 7878 ALIT
 80 x 80 mm | up to 10 w | up to 1144 lm
 cut: 80x80mm

NTRS 8484 ALI
 80 x 80 mm | up to 10 w | up to 1144 lm
 36° beam angle |
 cut: 80x80mm



Framed option on request



Framed installation Using springs



Frameless installation with adjustable brackets




installation
 more information
 3D object



Watch Video Residential house

TRIMO

Section View

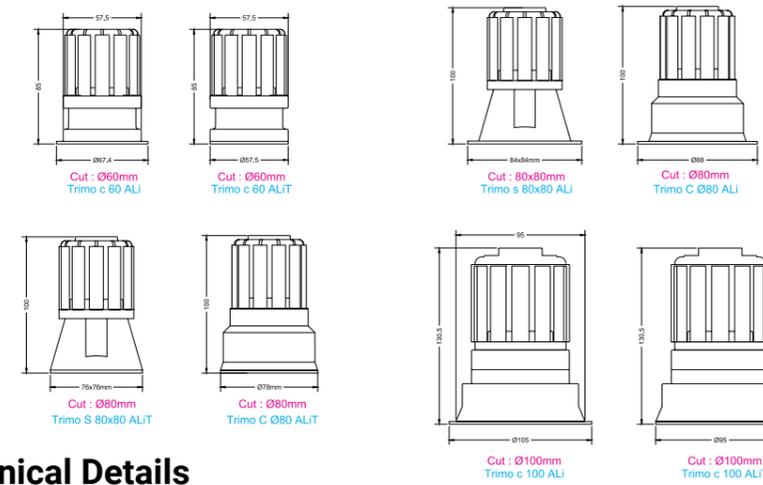

Mounting Frame

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Cutting Size (mm) |
|-----------------------|-----------|-----------------|--------------------|---------|-------------------|
| NTR C 60 36 ALiT | 6.7 | 97 | 650 | 36° SYM | Ø 60 |
| NTR C 78 36 ALiT (H1) | 5 (10) | 100 (97.5) | 500 (975) | 36° SYM | Ø 80 |
| NTR C 100 36 ALiT | 20 | 94.55 | 1891 | 36° SYM | Ø 100 |
| NTR C 60 36 Ali | 6.7 | 97 | 650 | 36° SYM | Ø 110 |
| NTR C 88 36 Ali (H1) | 5 (10) | 100 (97.5) | 500 (975) | 36° SYM | Ø 80 |
| NTR C 100 36 Ali | 20 | 94.55 | 1891 | 36° SYM | Ø 100 |
| NTR S 7878 ALiT (H1) | 6 (10) | 117 (114) | 704 (1144) | 36° SYM | 80 X 80 |
| NTR S 84 84 Ali (H1) | 6 (10) | 117 (114) | 704 (1144) | 36° SYM | 80 X 80 |
| NTR W C 80 ALIT | 10 | 114 | 1144 | - | Ø 80 |

Installation Instruction



Watch Video installation

Distance between luminaires

| | Height | 2.8 m | 3.5 m | 4.2 m |
|--------------|----------|-------|-------|-------|
| TRIMO C 78 | distance | 2.5 m | 2.5 m | 2.5 m |
| TRIMO S 7878 | distance | 2 m | 2.5 m | 2.5 m |

ELVA



 **NELV 60 WW Pci**
Ø 67 mm | up to 13 w | up to 942 lm
Wall wash - Asymmetric beam angle




 **Installation**
more information
3D object



ELVA

Section View

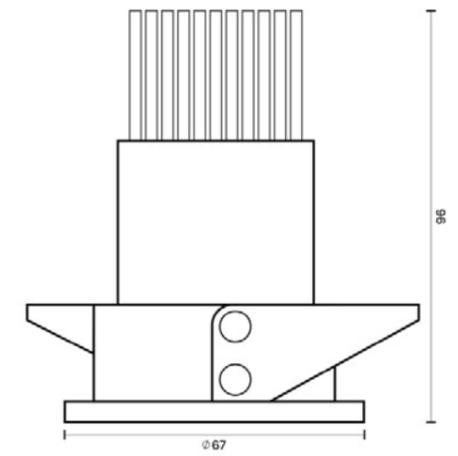

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimensions (mm) |
|----------------|-----------|-----------------|--------------------|-----------------|
| NELV 60 WW Pci | 13 | 74 | 942 | Ø 67 x 96 |



LENZA



NLZ 416 PMI
 45 x 166 mm | up to 9 w | up to 1001 lm
 50°, 80° beam angle
 cut: 48x168mm



NLZ 428 PMI
 45 x 285 mm | up to 13 w | up to 1780 lm
 50°, 80° beam angle
 cut: 50x290mm



NLZ 456 PMI
 45 x 566 mm | up to 26 w | up to 3560 lm
 50°, 80° beam angle
 cut: 50x570mm



TW 2700 - 5000 K



Up to 80° symmetric beam angle



easy installation with springs



installation
 more information
 3D object



Arslam Construction Company

LENZA TRIMLESS



NLZ 332 36 PCiT
 34 x 640 | 15w | up to 1500 lm



NLZ 364 36 PCiT
 34 x 320mm | 30w | up to 3000 lm





TW 2700 - 5000 K

installation
 more information
 3D object



LENZA SQUARE

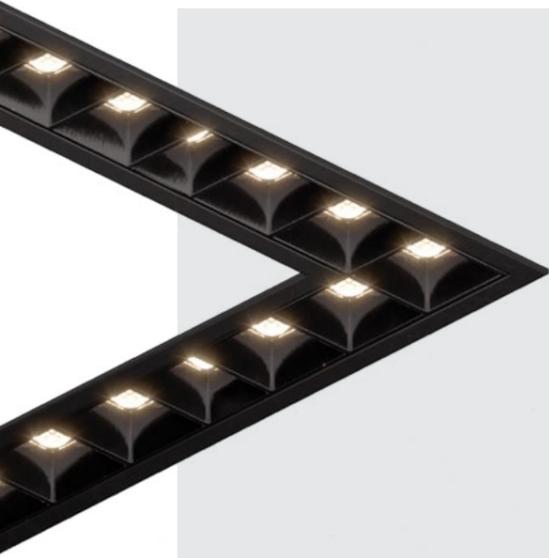

NLZ SQ 2828 ... PMi
324 x 324mm | up to 52 w | up to 4080 lm
50°, 80° beam angle
[cut: 330x330mm](#)




TW 2700 - 5000 K



Seamless joint connection



installation
more information
3D object

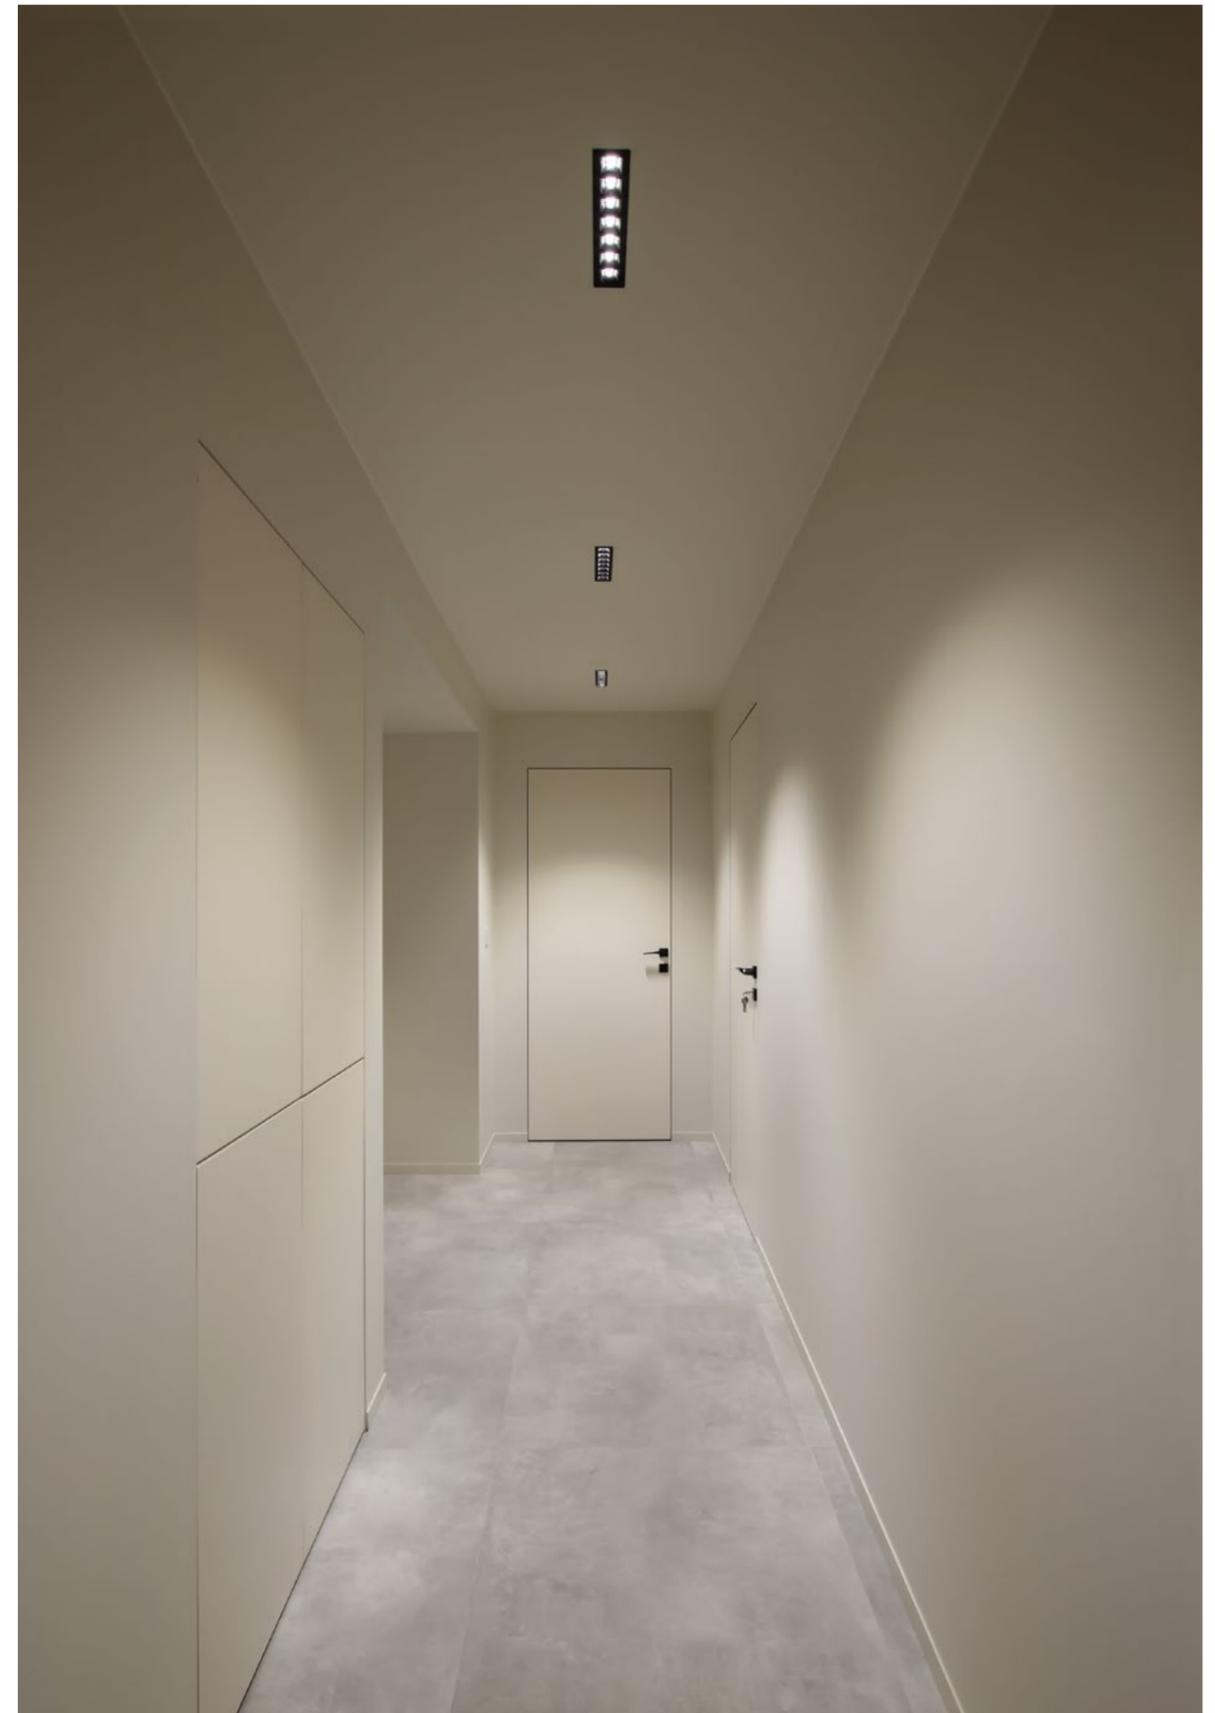

LINK SURFACE



NINK 210 PM
 Ø210 x 46 mm | 32 w | 3675 lm
 30° beam angle




NINK 165 PM
 Ø165 x 46 mm | 18 w | 1890 lm
 30° beam angle



LENZA & LENZA SQ

Section View

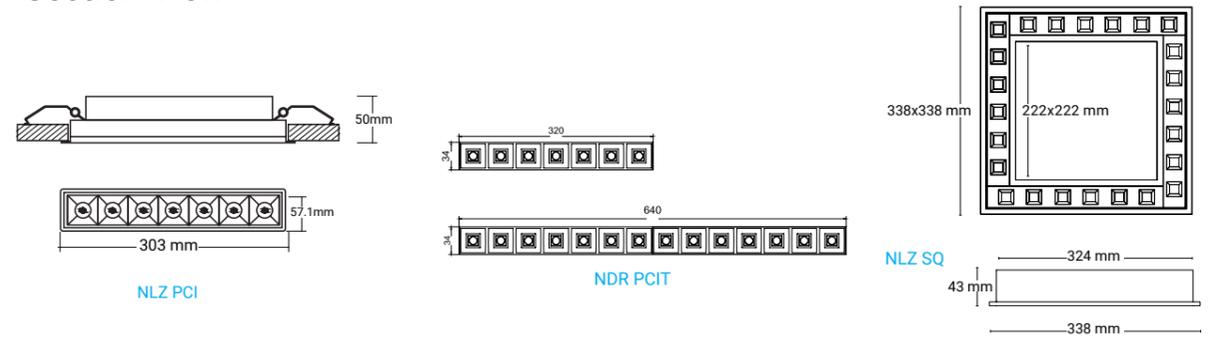

Lenza Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Cutting Size (mm) |
|----------------|-----------|-----------------|--------------------|--------------|-------------------|
| NLZ 332 Δ PCIT | 9 w | 111 Lm/w | 1001 Lm | 50°/ 80° SYM | 48 x 168 |
| NLZ 416 Δ PMI | 9 w | 111 Lm/w | 1001 Lm | 50°/ 80° SYM | 48 x 168 |
| NLZ 428 Δ PMI | 13 w | 136 Lm/w | 1780 Lm | 50°/ 80° SYM | 50 x 290 |
| NLZ 456 Δ PMI | 26 w | 136 Lm/w | 3560 Lm | 50°/ 80° SYM | 50 x 570 |

Δ : Beam angle: °50 or °80

Lenza Trimless Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|-----------------|-----------|-----------------|--------------------|----------------|
| NLZ 332 36 PCIT | 15 | 100 | 1500 | 34 x 320 |
| NLZ 364 36 PCIT | 30 | 100 | 3000 | 34 x 640 |


Lenza SQ Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|------------------------|-----------|-----------------|--------------------|--------------|----------------|
| NLZ SQ 2828 Δ PMI (H1) | 26 (52) | 78.5 | 2039 (4080) | 50°/ 80° SYM | 280 x 280 x 40 |

H1: Higher wattage Δ : Beam angle: °50 or °80

LINK SURFACE MOUNT

Section View

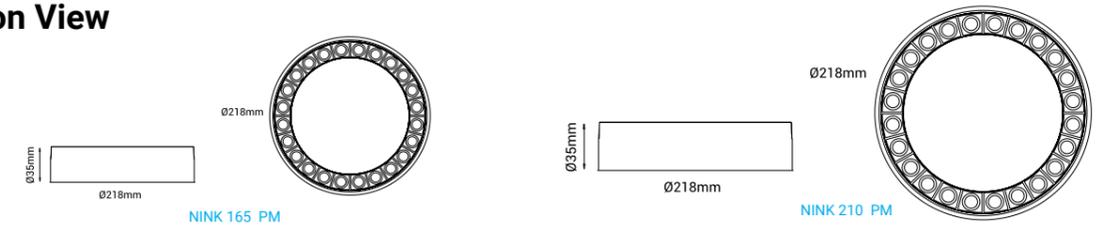

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|-------------|-----------|-----------------|--------------------|---------------|
| NINK 165 PM | 18 | 105 | 1890 | Ø 165 |
| NINK 210 PM | 32 | 105 | 3675 | Ø 210 |




installation

ECHO




| | |
|---|---|
|  | NEC 80 DC PMI Ø75 mm 6.8 w 501 lm cut: Ø80 mm |
|  | NEC 100 DC PMI Ø94 mm 9 w 727 lm cut: Ø100 mm |
|  | NEC 120 DC PMI Ø115 mm 18 w 2070 lm cut: Ø120 mm |
|  | NEC 150 DC PMI Ø145 mm 19 w 1665 lm cut: Ø150 mm |
|  | NEC 200 DC PMI Ø195 mm 26 w 2445 lm cut: Ø200 mm |

 [installation more information 3D object](#)



ECHO

Section View

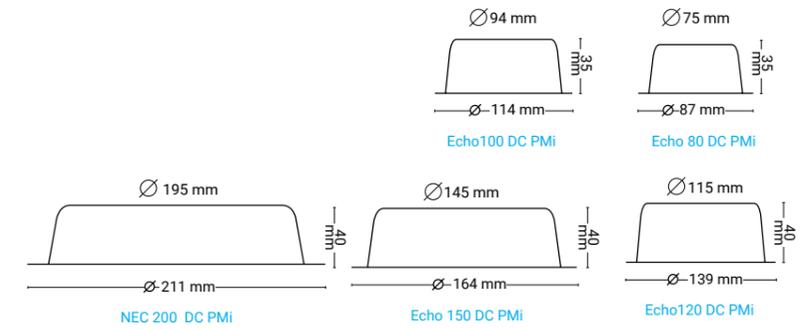


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Cutting (mm) |
|----------------|-----------|-----------------|--------------------|--------------|
| NEC 80 DC PMI | 6.8 | 73.6 | 501 | Ø80 |
| NEC 100 DC PMI | 9 | 80.8 | 727 | Ø100 |
| NEC 120 DC PMI | 18 | 115 | 2070 | Ø123 |
| NEC 150 DC PMI | 19 | 87.6 | 1665 | Ø150 |
| NEC 200 DC PMI | 26 | 94 | 2445 | Ø200 |

PMI: recessed

Installation Instruction

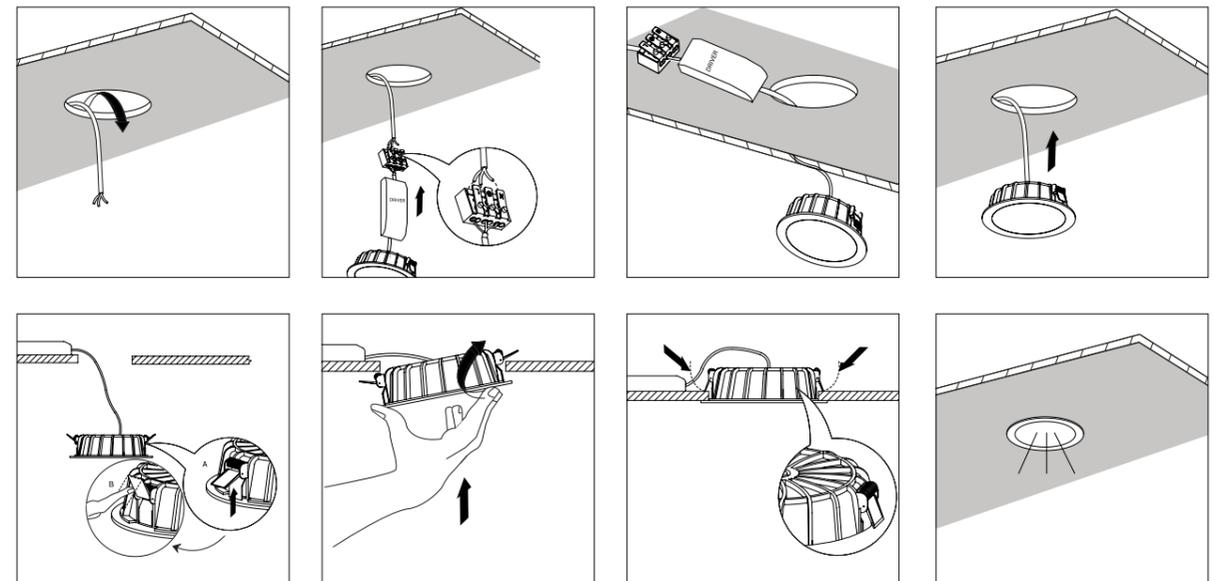

For a space with dimensions of MF (0.8) g RF (0.7, 0.5, 0.2) 10 g x 10 x 2.8 m

| illuminance target level | 100 lx | 300 lx | 500 lx | 750 lx |
|--------------------------|--------|--------|--------|--------|
| ECHO 100 | 19 | 57 | 95 | 142 |
| ECHO 150 | 8 | 24 | 41 | 62 |
| ECHO 200 | 6 | 17 | 28 | 42 |



ECHO PLUS IP44



NEC 100 PM
Ø100 x 100 mm | 9 w | 727 lm



NEC 140 PM
Ø140 x 160 mm | 19 w | 1665 lm



NEC 100 ... AL
Ø100 x 100 mm | 11 w | 1287 lm
20°, 32°, 60° beam angle



NEC 140 ... AL
Ø140 x 160 mm | 28 w | 3652 lm
18°, 23°, 40° beam angle



SILVA



NS 40 L PC/PCP
H x Ø40 mm | 5.5 w | 443 lm
32°, 47°, 60° beam angle



NS 60 L PC/PCP
H x Ø60 mm | 10 w | 1230 lm
20°, 30°, 50° beam angle




NS 90 L PC/PCP
H x Ø90 mm | 27w | 3268 lm
20°, 32°, 60° beam angle



Available with Jute Cable



Colorful ring on request

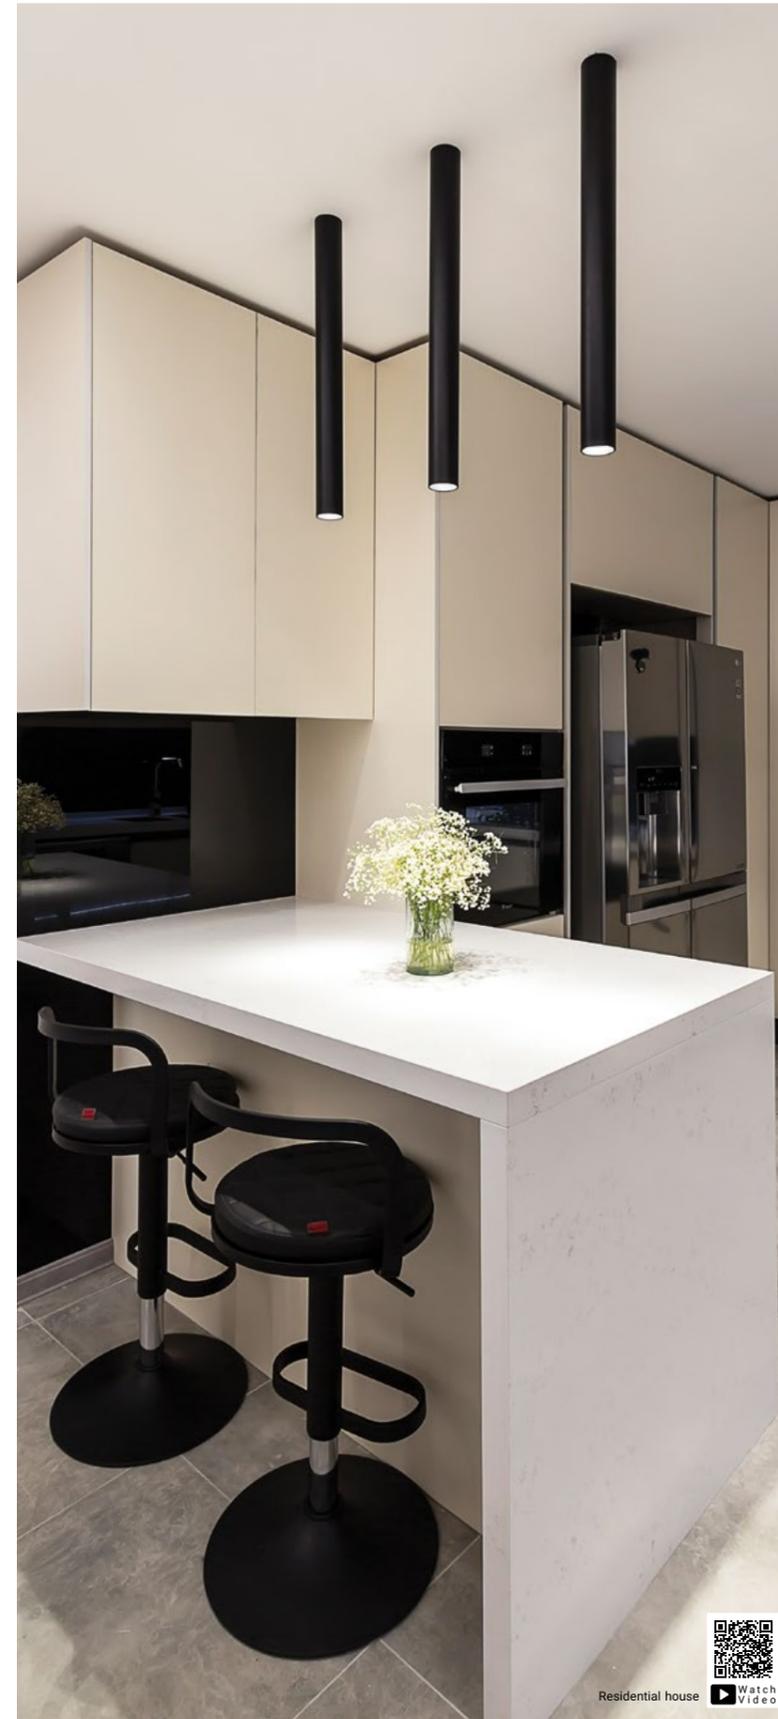

UNIQUE



NV 40 PC
 Ø40 mm | 5.5 w | 443 lm
 32°, 47°, 60° beam angle

NV 60 PC
 Ø60 mm | up to 10 w | up to 1230 lm
 20°, 30°, 50° beam angle

NV 90 PC
 Ø90 mm | 27 w | 3268 lm
 20°, 32°, 60° beam angle


 Colorful ring on request

 **installation**
 more information
3D object



UNIQUE 3PHASE TRACK MOUNT




NU 40 PCT
 Ø40 mm | 5.5 w | 443 lm
 32°, 47°, 60° beam angle

NU 60 PCT
 Ø60 mm | up to 10 w | up to 1230 lm
 20°, 30°, 50° beam angle

NU 90 PCT
 Ø90 mm | 27 w | 3268 lm
 20°, 32°, 60° beam angle

 **220v Track recessed**
 L x 52 x 37.8
 cut: 35mm


 **220v Track trimless recessed**
 L x 31.4 x 37.8
 cut: 32mm

 **220v Track surface mount**
 L x 31.4 x 37.8

 **installation**
 more information
3D object

ECHO PLUS

Section View

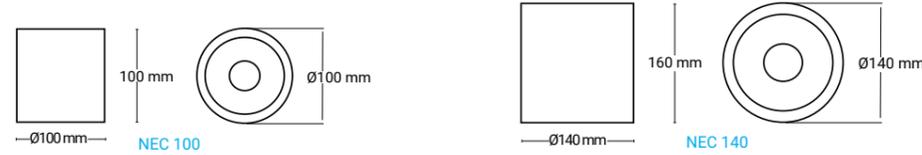

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|---------------|-----------|-----------------|--------------------|----------|----------------|
| NEC 100 20 AL | 11 | 117 | 1287 | 20° SYM | Ø100x100 mm |
| NEC 100 32 AL | 11 | 117 | 1287 | 32° SYM | Ø100x100 mm |
| NEC 100 60 AL | 11 | 117 | 1287 | 60° SYM | Ø100x100 mm |
| NEC 100 PM | 9 | 80.78 | 727 | DIFFUSED | Ø100x100 mm |
| NEC 140 18 AL | 28 | 130.4 | 3652 | 18° SYM | Ø160x140 mm |
| NEC 140 23 AL | 28 | 130.4 | 3652 | 23° SYM | Ø160x140 mm |
| NEC 140 40 AL | 28 | 130.4 | 3652 | 40° SYM | Ø160x140 mm |
| NEC 140 PM | 19 | 87.63 | 1665 | DIFFUSED | Ø160x140 mm |

PM : Surface for diffuser model


AL: Surface for reflector model



installation

SILVA

Section View

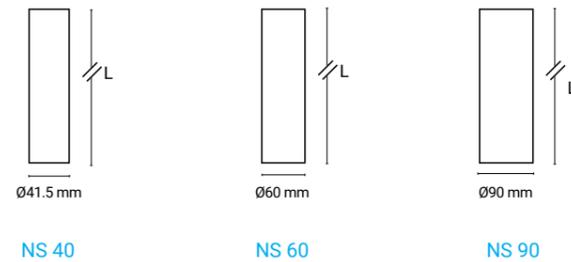

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|--------------------|------------|-----------------|--------------------|-----------------|----------------|
| NS 40 Δ L PC / PCP | 5.5 w | 80.5 | 443 | 32°/47°/60° SYM | Ø41.5 |
| NS 60 Δ L PC / PCP | 5.5 - 10 w | 80.5 - 123 | 443 - 1230 | 20°/30°/50° SYM | Ø60 |
| NS 90 Δ L PC / PCP | 27 w | 121.04 | 3268 | 20°/30°/50° SYM | Ø90 |

L: Available Lengths (96 mm, ... ,26 mm, 16 mm, 12 mm)


Δ: Available Beam Angle



installation

UNIQUE

Section View

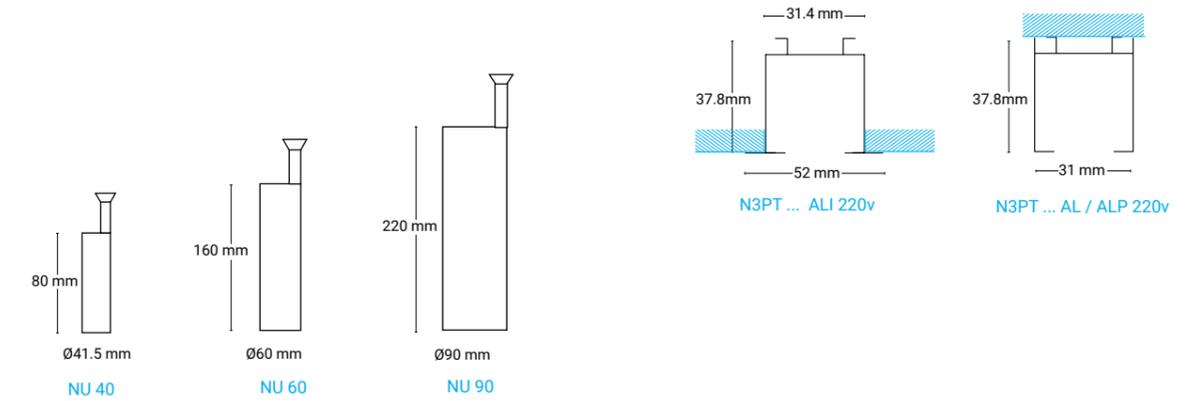

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|---------------------------|-----------|-----------------|--------------------|-----------------|----------------|
| NU 40 Δ PC/PCT/PCL | 5.5 | 80.5 | 443 | 32°/48°/60° SYM | Ø40x100 |
| NU 60 Δ R PC/PCT/PCL (H1) | 5.5 (10) | 80.5 (123) | 443 (1230) | 20°/30°/50° SYM | Ø60x160 |
| NU 90 Δ R PC/PCT/PCL | 27 | 121.04 | 3268 | 20°/32°/60° SYM | Ø90x220 |

PCT: track mount PC: surface PCL: For Spotline system H1: higher wattages Δ: Available Beam Angle

Track Accessories




installation

GLANCE



NGLA 48 ZOOM PCp
Ø48 x 148 mm | 6 w | 726 lm

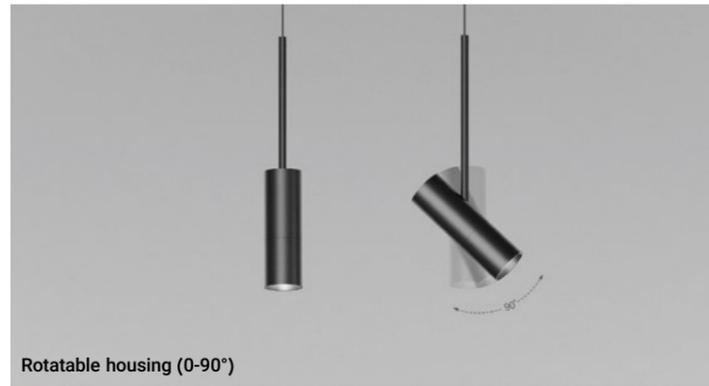


Rotatable housing (0-90°)



Available in various colors



Adjustable height

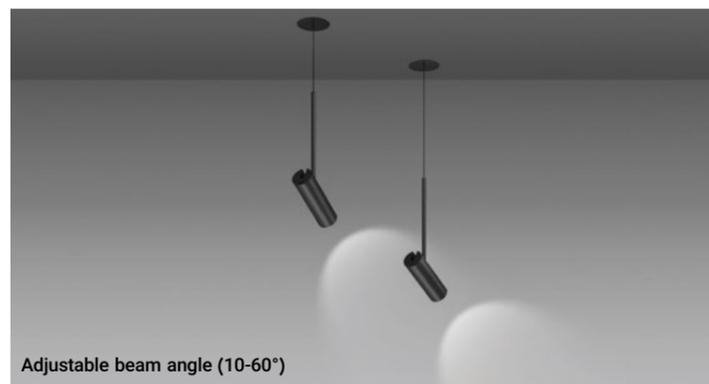

Adjustable beam angle (10-60°)



MOONICO

NMO 100 PMP
Ø100 mm | 6 w | 317 lm


up to 45° rotatable

Available with Jute Cable

installation
more information
3D object



DUKE

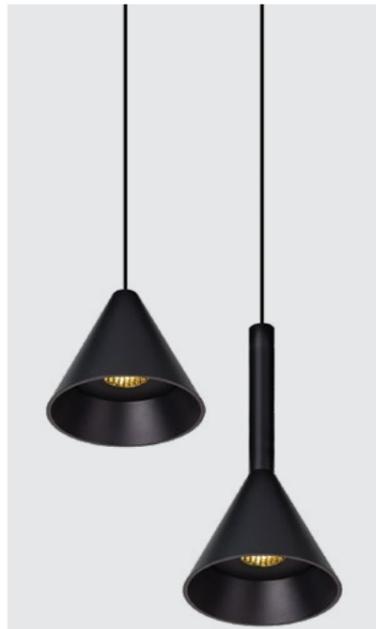



NDU 87 PCP
 Ø87 mm | 6 w | 610 lm
 36 ° beam angle



Available with Jute Cable



 installation
 more information
 3D object

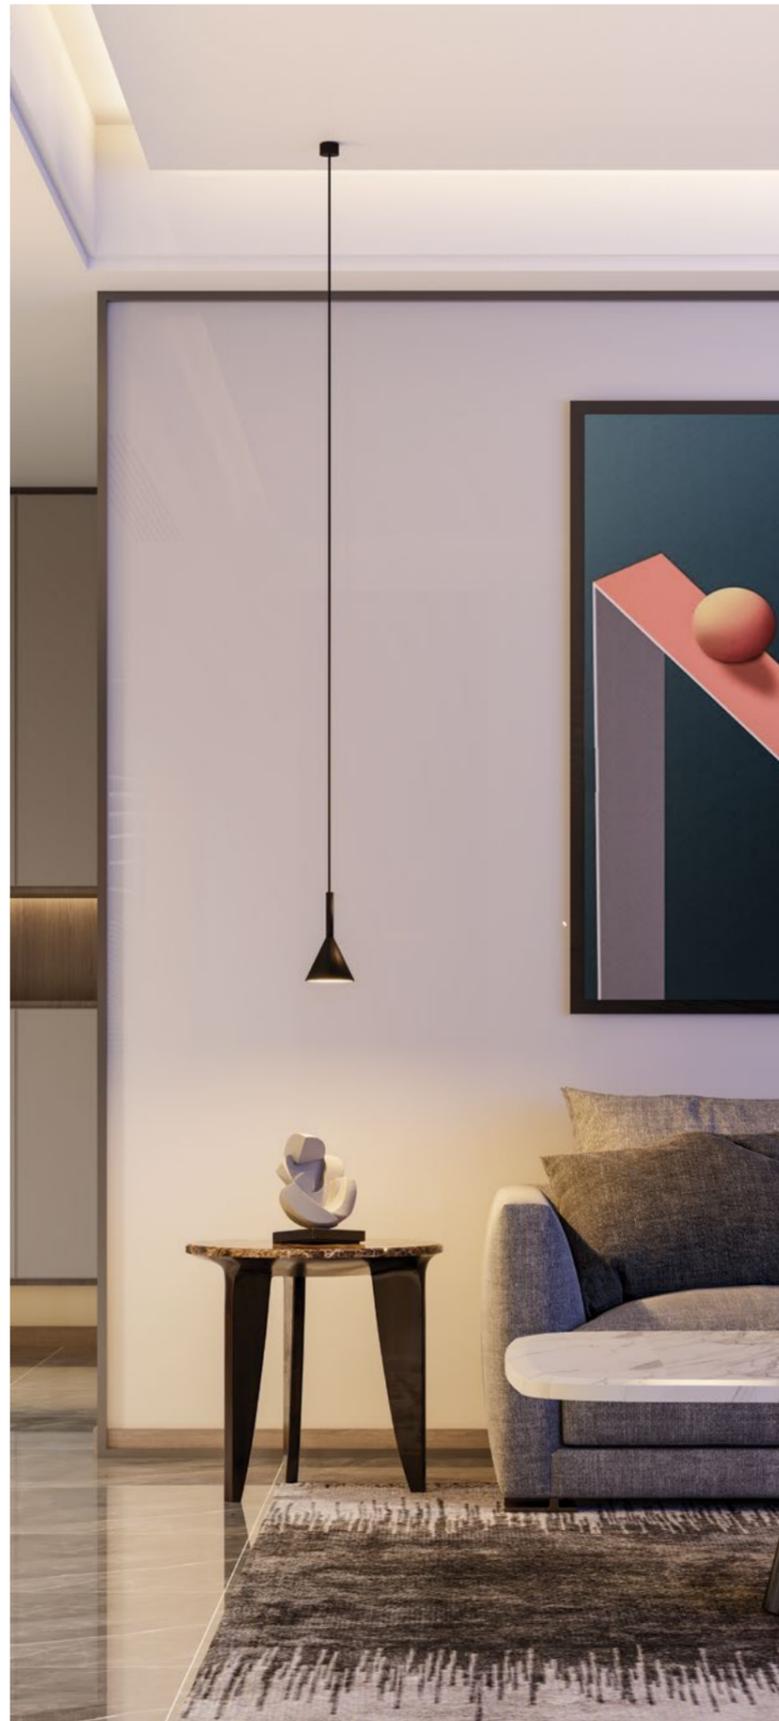

MOONICO

Section View



Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|-------------|-----------|-----------------|--------------------|---------------|
| NMO 100 PMP | 6 | 52.8 | 317 | Ø 100 |



 installation

DUKE

Section View

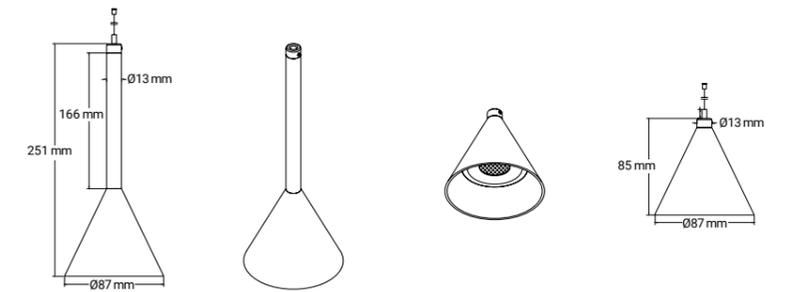

Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|------------|-----------|-----------------|--------------------|---------------|
| NDU 87 PCP | 6 | 102 | 610 | Ø 87 x 85 |



 installation

GLANCE

Section View

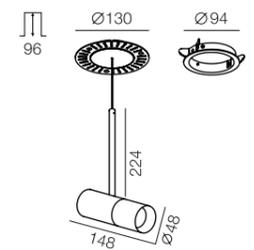


Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|------------------|-----------|-----------------|--------------------|---------------|
| NGLA 48 ZOOM PCp | 6 | 121 | 726 | Ø 48 x 148 |

FLEX TUBE


Silicon made Flex Tube light fixtures with IP67 dust and moisture resistance

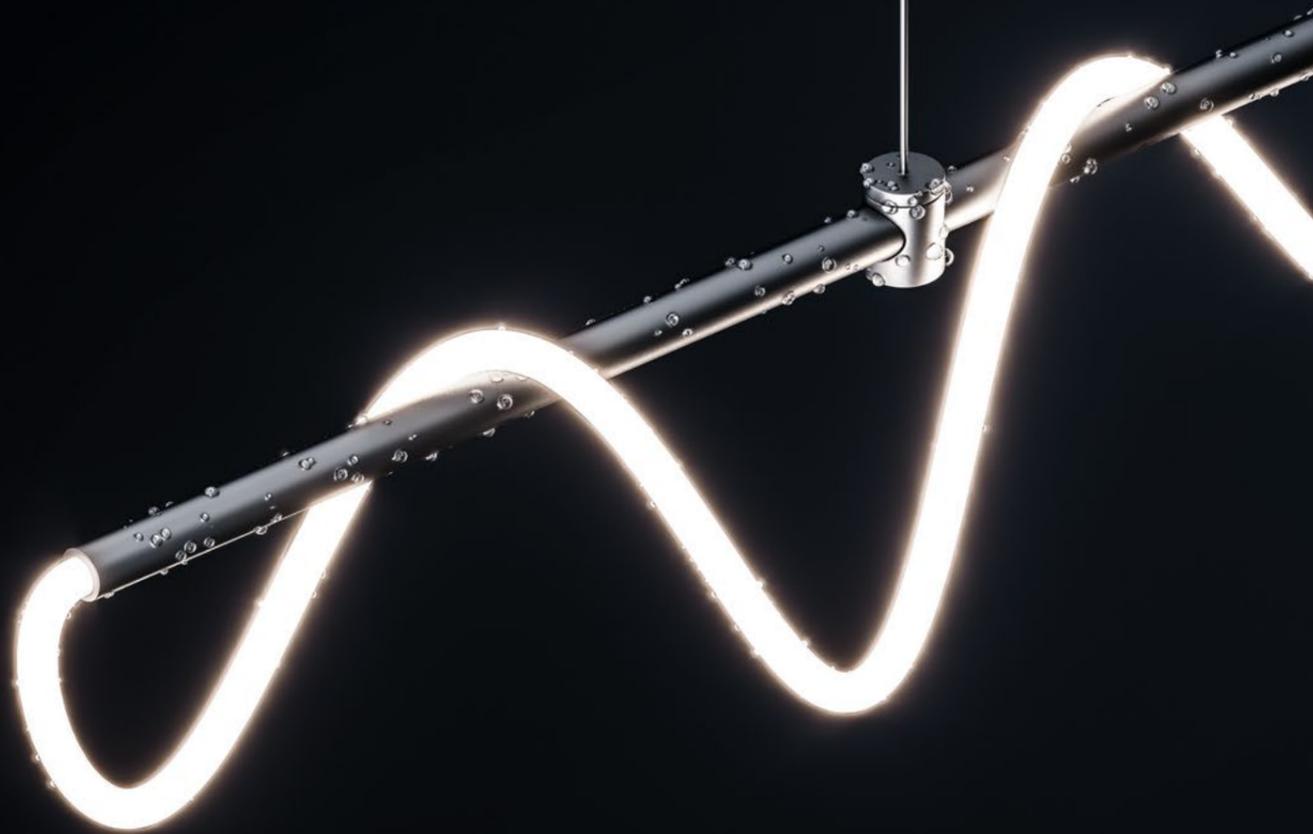


FLEX TUBE (IP67)

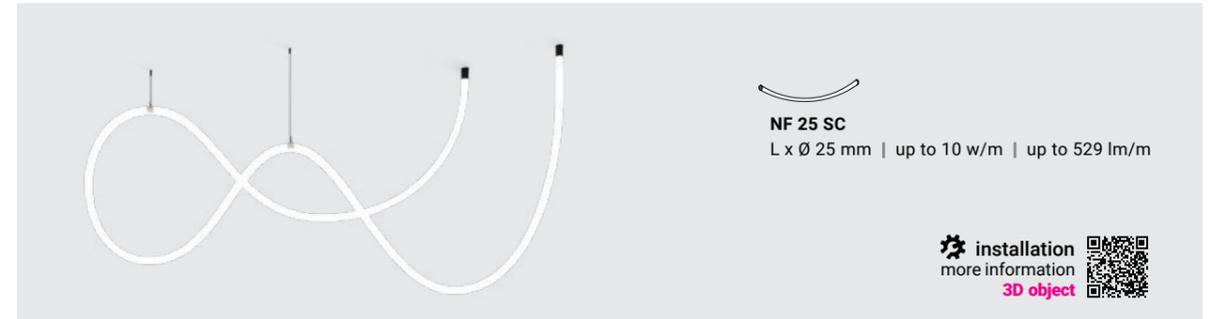


FLEX TUBE FEATURES (IP67)

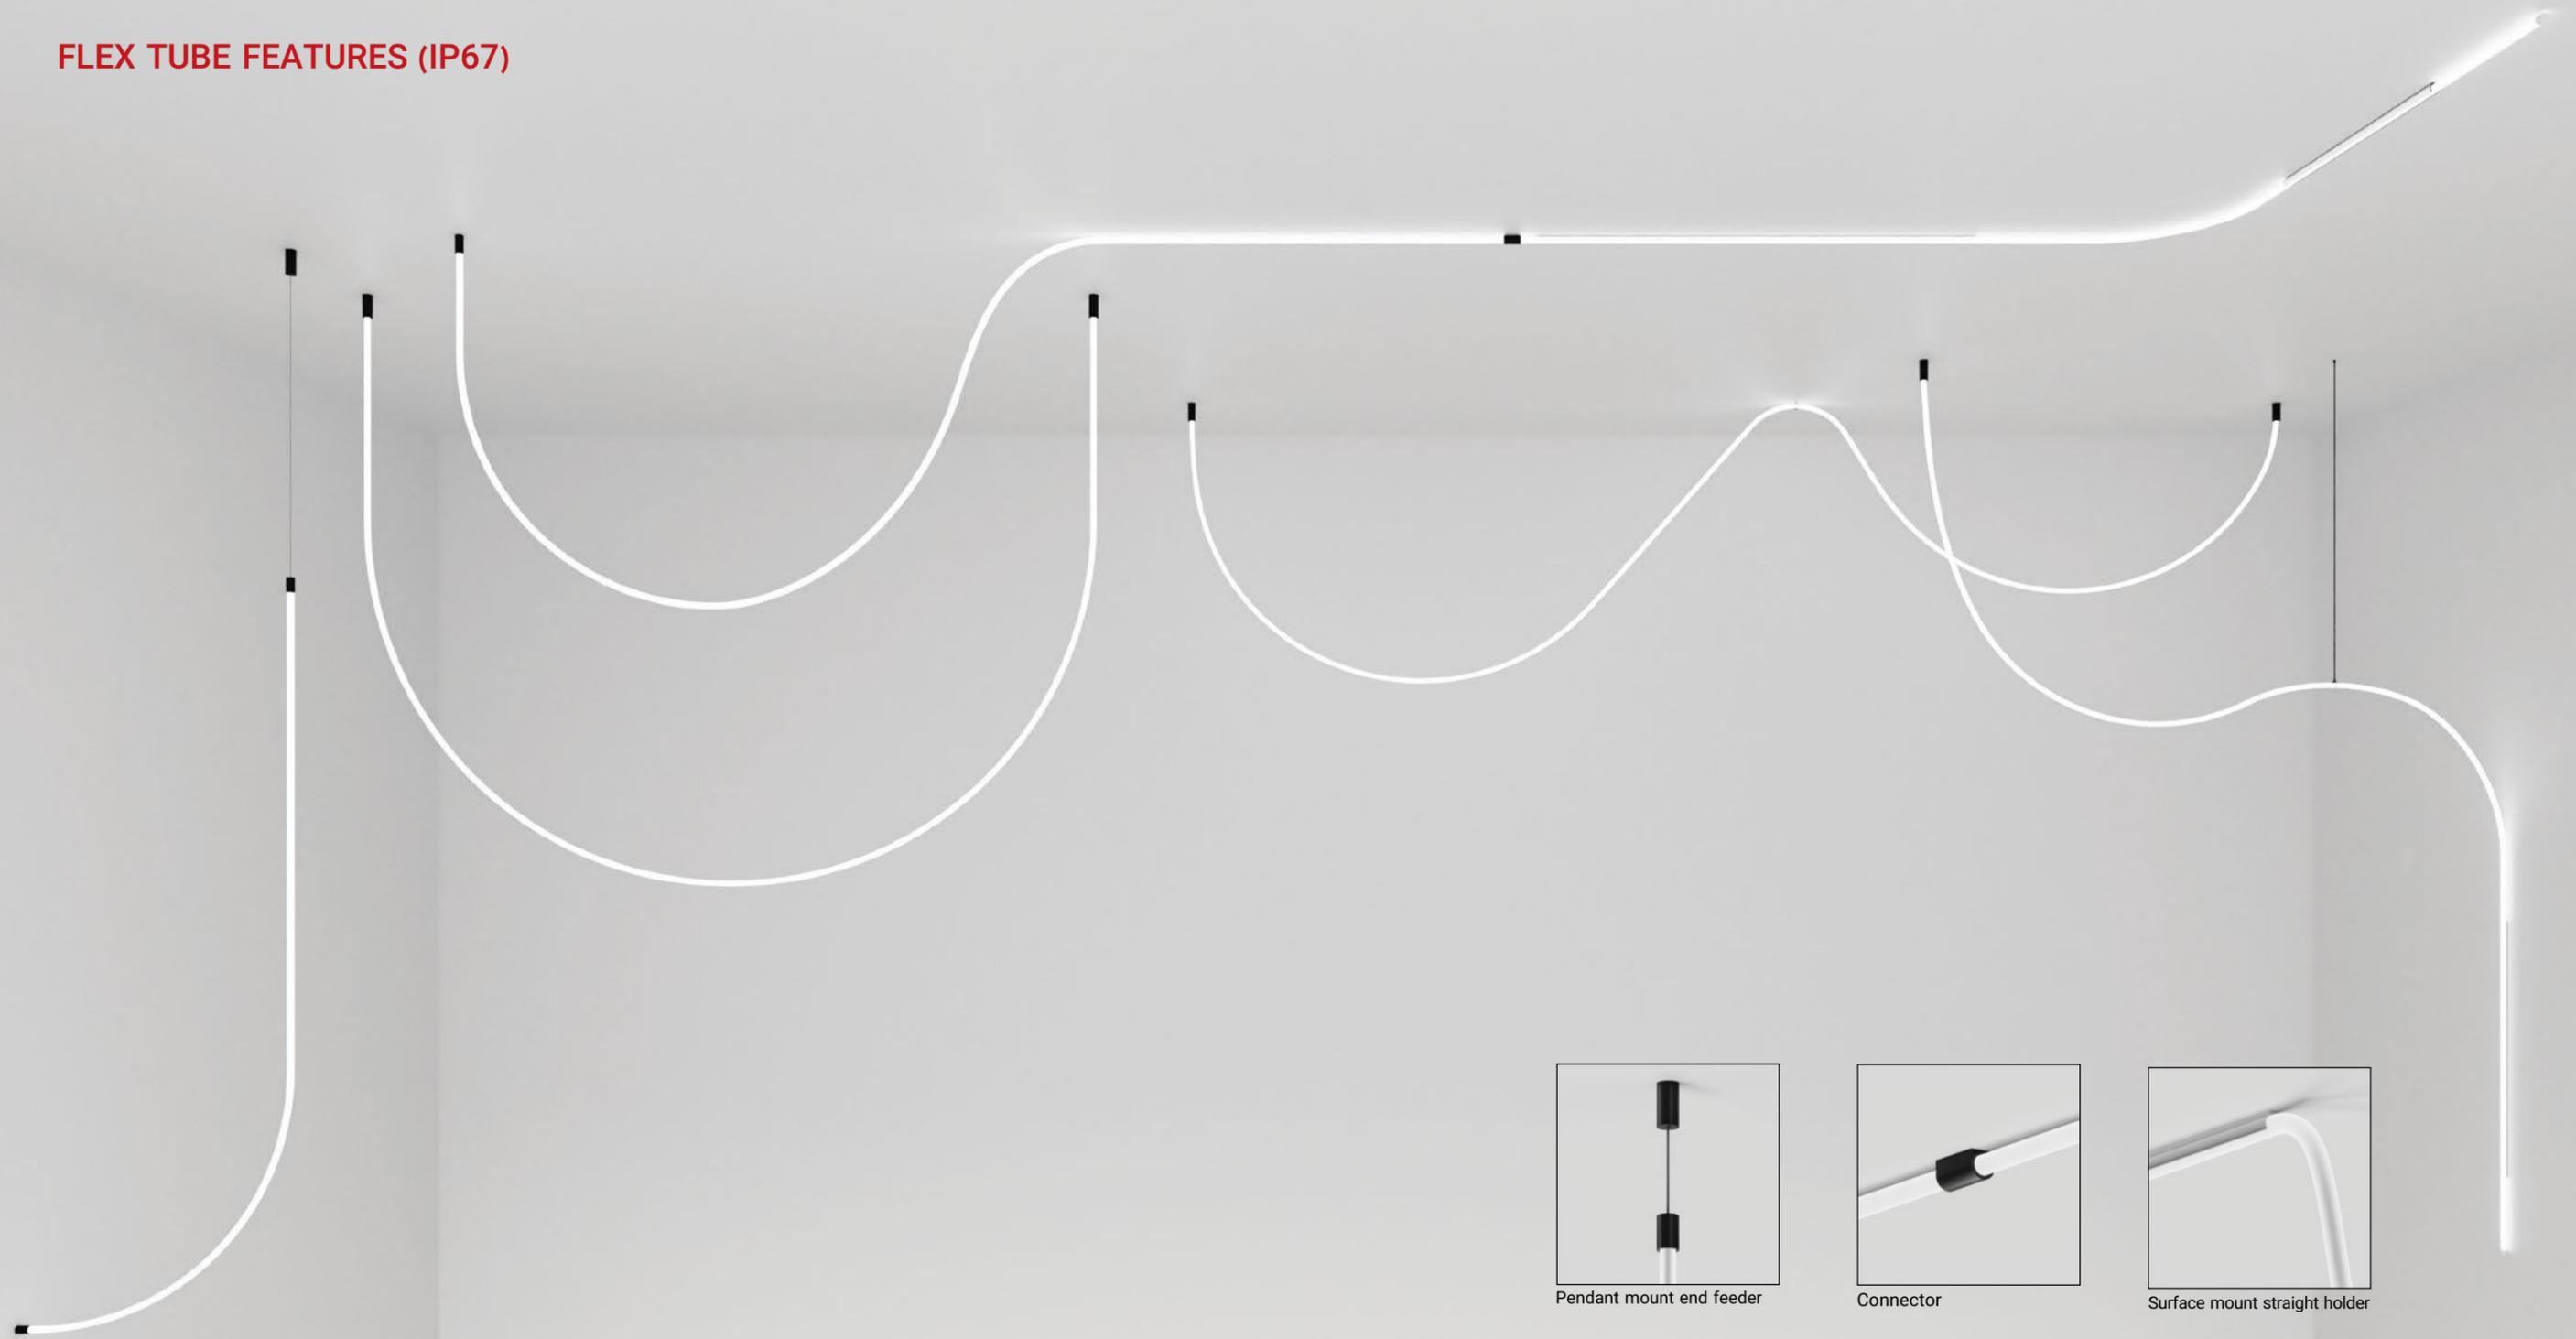

- Borderless Design
- Water and dust resistant (IP67)
- Creative design and flexibility in shaping light
- Experience endless diversity aligned with architectural vision
- Flexible installation, allowing installation on ceilings and walls
- Easy installation without the need for a specialist
- Ability to create harmonious and diverse designs



Pendant mount end feeder

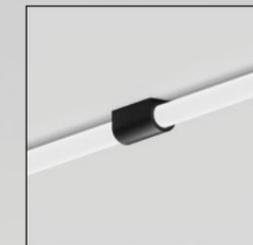


Connector




Surface mount straight holder




Surface mount end feeder/holder

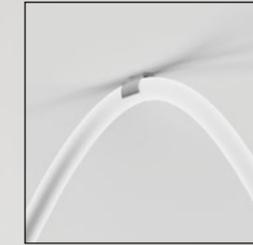


Pendant mount hidden holder

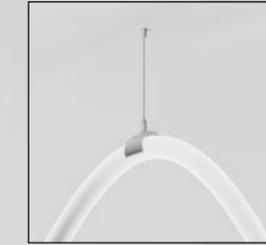

Surface mount hidden holder



END/Side feeding on request




10cm cutting intervals by order



Minimum bending diameter of 20cm



5w/m , 10w/m power on request



IP 67



Flexible



TW 2700 - 5000 K



FLEX TUBE SYSTEM

Section View

Ø25mm  2500/5000/custom [NF 25 SC](#)

Technical Details

| Reference | Power (w/m) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|---------------|-------------|-----------------|--------------------|----------------|
| NF 25 SC (H1) | 5 (10) | 56.8 (52.9) | 284 (529) | Ø25xL |
| NF 25 2500 SC | 25 | 56 | 1322 | Ø25x2500 |
| NF 25 5000 SC | 50 | 56 | 2645 | Ø25x5000 |

 **installation**
more information



 **Watch Video**

ICON C (IP65)



 **NIC C 23 PC**
Ø230 x 72 mm | 12 w | 1080 lm

 **NIC C 23 PCW**
Ø230 x 72 mm | 12 w | 1080 lm



Motion Sensor

 installation
more information
3D object



ICON S (IP65)



 **NIC S 2121 PC**
210 x 210 x 72 mm | 12 w | 1092 lm

 **NIC S 2121 PLW**
210 x 210 x 72 mm | 12 w | 1092 lm



Motion Sensor

 installation
more information
3D object



ICON S Wall (IP65)



NIC S 2121 PCW
210x210x72 mm | 12 w | 1092 lm




Motion Sensor



ICON

Section View

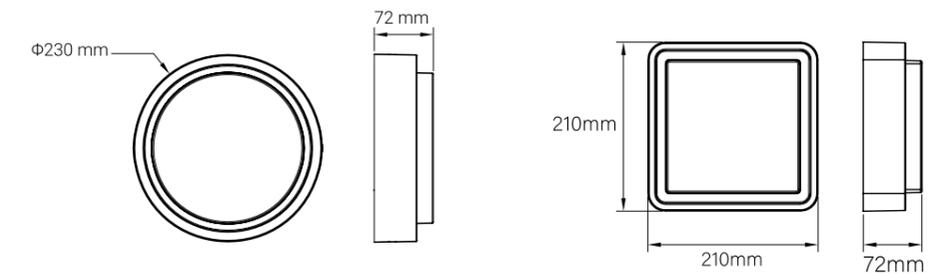

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|----------------|-----------|-----------------|--------------------|----------------|
| NIC C 23 PC | 12 | 90 | 1080 | Φ230 x 72 |
| NIC C 23 PCW | 12 | 90 | 1080 | Φ230 x 72 |
| NIC S 2121 PC | 12 | 91 | 1092 | 210 x 210 x 72 |
| NIC S 2121 PLW | 12 | 91 | 1092 | 210 x 210 x 72 |
| NIC S 2121 PCW | 12 | 91 | 1092 | 210 x 210 x 72 |

RINGO



-  **NRI 60 PMP**
Ø600 mm | 59 w | 5910 lm
-  **NRI 90 PMP**
Ø900 mm | 86 w | 7680 lm
-  **NRI 120 PMP**
Ø1200 mm | 128 w | 11520 lm
-  **Customizable**


 **installation**
more information
3D object



Novin Company 



Section View

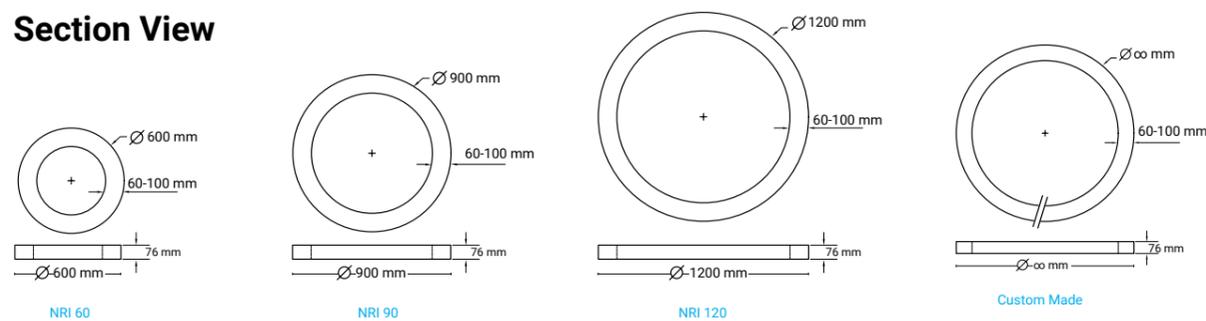

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|----------------|-----------|-----------------|--------------------|--------------------|
| NRI 60 PC/PCP | 59 | 100 | 5910 | $\varnothing 600$ |
| NRI 90 PC/PCP | 86 | 89 | 7680 | $\varnothing 900$ |
| NRI 120 PC/PCP | 128 | 90 | 11520 | $\varnothing 1200$ |

PCP: pendant PC: surface


LINNO



-  **NLI 40 PM/PMI/PMP/PMR**
Ø360 mm | 28 w | 2460 lm | [cut: Ø360mm](#)
-  **NLI 60 PM/PMI/PMP/PMR**
Ø575 mm | 45 w | 4632 lm | [cut: Ø580mm](#)
-  **NLI 90 PM/PMI/PMP/PMR**
Ø855 mm | 90 w | 9600 lm | [cut: Ø860mm](#)
-  **NLI 120 PM/PMI/PMP/PMR**
Ø1135 mm | 158 w | 16800 lm | [cut: Ø1140mm](#)



installation
more information
3D object

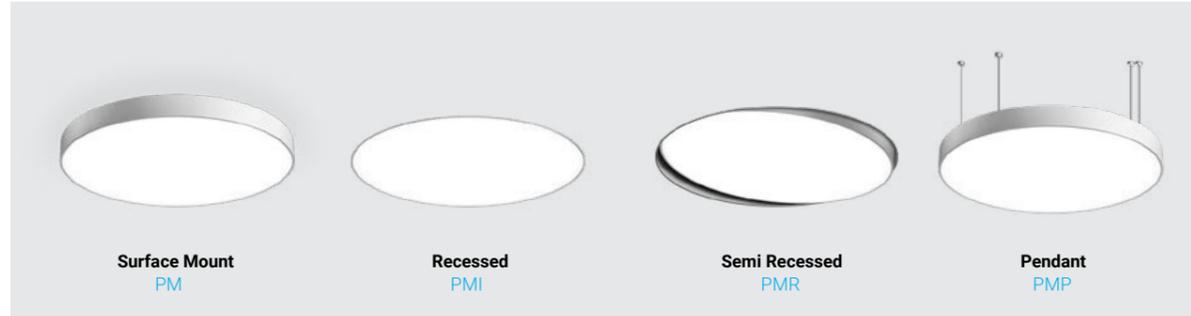

Sahara Software Group




Rasa Medical Center



LINNO

Section View

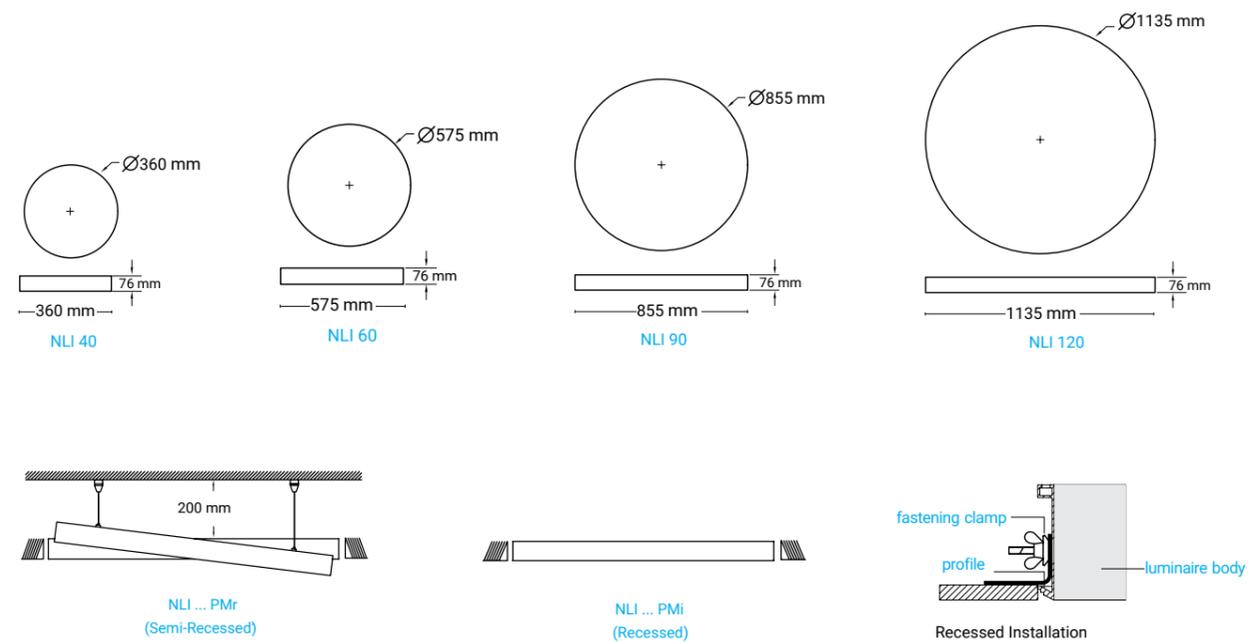

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Diameter (mm) |
|---------------------------|-----------|-----------------|--------------------|---------------|
| NLI 40 PM/ PMP/ PMI/ PMR | 28 | 87.86 | 2460 | Ø 360 |
| NLI 60 PM/ PMP/ PMI/ PMR | 45 | 102.93 | 4632 | Ø 575 |
| NLI 90 PM/ PMP/ PMI/ PMR | 90 | 106.67 | 9600 | Ø 855 |
| NLI 120 PM/ PMP/ PMI/ PMR | 158 | 106.33 | 16800 | Ø 1135 |

PM: Surface Mount PMP: Pendant PMI: Recessed PMR: Semi Recessed



Watch Video
installation




Royan Building

RELAX




RELAX

Section View

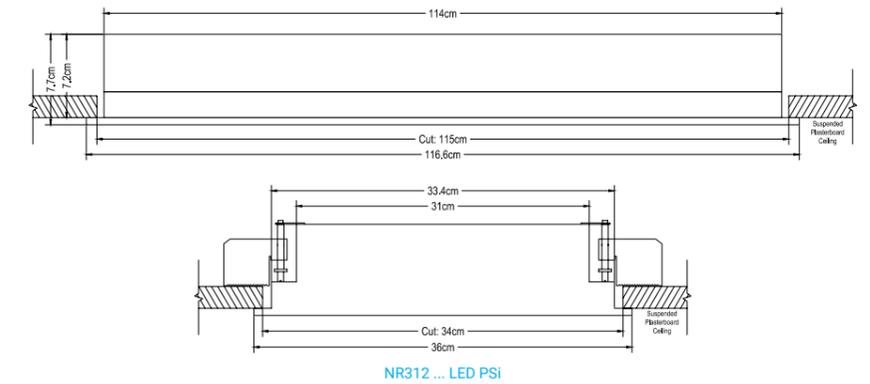

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|---------------|-----------|-----------------|--------------------|----------------|
| NR 66 62 Psi | 62 | 105 | 6532 | Custom |
| NR 66 42 Psi | 42.5 | 102 | 4368 | Custom |
| NR 36 32 Psi | 32 | 102 | 3266 | Custom |
| NR 36 22 Psi | 22 | 99 | 2184 | Custom |
| NR 312 62 Psi | 62 | 105 | 6532 | Custom |
| NR 312 42 Psi | 42.5 | 102 | 4368 | Custom |
| NR 33 23 Psi | 23 | 88 | 2028 | Custom |

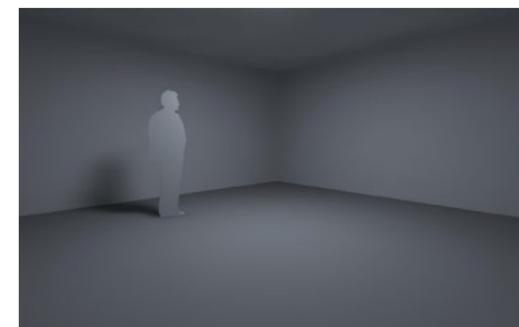

RELAX CLEANROOM (IP67)




NR CR 312 60 Psi
| 60 w | 6060 lm

NR CR 66 60 Psi
| 60 w | 6060 lm




RELAX

Section View

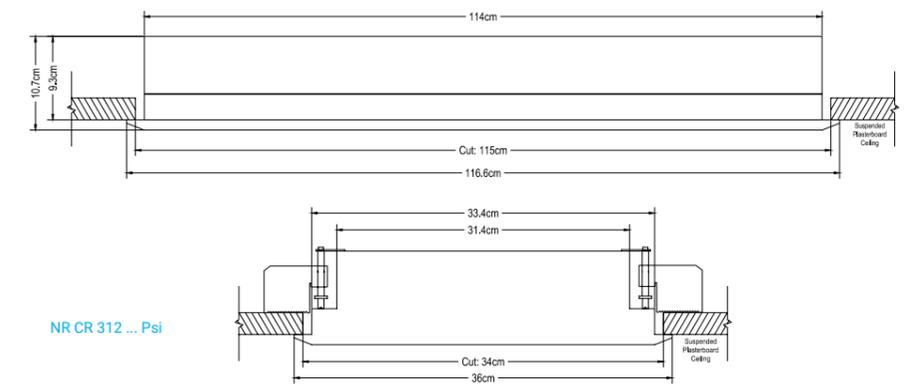

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|----------------------|-----------|-----------------|--------------------|----------------|
| NR CR 312 60 UGR GLI | 60 | 101 | 6060 | Custom |
| NR CR 66 60 UGR GLI | 60 | 101 | 6060 | Custom |

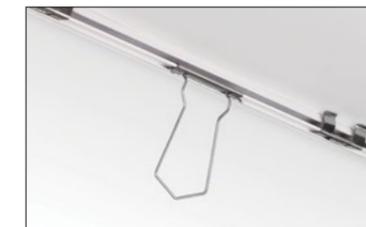

Frame installation spring



Adjustable fastening clamp



IP67 cable gland



Frame sealant gasket




BERMUDA



-  **NBF 69 PM/PMP**
694 mm | 124 w | 15075 lm
-  **NBF 109 PM/PMP**
1090 mm | 220 w | 27090 lm
-  **NBR 81 PM/PMP**
816 mm | 91 w | 10192 lm
-  **NBR 111 PM/PMP**
1118 mm | 126 w | 14265 lm

 **installation**
more information
3D object

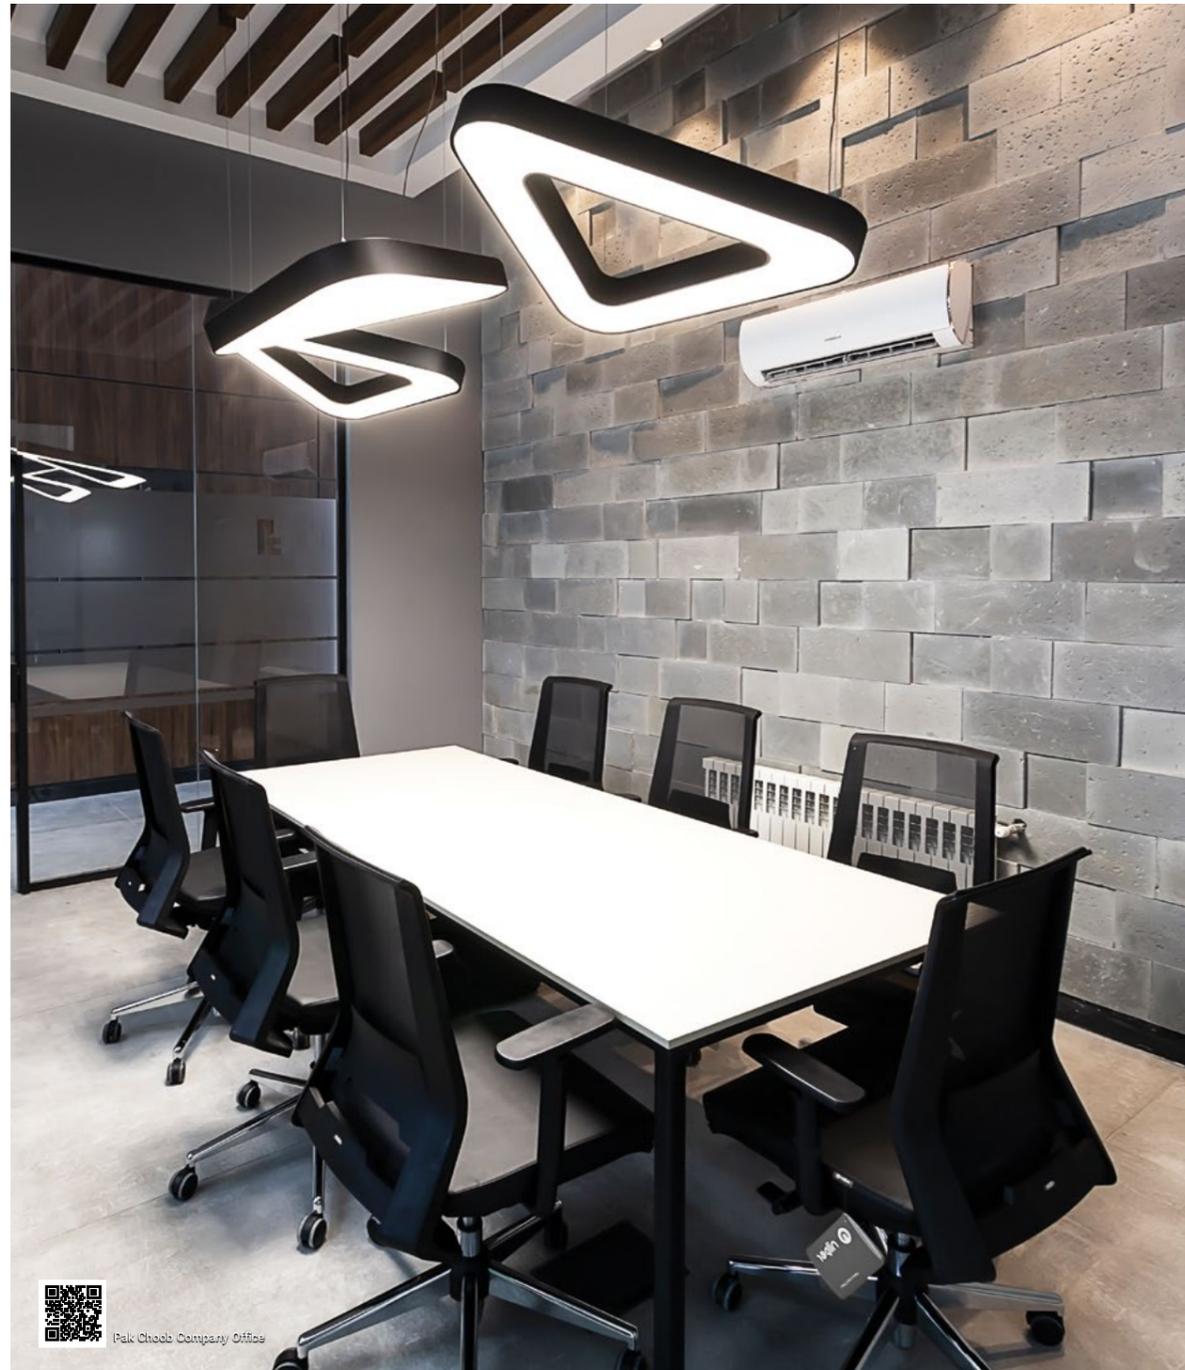

 Pak Choo Company Office


ART LINE




NAL ... PMP
L x W x H mm | up to 79 w/m | up to 7012 lm/m
Customizable




 **installation**
more information
3D object

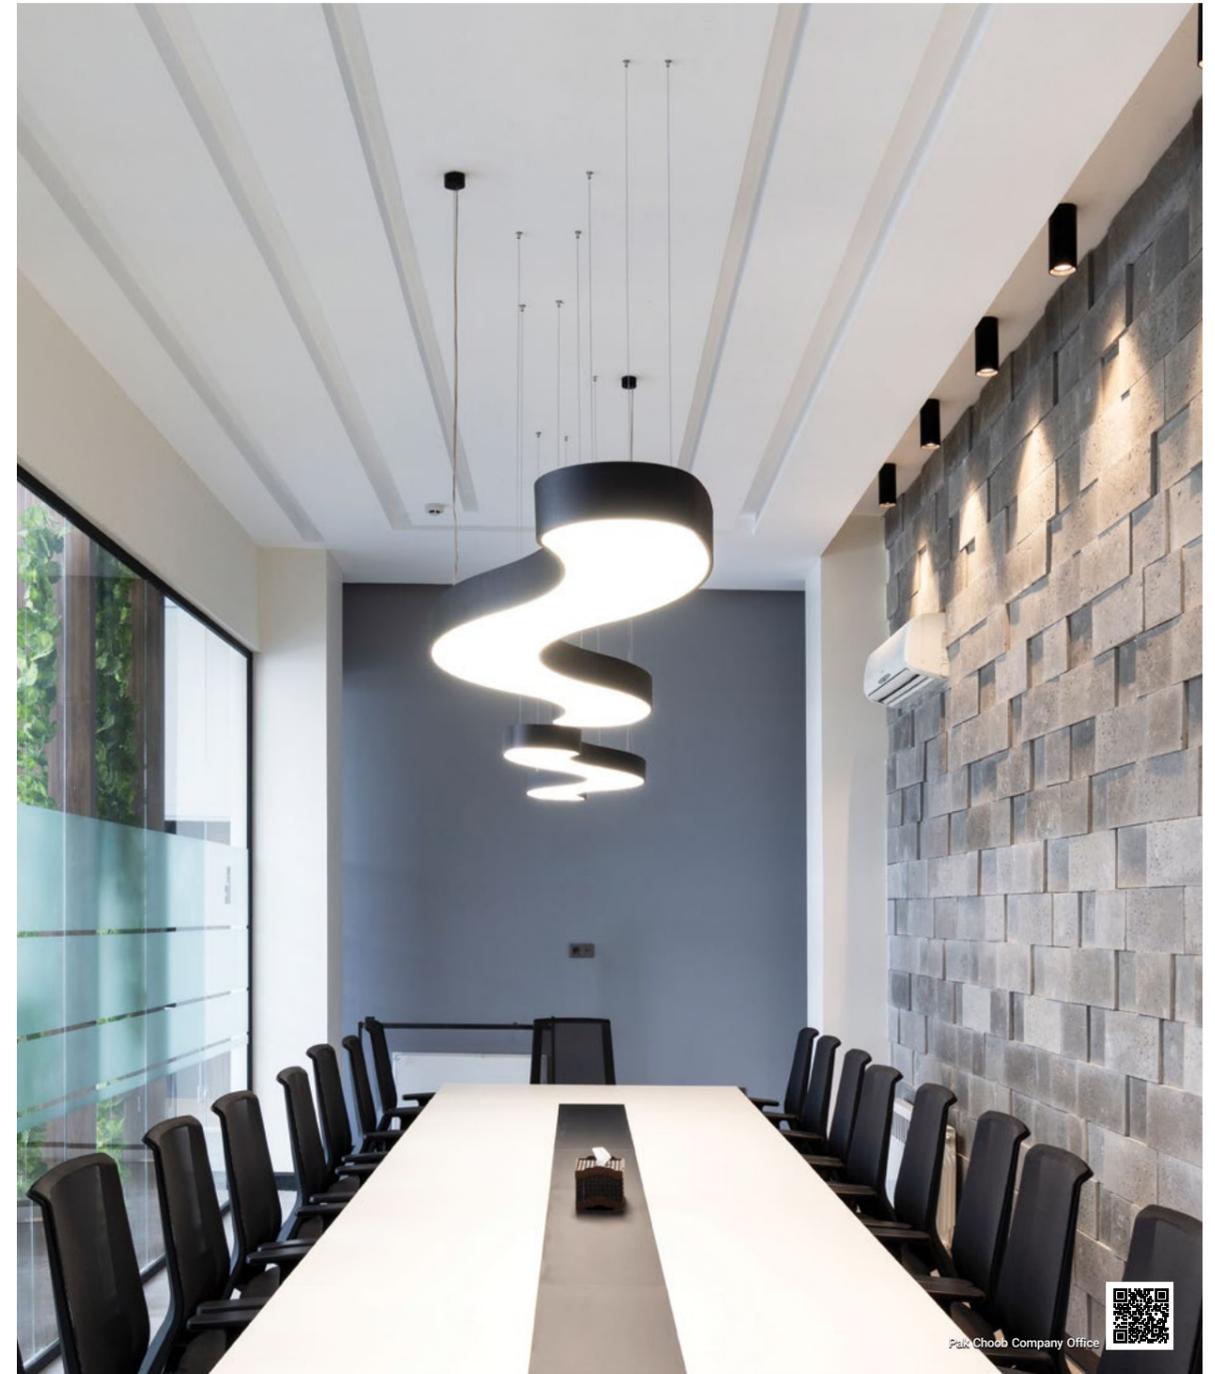

 Pak Choo Company Office

HEXA

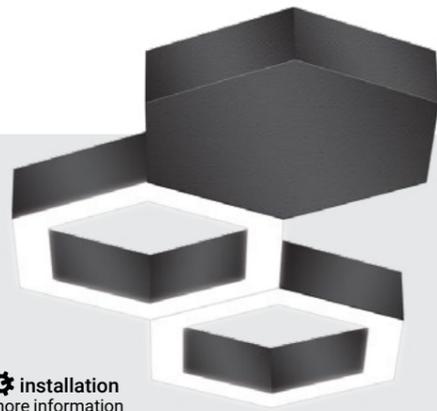

-  **NHG F 101 PM/PMP**
Ø1020 x 76 mm | 124 w | 15075 lm
-  **NHG F 133 PM/PMP**
Ø1335 x 76 mm | 220 w | 27090 lm
Customizable
-  **NHG R 178 PM/PMP**
Ø1786 x 86 mm | 154 w | 16335 lm
-  **NHG R 234 PM/PMP**
Ø2344 x 86 mm | 205 w | 21780 lm
Customizable

 installation
more information
3D object




 Simorgh Company



 Royan Building

ART LINE

Section View

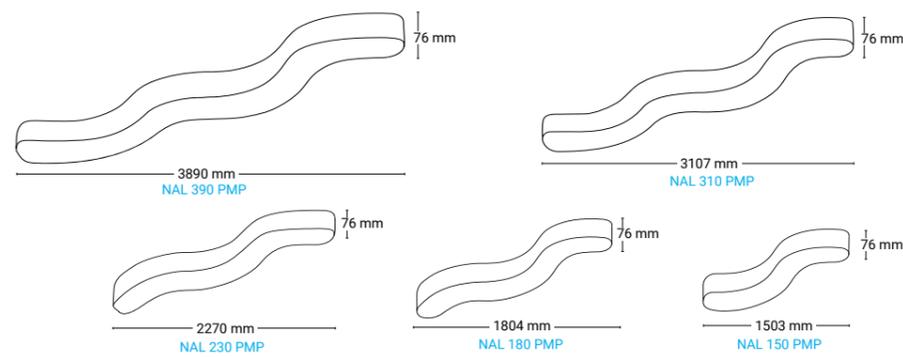


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | length (mm) |
|-------------|-----------|-----------------|--------------------|-------------|
| NAL 390 PMP | 298 | 90.3 | 26913 | 3890 |
| NAL 310 PMP | 236 | 89.6 | 21159 | 3107 |
| NAL 275 PMP | 212 | 89.4 | 18954 | 2750 |
| NAL 230 PMP | 180 | 88.4 | 15918 | 2270 |
| NAL 180 PMP | 138 | 87.5 | 12078 | 1804 |
| NAL 150 PMP | 116 | 87.5 | 10158 | 1503 |

PMP: Pendant

BERMUDA-F

Section View

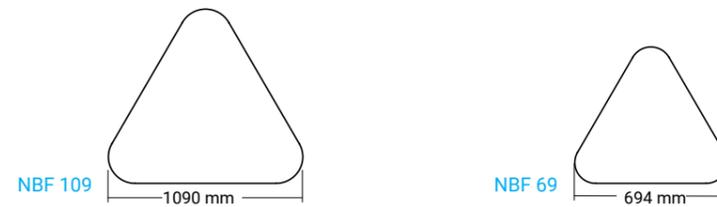

Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|------------------|-----------|-----------------|--------------------|----------------|
| NBF 69 PM / PMP | 124 | 121 | 15075 | 694 x 75 mm H |
| NBF 109 PM / PMP | 220 | 123 | 27090 | 1090 x 75 mm H |

PM: Surface Mount

PMP: Pendant

BERMUDA-R

Section View

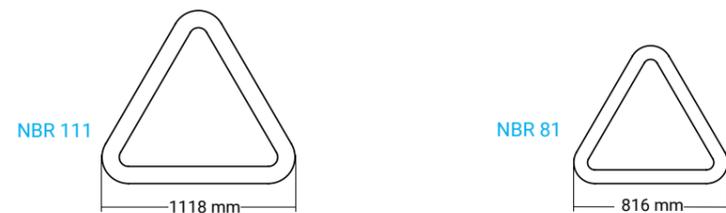

Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|------------------|-----------|-----------------|--------------------|----------------|
| NBR 81 PM / PMP | 91 | 112 | 10192 | 788 x 75 mm H |
| NBR 111 PM / PMP | 126 w | 113 | 14265 | 1090 x 75 mm H |

PM: Surface Mount

PMP: Pendant

HEXA-F

Section View

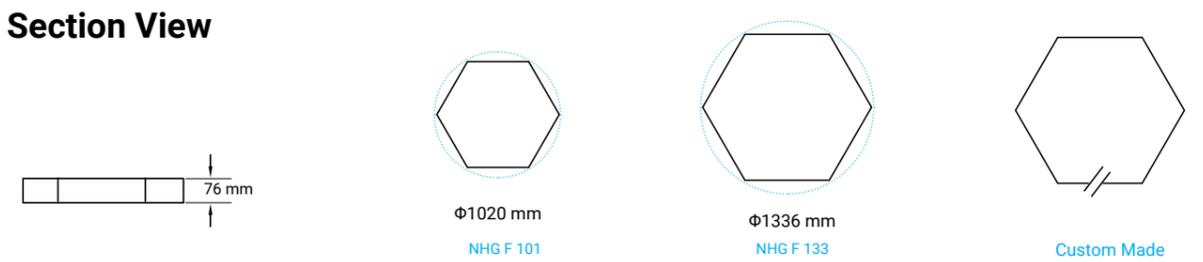

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|--------------------|-----------|-----------------|--------------------|----------------|
| NHG F 101 PM / PMP | 124 | 121 | 15075 | 1020 x 76 |
| NHG F 133 PM / PMP | 220 | 123 | 27090 | 1336 x 76 |

PM: Surface Mount


PMP: Pendant

Sample arrangement for a 10x10x2.8m space RF (0.7,0.5,0.2) and MF 0.8

| illuminance target level | 124 lx | 350 lx | 570 lx | 793 lx |
|--------------------------|--------|--------|--------|--------|
| NHG F 101 | 1 | 3 | 5 | 7 |
| illuminance target level | 222 lx | 427 lx | 627 lx | 818 lx |
| NHG F 133 | 1 | 2 | 3 | 4 |

HEXA-R

Section View

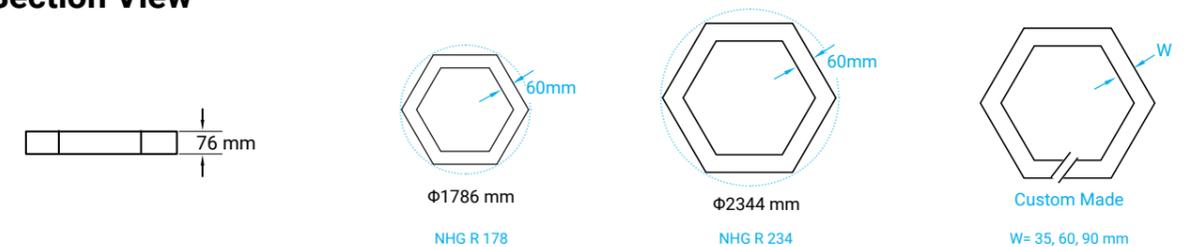

Technical Details



| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|------------------|-----------|-----------------|--------------------|----------------|
| NHG R 178 PM/PMP | 154 | 106.7 | 16335 | 1786 x 76 H |
| NHG R 234 PM/PMP | 205 | 106.2 | 21780 | 2344 x 76 H |

PM: Surface Mount

PMP: Pendant


Sample arrangement for a 10x10x2.8m space RF (0.7,0.5,0.2) and MF 0.8

| illuminance target level | 124 lx | 350 lx | 570 lx | 793 lx |
|--------------------------|--------|--------|--------|--------|
| NHG R 178 | 3 | 8 | 14 | 20 |
| illuminance target level | 100 lx | 300 lx | 500 lx | 750 lx |
| NHG R 234 | 1 | 3 | 5 | 8 |

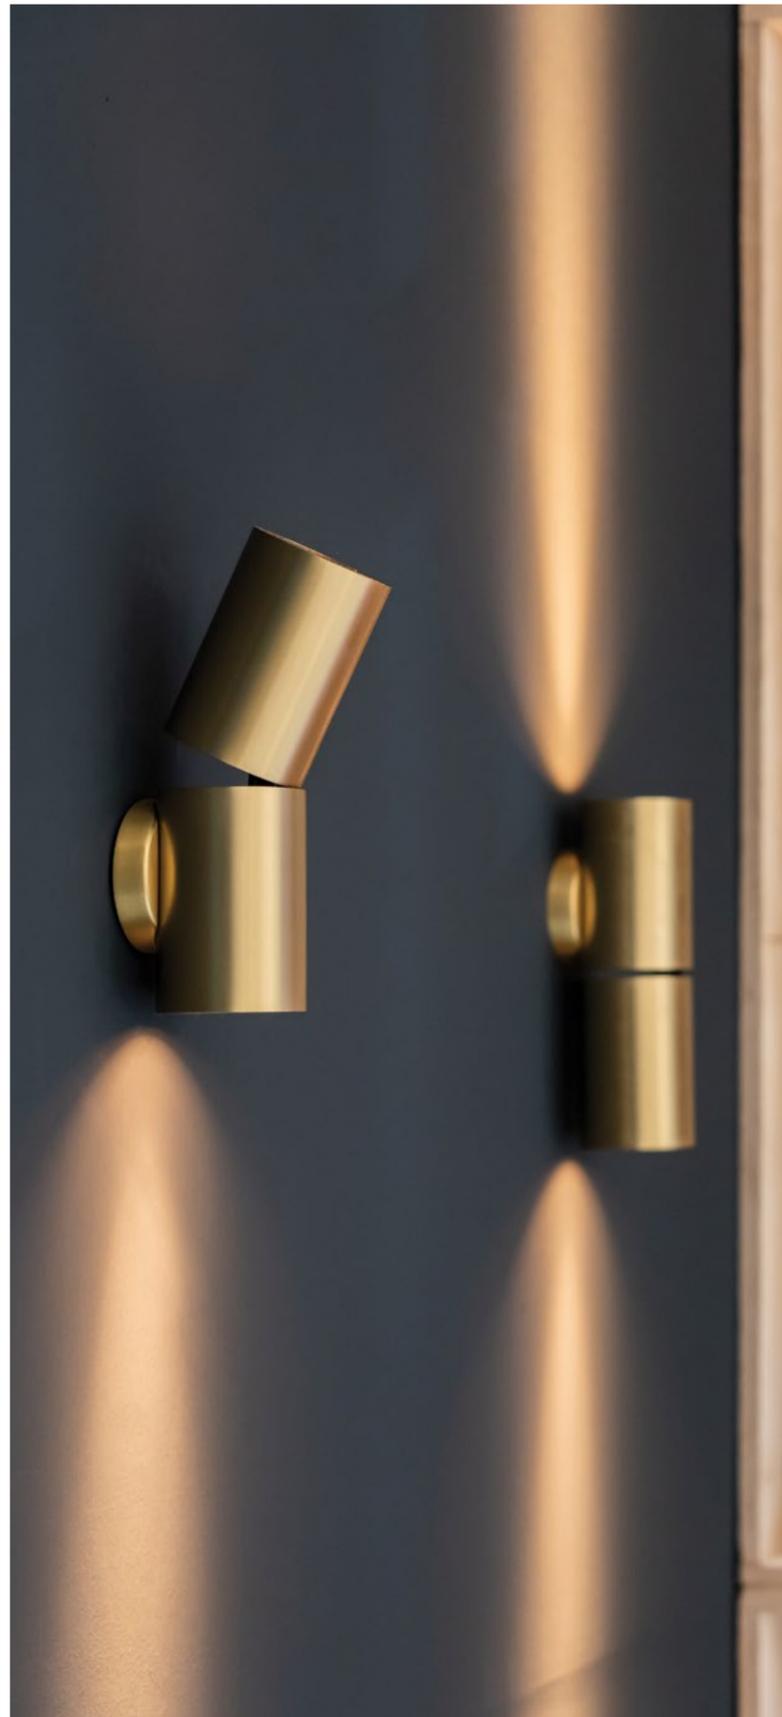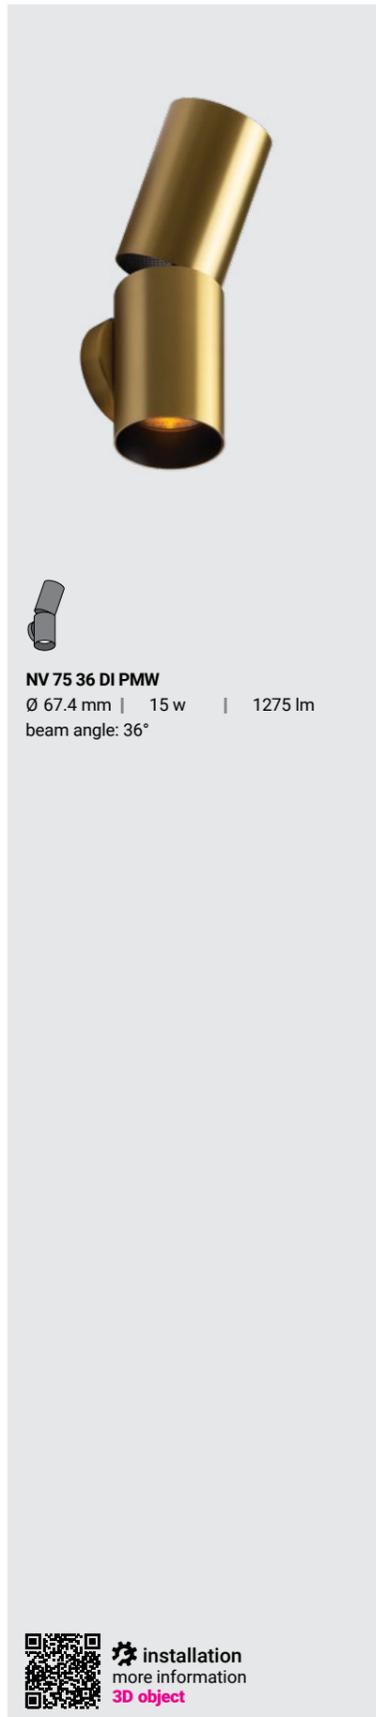

VIVA

Section View

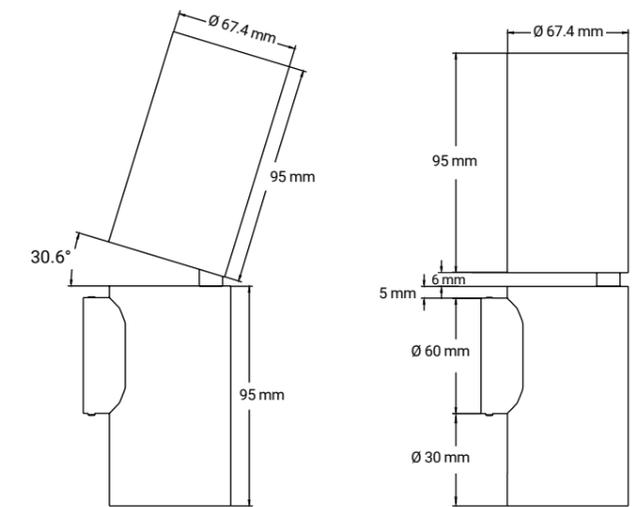

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Diameter (mm) |
|-----------------|-----------|-----------------|--------------------|------|---------------|
| NV 50 36 DI PMW | 10 | 84.8 | 848 | 36° | Ø 67.4 |
| NV 75 36 DI PMW | 15 | 84.8 | 1275 | 36° | Ø 67.4 |

DREAM



NDR C 78 PM/PMI
Ø78 x 27 mm | 3 w | 296 lm
40° beam angle




NDR R 4080 PM/PMI
80 x 40 mm | 3 w | 296 lm
40° beam angle



WINK



NW E 82 PMI
80 x 56 mm | 3 w | 296 lm
beam angle: 40°

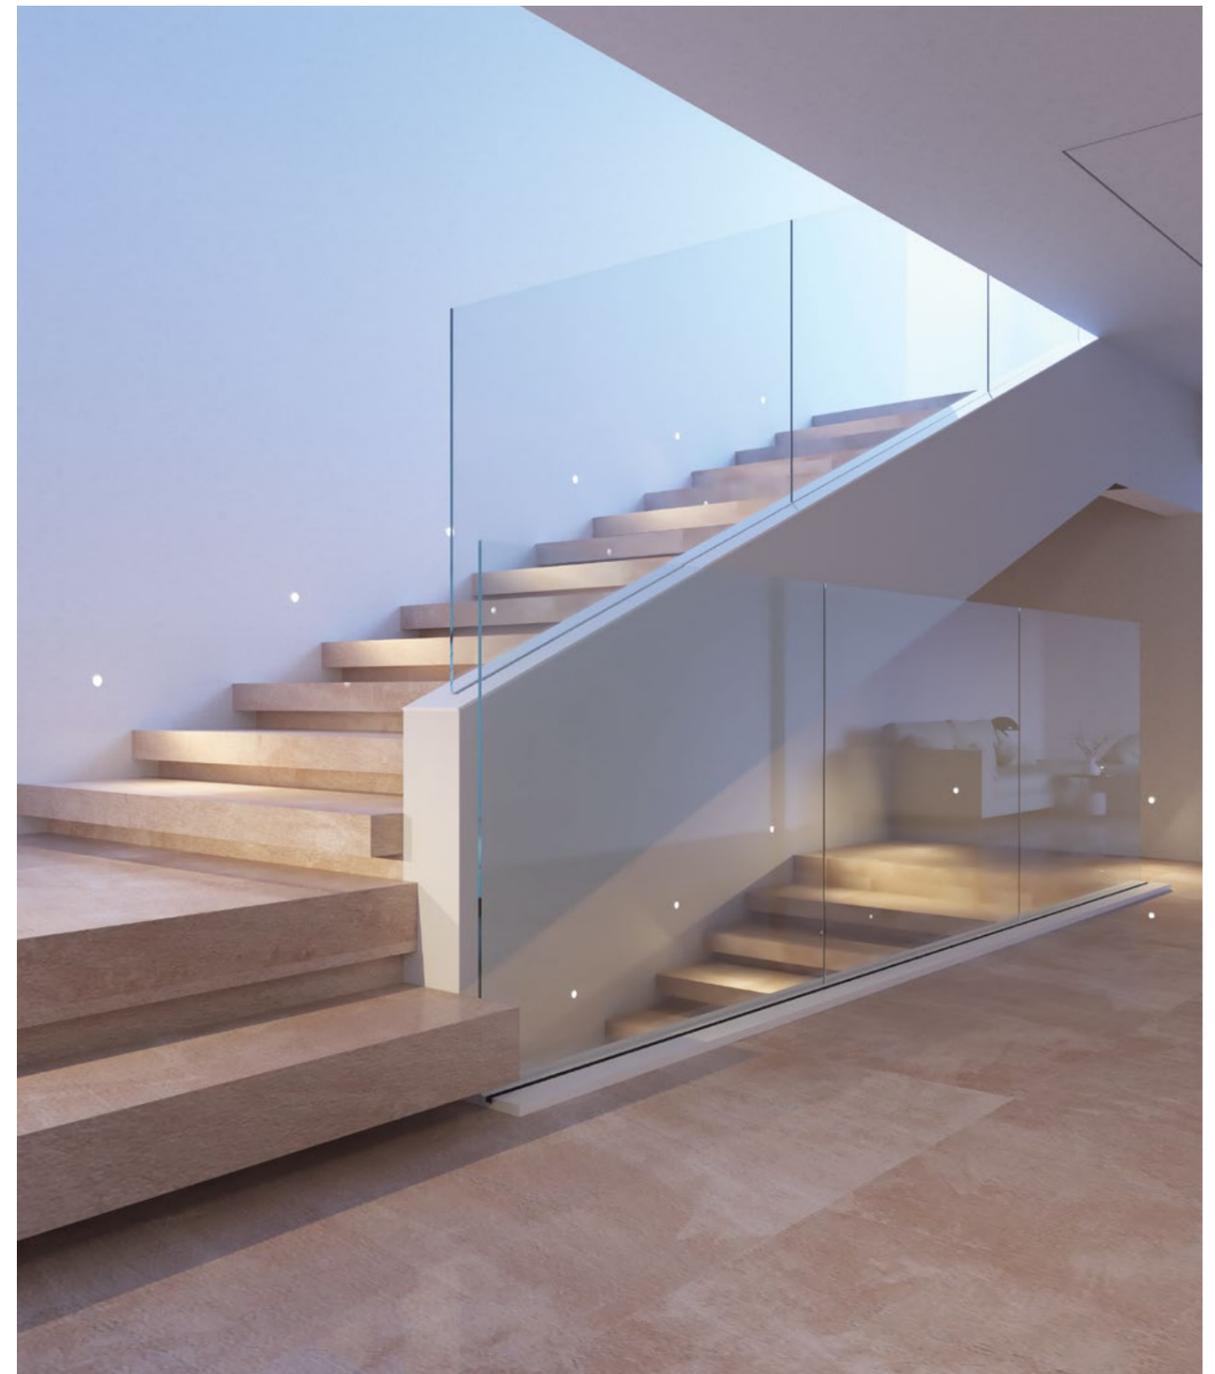

WALLIE



NWA L PC
L x 38 x 80 mm | up to 23.3 w/m | up to 2228 lm/m



 installation
more information
3D object



PRIMA



 installation
more information
3D object

 **NPR 1001 PC**
L x 16 x 85 mm | 5 w/m | 360 lm/m

 **NPR 1001 PCI**
L x 16 x 85 mm | 5 w/m | 360 lm/m

 **NPR 1001 PCR**
L x 16 x 85 mm | 5 w/m | 360 lm/m



BLINK IP65

NBL SIN 30 30 PMB/PMS
 Ø48.4 x 90 mm | 5.5 w | 519 lm

NBL DOU 30 30 PMB/PMS
 2 x Ø48.4 x 90 mm | 11 w | 1038 lm

NBL TRI 30 30 PMB/PMS
 2 x Ø48.4 x 90 mm | 16.5 w | 1557 lm




installation
 more information
 3D object



BLINK

Section View

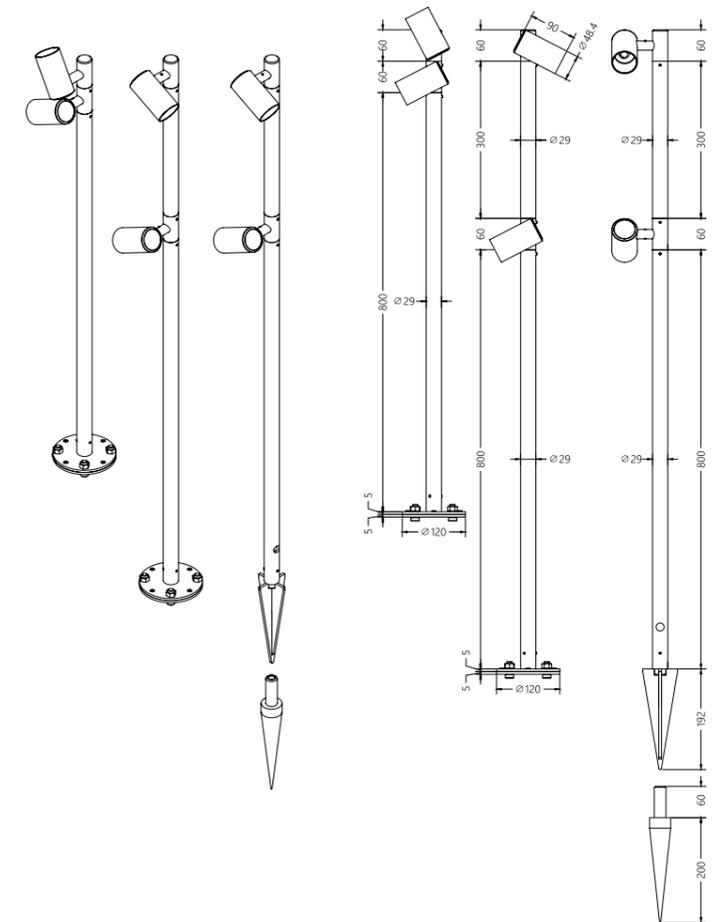

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|-----------------------|-----------|-----------------|--------------------|---------|------------------|
| NBL SIN 30 30 PMB/PMS | 5.5 | 94 | 519 | 30° SYM | Ø48.4 x 90 mm |
| NBL DOU 30 30 PMB/PMS | 11 | 94 | 1038 | 30° SYM | 2x Ø48.4 x 90 mm |
| NBL TRI 30 30 PMB/PMS | 16.5 | 94 | 1557 | 30° SYM | 3x Ø48.4 x 90 mm |

NOVA IP65



NNOV 40 PMi


Ø38 x 43 mm | 3.5 w | 270 lm
15°, 38°, 60° beam angle
cut: Ø40 x 70mm



Steel made gland



installation
more information
3D object

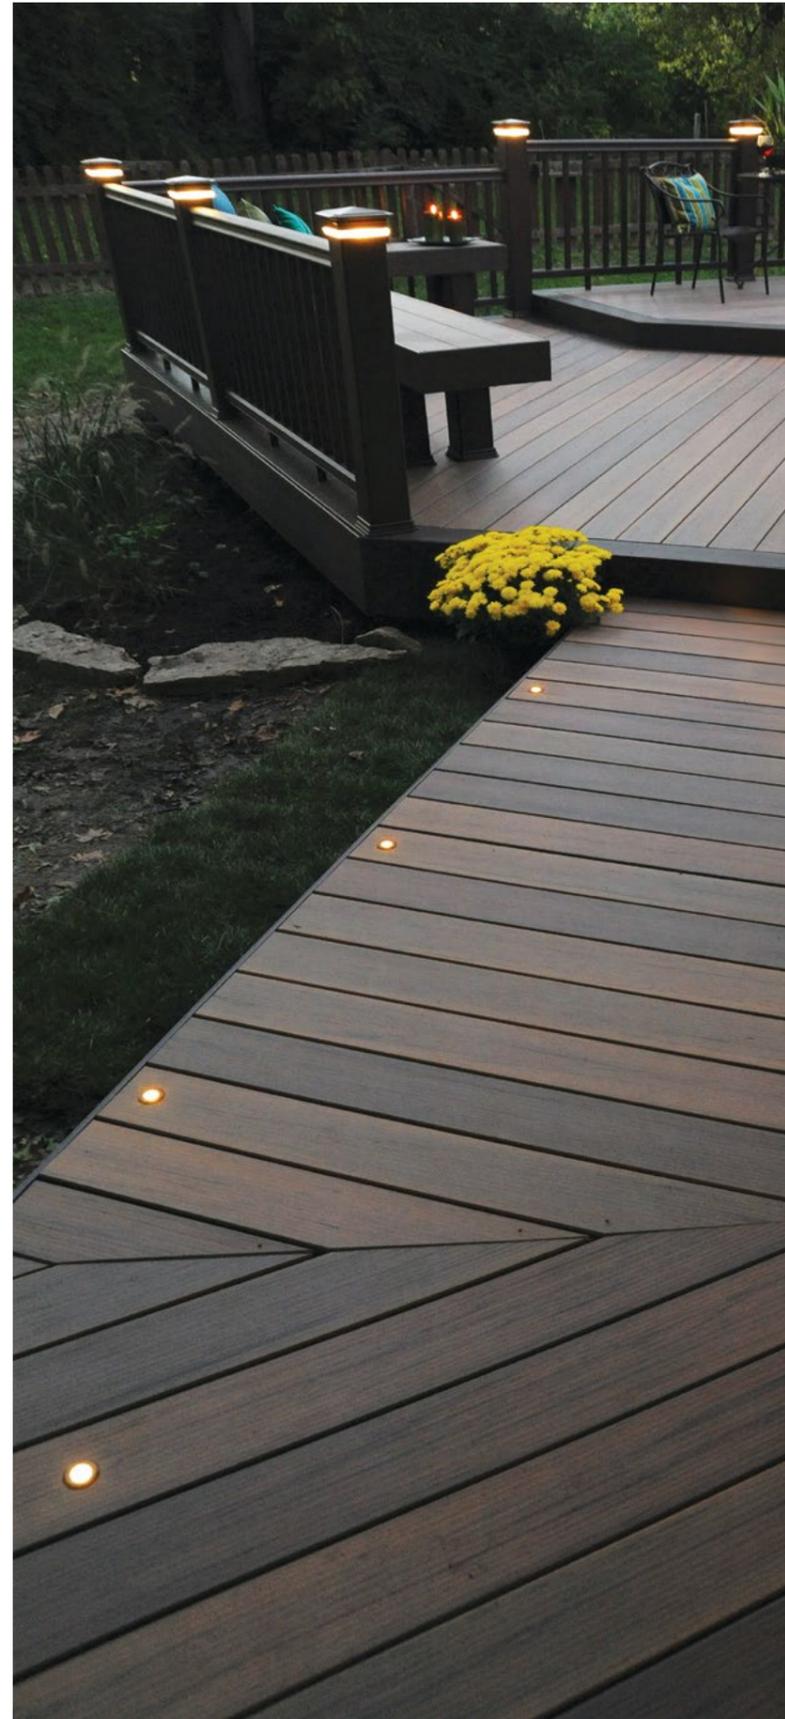

GUARD IP65



NG 2518 GL

244 x 187 mm | up to 20w |
up to 1940 lm



LED COB Module



Die cast protective housing




installation
more information
3D object



PRIMA

Section View

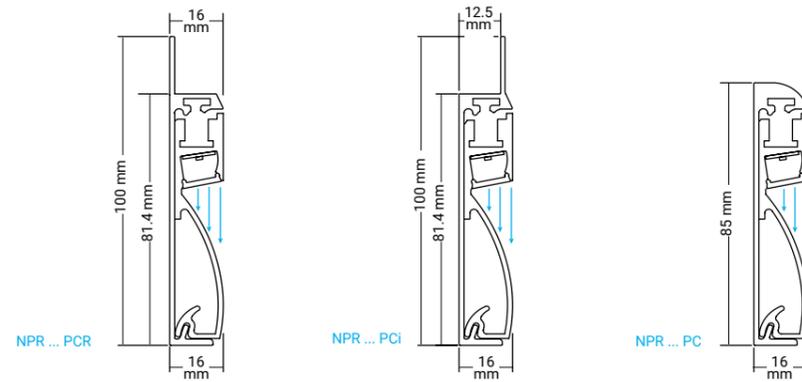


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|---------------|-----------|-----------------|--------------------|-------------|
| NPR 1001 PC | 5 | 72 | 360 | 1000 mm |
| NPR 1001 PC Δ | 5 | 72 | 360 | 1000 mm |
| NPR 1001 PC Δ | 5 | 72 | 360 | 1000 mm |

Δ: Replace (r) to order recessed and (i) to order semi-recessed light.

WINK

Section View

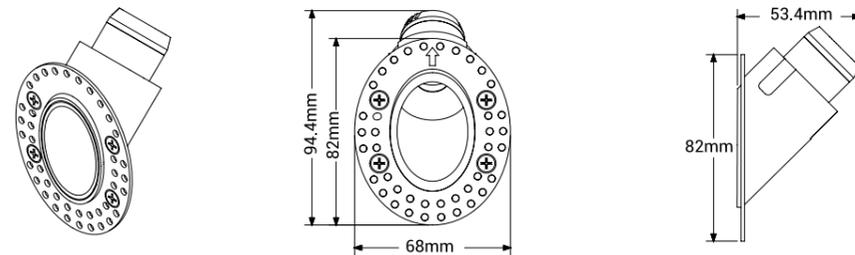


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Diameter (mm) |
|-------------|-----------|-----------------|--------------------|---------|---------------|
| NW E 82 PMI | 3 | 98.67 | 296 | 40° SYM | Ø 90 |

WALLIE

Section View



Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Length (mm) |
|------------|-----------|-----------------|--------------------|-------------|
| NWA 60 PC | 14 | 95.5 | 1337 | 600 mm |
| NWA 90 PC | 20 | 100.1 | 2002 | 900 mm |
| NWA 120 PC | 26 | 102.8 | 2674 | 1200 mm |

PC: Surface Mount

PCP: Pendant

NOVA

Section View

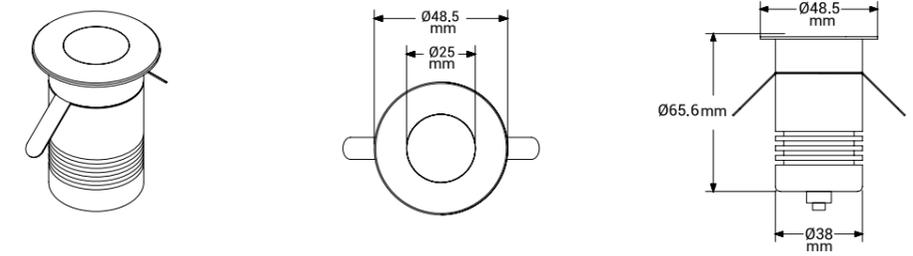


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|----------------|-----------|-----------------|--------------------|---------|----------------|
| NNOV 40 15 PMI | 3.5 | 77.14 | 270 | 15° SYM | Ø 38 x 43 mm |
| NNOV 40 38 PMI | 3.5 | 77.14 | 270 | 38° SYM | Ø 38 x 43 mm |
| NNOV 40 60 PMI | 3.5 | 77.14 | 270 | 60° SYM | Ø 38 x 43 mm |

DREAM

Section View

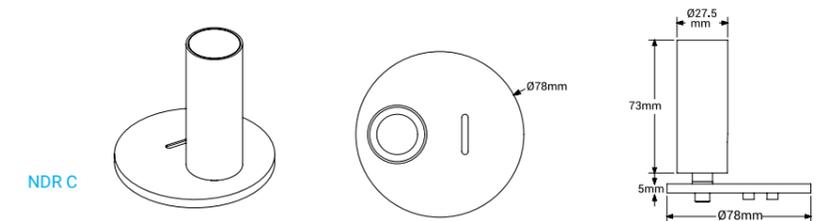

Technical Details


| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|----------------|-----------|-----------------|--------------------|---------|----------------|
| NDR C 78 PM | 3 w | 98.67 | 296 | 40° SYM | Ø78x27 |
| NDR C 78 PMI | 3 w | 98.67 | 296 | 40° SYM | Ø78x51 |
| NDR R 4080 PM | 3 w | 98.67 | 296 | 40° SYM | 120x40x27 |
| NDR R 4080 PMI | 3 w | 98.67 | 296 | 40° SYM | 80x60x40 |

PC: Surface Mount

PCP: Pendant

GUARD

Section View

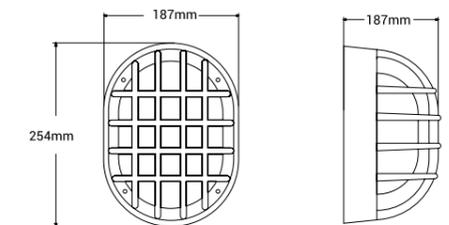

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Dimension (mm) |
|--------------------|-----------|-----------------|--------------------|----------------|
| NG 2518 GL (H1) | 10 - 20 | 97 | 970 - 1940 | 254 x 187 |
| NG 2518 OP GL (H1) | 10 - 20 | 74 | 738 - 1480 | 254 x 187 |

MODULAR BRIGHT IP65



- 
NMB 2133 PM / PMP
 215 x 330 x 297 mm | 101 w | 12400 lm
- 
NMB 3333 PM / PMP
 330 x 330 x 297 mm | 149 w | 18600 lm
- 
NMB 3344 PM / PMP
 430 x 330 x 297 mm | 208 w | 25000 lm

 **Customizable**

 **installation**
 more information
 **3D object**





RAINED IP66



-  Diecast end caps
-  Steel made grip


 **NR L PC/PCP**
 L x 84 x 74 mm
 up to 58 w/m
 up to 6591 lm/m

 **installation**
 more information
 **3D object**

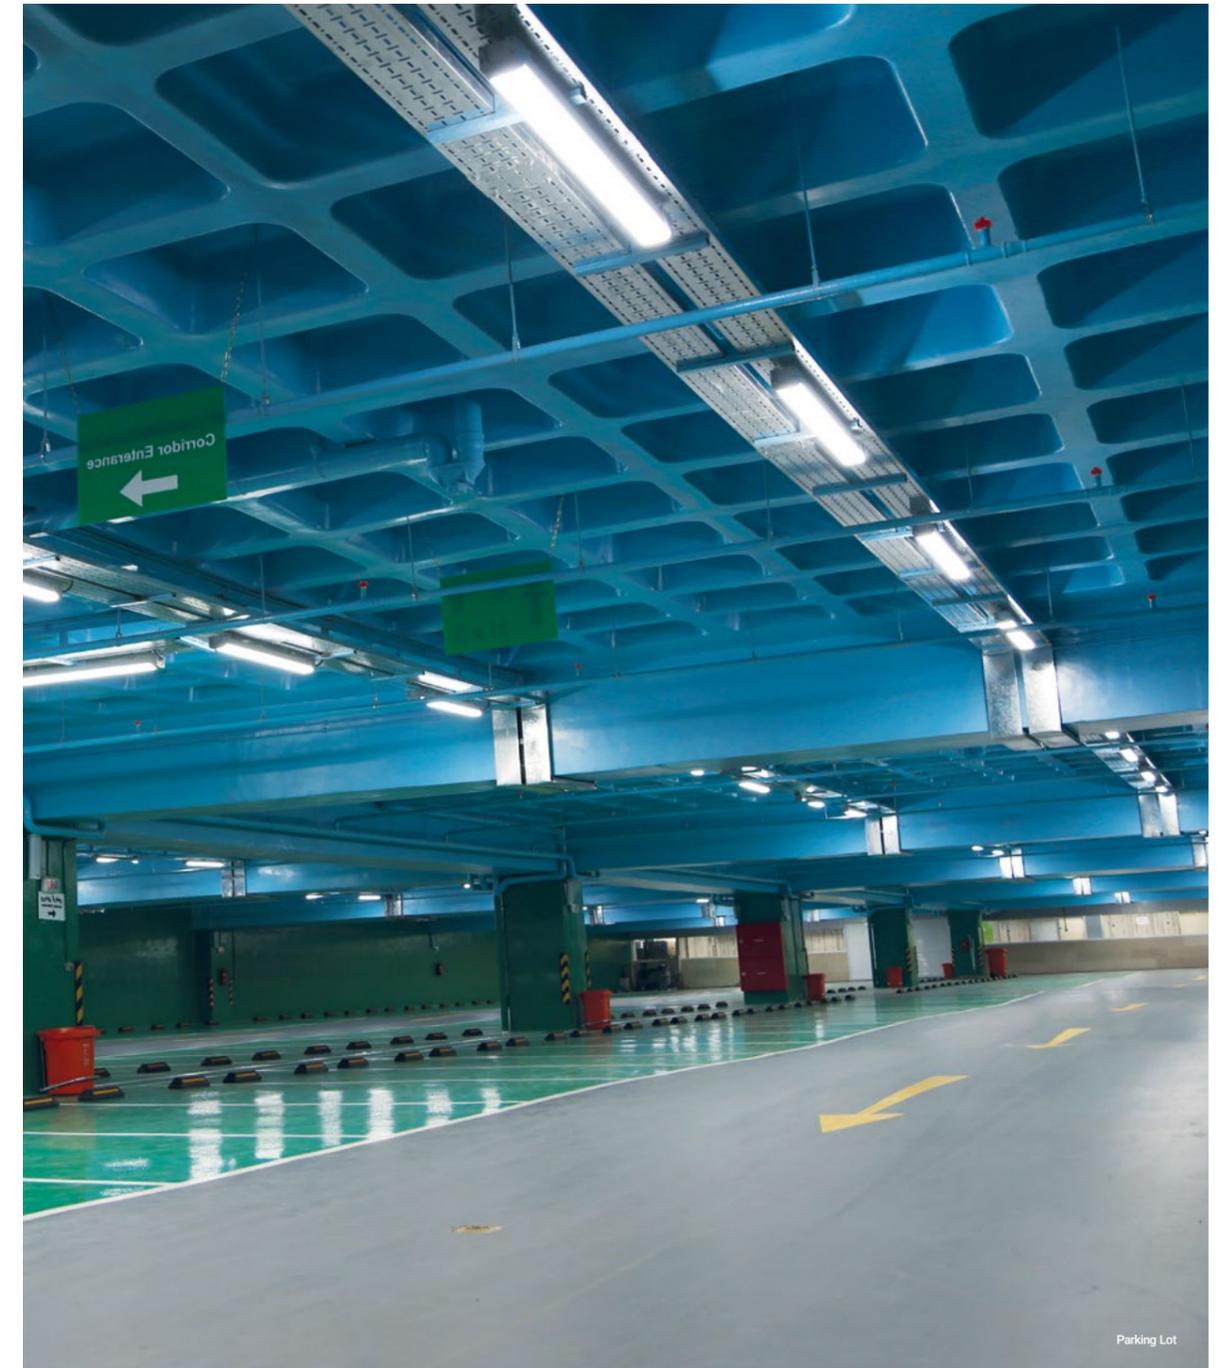MODULAR BRIGHT

Section View

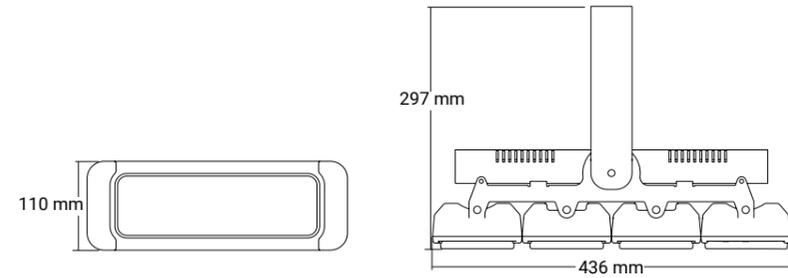


Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | FWHM | Dimension (mm) |
|--------------------|-----------|-----------------|--------------------|---------|-----------------|
| NMB 2133 10 PM/PMP | 101 | 122.7 | 12400 | 10° SYM | 215 x 330 x 297 |
| NMB 2133 20 PM/PMP | 101 | 122.7 | 12400 | 20° SYM | 215 x 330 x 297 |
| NMB 2133 50 PM/PMP | 101 | 122.7 | 12400 | 50° SYM | 215 x 330 x 297 |
| NMB 3333 10 PM/PMP | 149 | 124.8 | 18600 | 10° SYM | 330 x 330 x 297 |
| NMB 3333 20 PM/PMP | 149 | 124.8 | 18600 | 20° SYM | 330 x 330 x 297 |
| NMB 3333 50 PM/PMP | 149 | 124.8 | 18600 | 50° SYM | 330 x 330 x 297 |
| NMB 3344 10 PM/PMP | 208 | 120.19 | 25000 | 10° SYM | 430 x 330 x 297 |
| NMB 3344 20 PM/PMP | 208 | 120.19 | 25000 | 20° SYM | 430 x 330 x 297 |
| NMB 3344 50 PM/PMP | 208 | 120.19 | 25000 | 50° SYM | 430 x 330 x 297 |

RAINLED

Section View

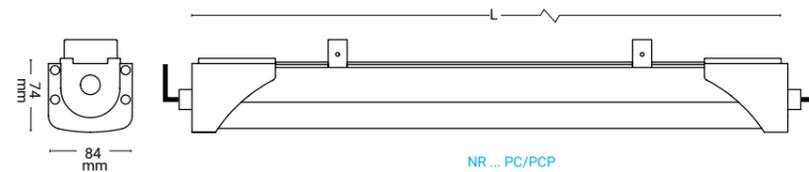

Technical Details

| Reference | Power (w) | Efficacy (lm/w) | Luminous flux (lm) | Lenght (mm) |
|--------------------|-----------|-----------------|--------------------|-------------|
| NR 60 PC/PCP (H1) | 25 - 34 | 109 | 2758 - 3735 | 600 |
| NR 120 PC/PCP (H1) | 48 - 67 | 111 | 5516 - 7470 | 1200 |
| NR 170 PC/PCP(H1) | 71 - 99 | 113 | 8274 - 11205 | 1700 |
| NR 230 PC/PCP (H1) | 94 - 131 | 114 | 11032 - 14940 | 2300 |

H1: High Power

PC: Surface Mount

PCP: Pendant

NEXO LIGHTING

nexolighting.com
(+971) 522 56 71 07



Instagram: [nexo.lighting](https://www.instagram.com/nexo.lighting)
Email: info@nexolighting.com



Download the digital version of the catalog