


TRIMO

Trimless Downlight


 Installation structure

Due to its installation design, Trimo is supplied in a dual-lid package.

1- Ring installation

Open lid No. 1 and install the mounting ring





2- Body installation

After installing the ring and completing the ceiling finishing (putty and paint), open lid No. 2, remove the main body, and install the luminaire



Box contents


- A-Mounting ring
- B-luminaire body
- C-terminal block
- D-driver

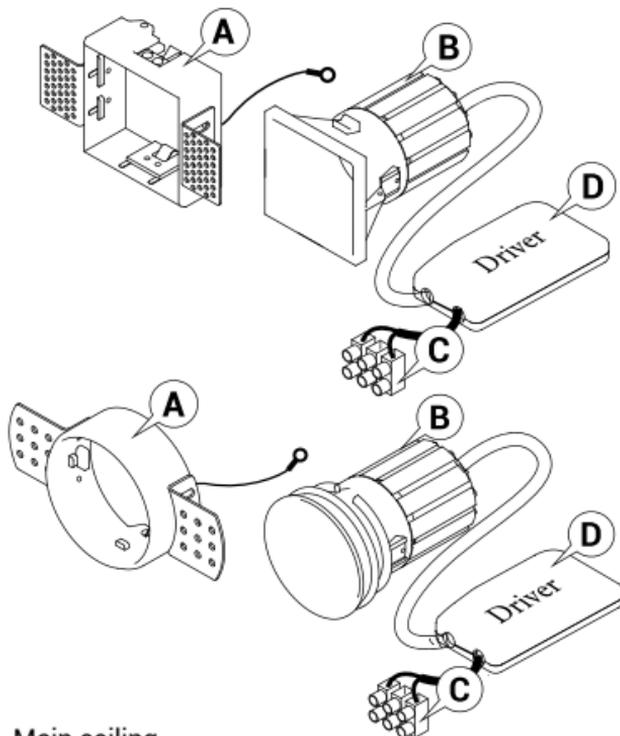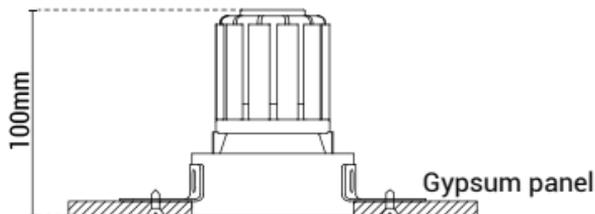
 Main ceiling
 


Cutting the ring
opening in the ceiling


1


ϕ 80 mm

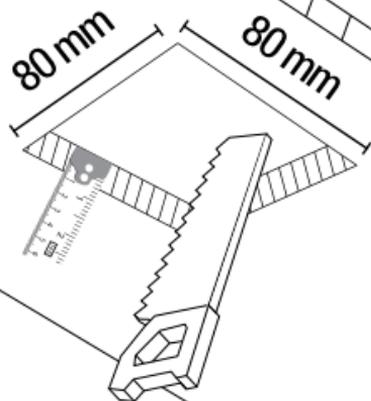

Adjusting the ring tabs
according to the Kanaf
thickness


2

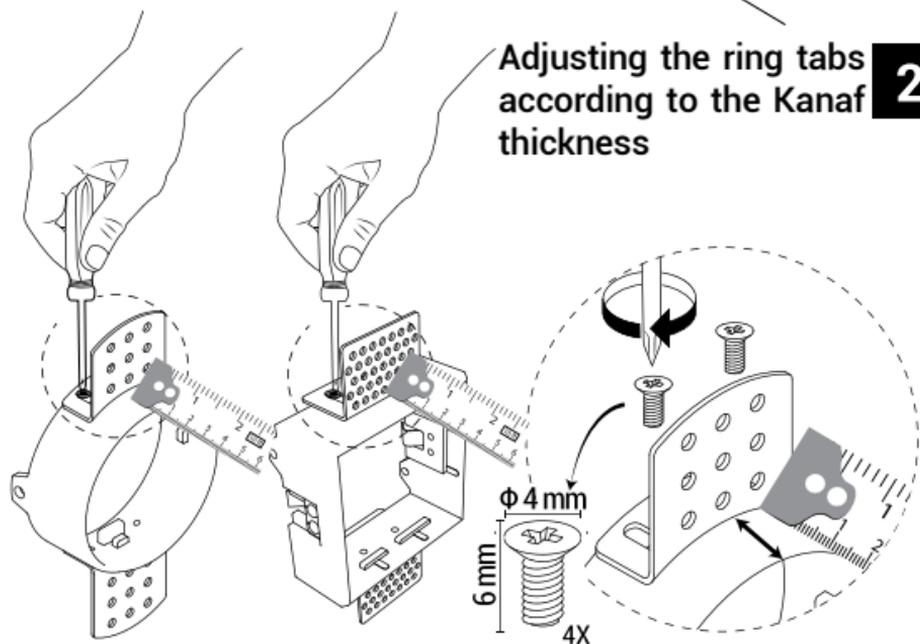

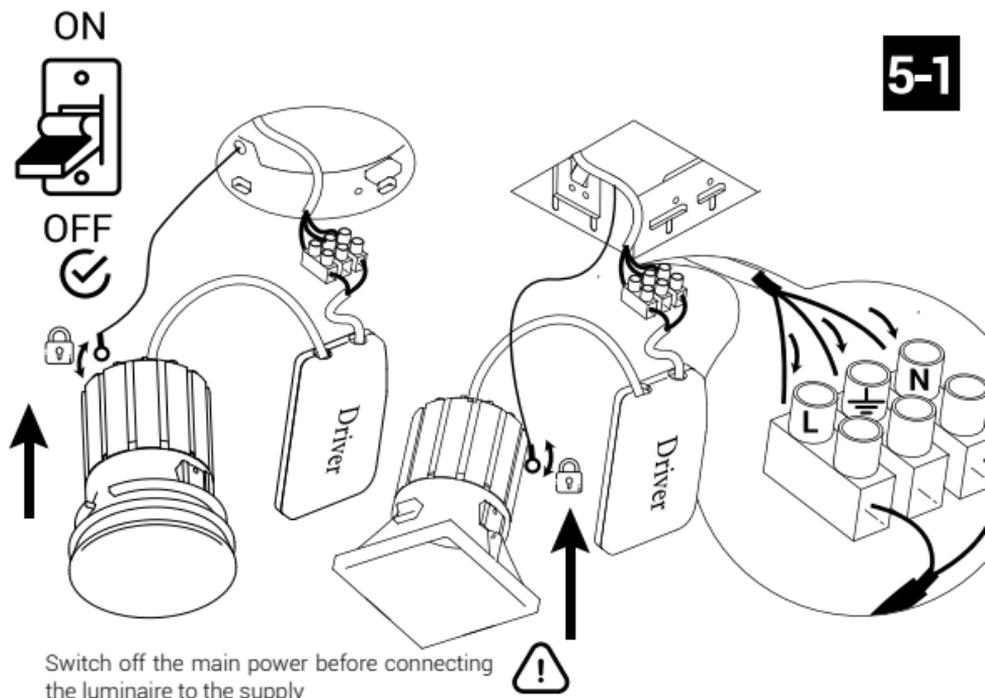


Switch off the main power before connecting the luminaire to the supply


Connecting the luminaire to the DALI smart system 5-2

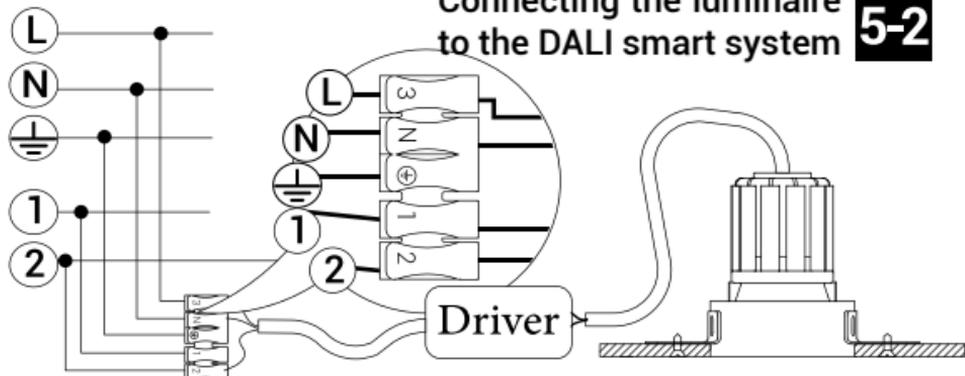

Connecting the dimmable luminaire via push button **5-3**

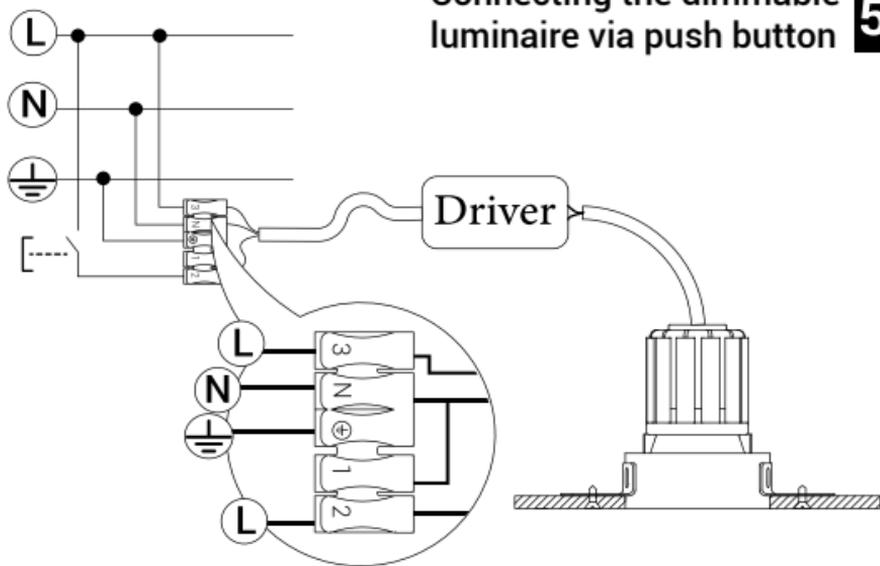


Aligning the main body groove with the ring tabs **6**




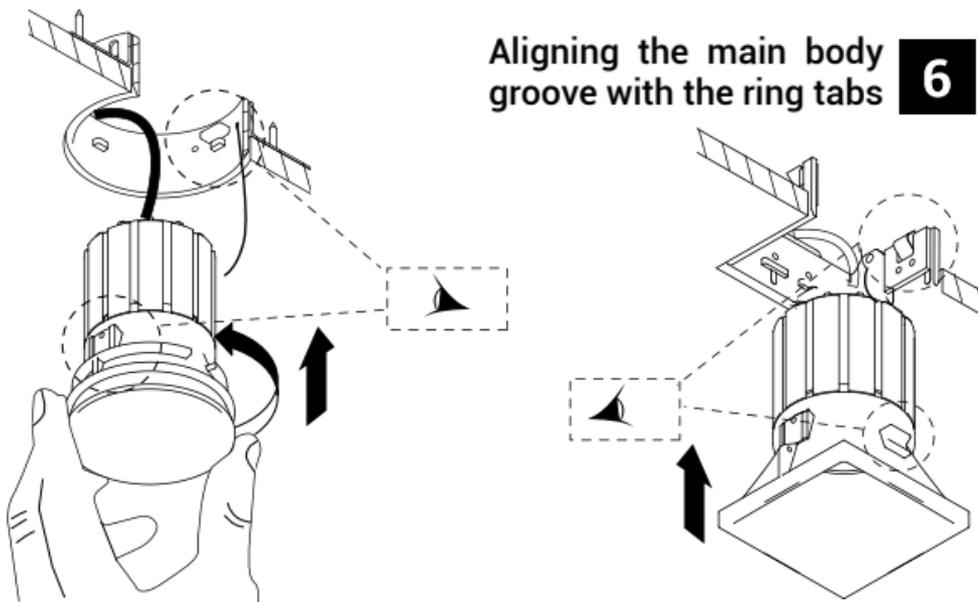




With a simple twist

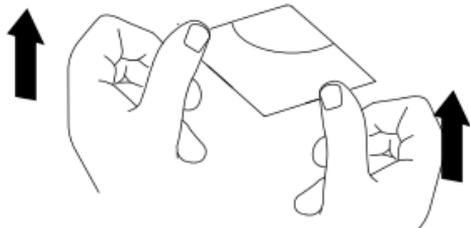

With a click

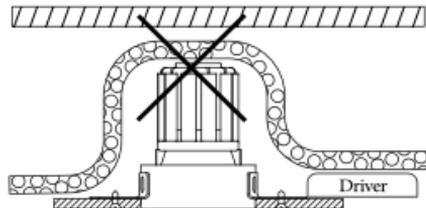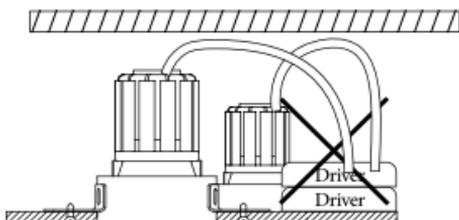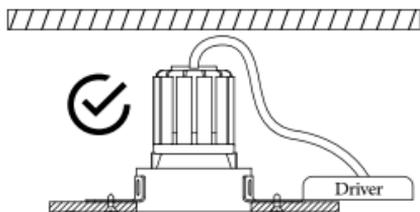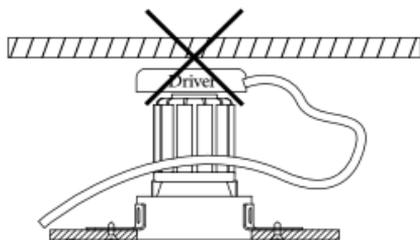

The luminaire must not be covered with any insulating materials



**Technical
support**

(+971) 522 56 71 07

NEXO.COM